

Report No.:91.09012-Pendant Lighting Test Time: 2023-06-27 17:23

Luminaire Property

Luminaire Category: Citizen 1206 3000K CRI90

Luminaire Description: 36D

Current: 0.173 A

Power Factor: 0.976

Voltage: 212.2 V

Power: 35.80 W

Photometric Results

CIE Class: Direct

Measurement Flux: 3590.5 lm

Downward Ratio: 100%

Horizontal Diffuse Angle(50%): H27.9

Vertical Diffuse Angle(50%): V27.9

Luminaire Efficacy Rating (LER): 100

Max. Intensity: 14397.05 cd

Total Rated Lamp Lumens: 3590.5 lm


Efficiency: 100%

Upward Ratio: 0%


Central Intensity: 14397.04 cd

Pos of Max. Intensity: H0 V0

Picture Of Luminaire



Luminous Intensity Distribution Curve

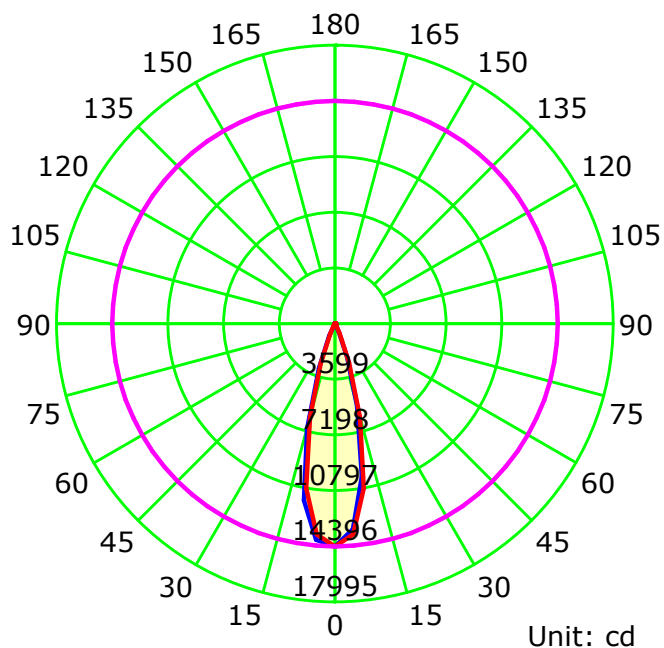

— C0-C180 — C90-C270 — G0

C Plane (°):0.0-180.0: 180.0

Test Lab:

Test Type: TYPE C

Temperature:

Operator:

Gamma Plane (°):0.0-90.0:5.0



Test Device: CHL-6E

Distance: 3.000 m

Humidity:

Inspector:


Luminous Intensity Distribution Curve

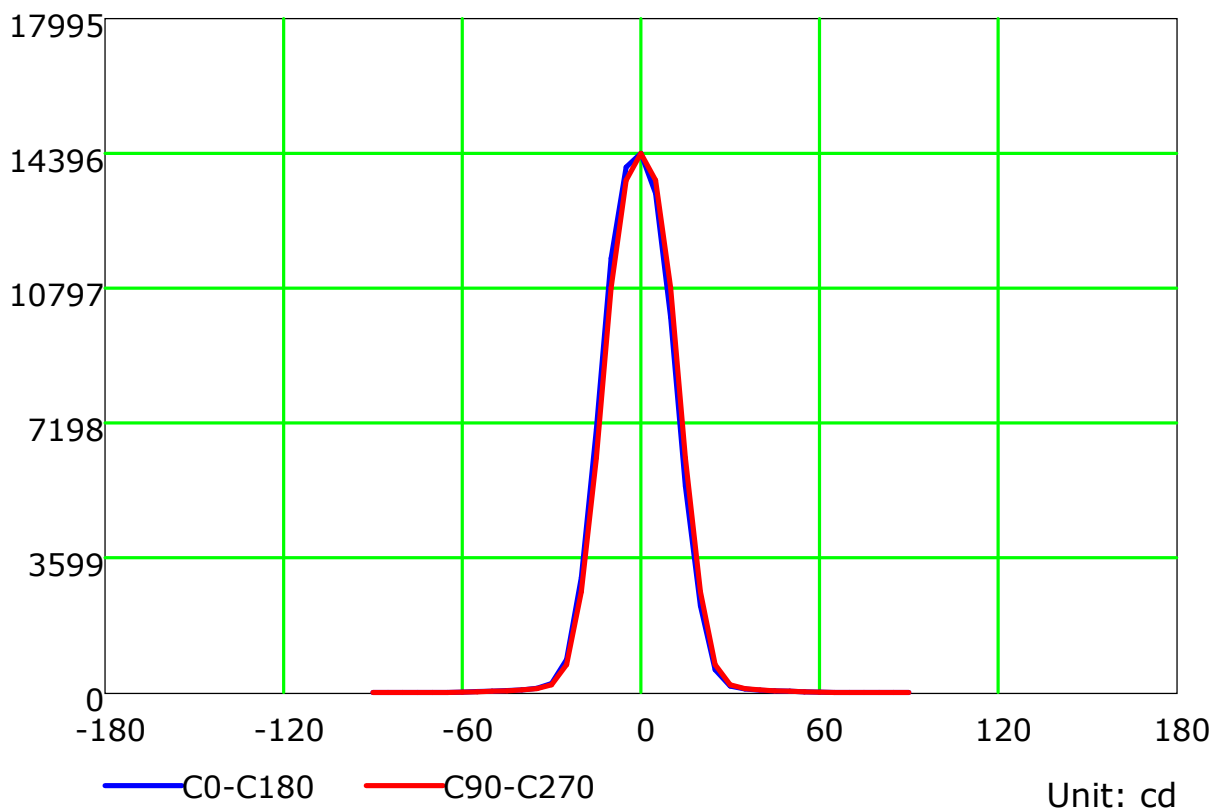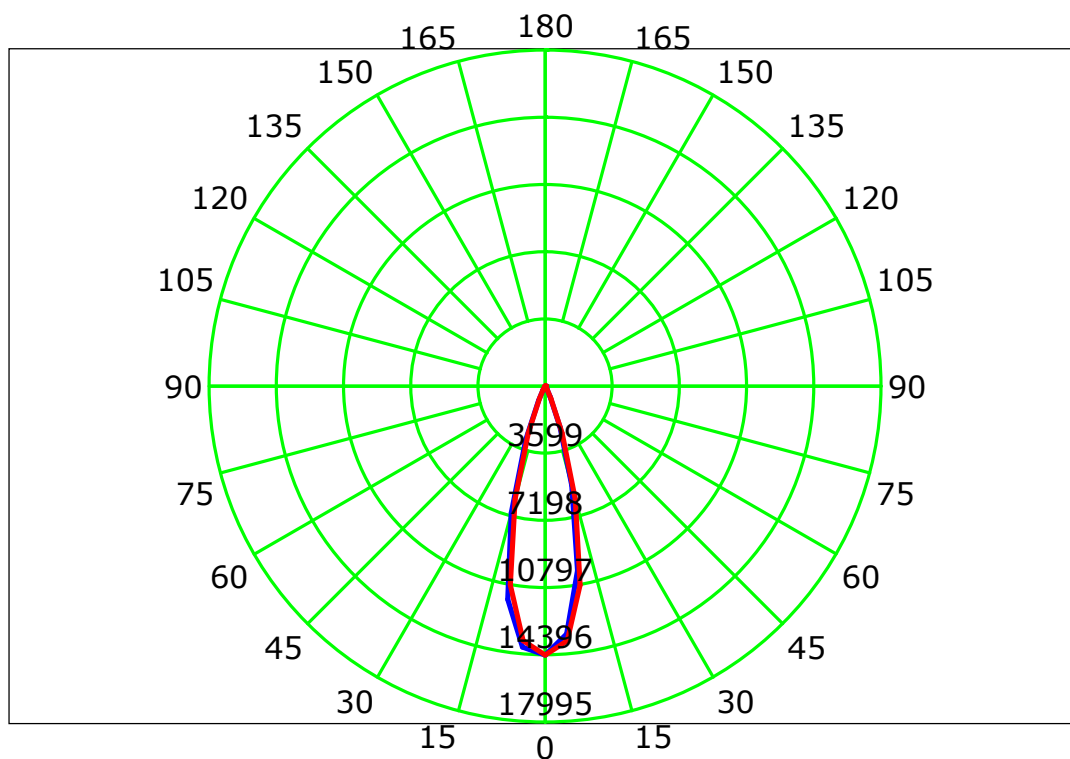

C Plane (°):0.0-180.0: 180.0
Test Lab:
Test Type: TYPE C
Temperature:
Operator:

Gamma Plane (°):0.0-90.0:5.0
Test Device: CHL-6E
Distance: 3.000 m
Humidity:
Inspector:

Isocandela (rectangle)

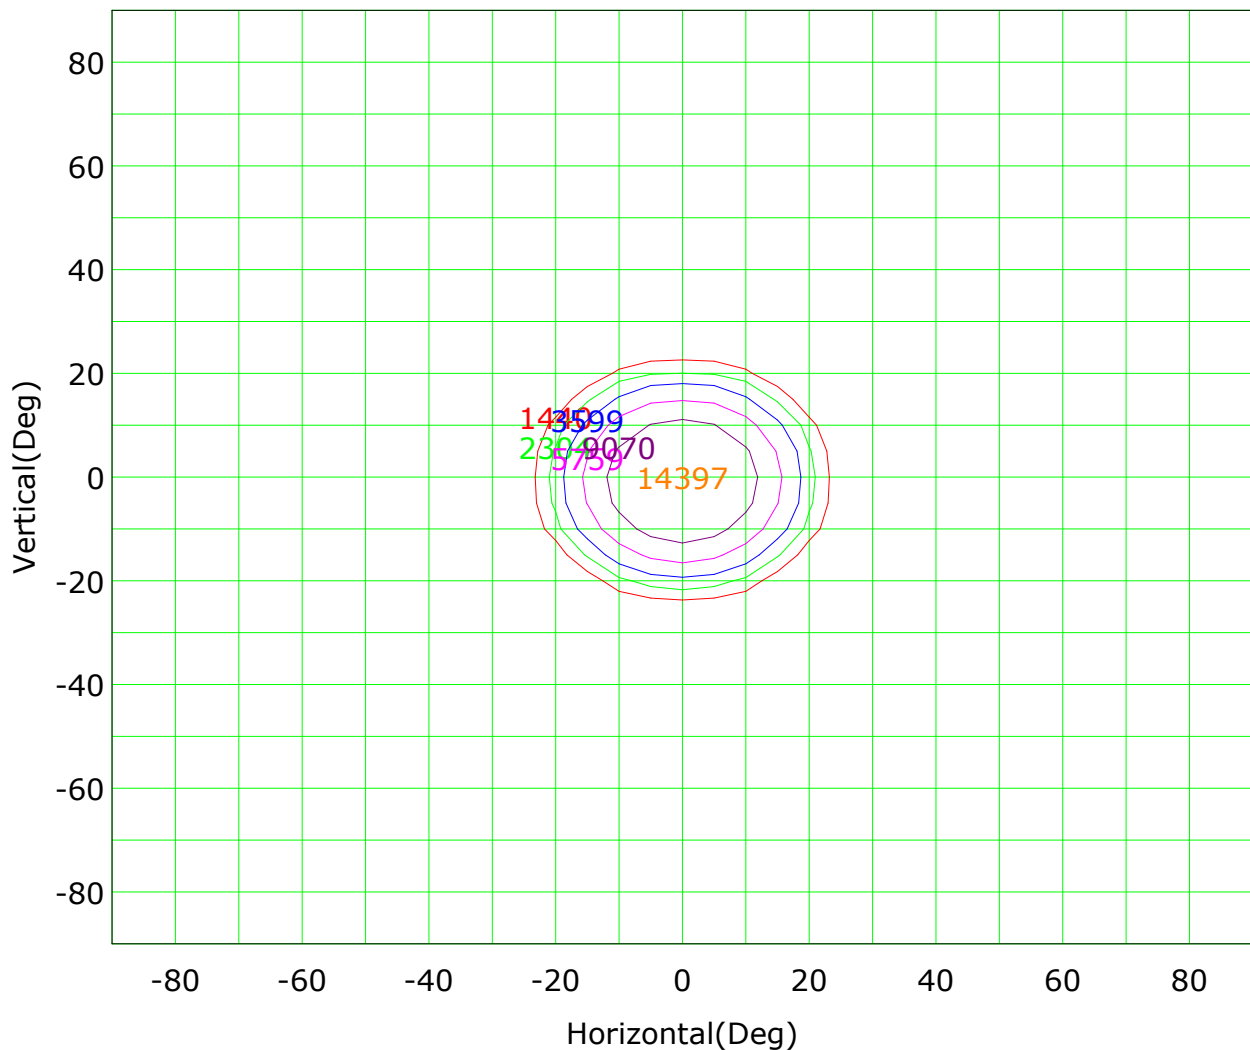

Imax (100%): 14397 cd

| | |
|-----------------|------------------|
| (10%): 1440 cd | (16%): 2304 cd |
| (25%): 3599 cd | (40%): 5759 cd |
| (63%): 9070 cd | (100%): 14397 cd |

C Plane (°):0.0-180.0: 180.0

Test Lab:

Test Type: TYPE C

Temperature:

Operator:

Gamma Plane (°):0.0-90.0:5.0


Test Device: CHL-6E

Distance: 3.000 m

Humidity:

Inspector:

IsoLux Plot

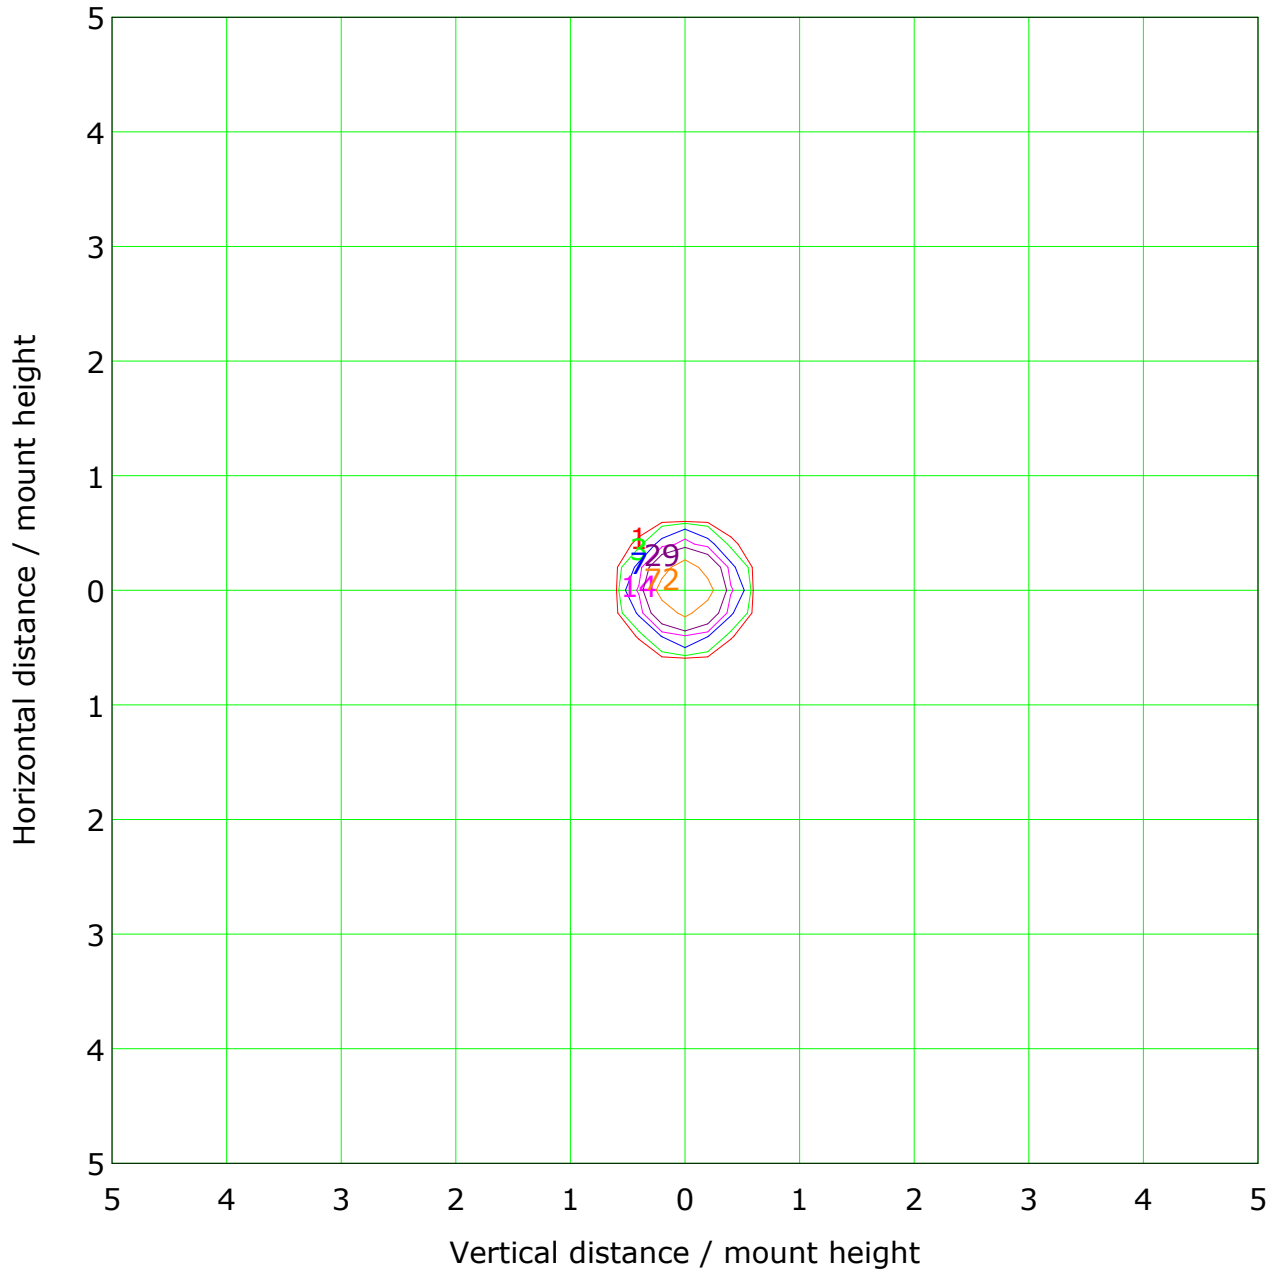

| | | | |
|----------------------|--------|-----------------------|-------|
| Mounting Height: 10m | | Max Lux(100%): 144 lx | |
| — (1%): | 1 lx | — (2%): | 3 lx |
| — (5%): | 7 lx | — (10%): | 14 lx |
| — (20%): | 29 lx | — (50%): | 72 lx |
| — (100%): | 144 lx | | |

C Plane (°):0.0-180.0: 180.0

Test Lab:

Test Type: TYPE C

Temperature:

Operator:

Gamma Plane (°):0.0-90.0:5.0


Test Device: CHL-6E

Distance: 3.000 m


Humidity:

Inspector:

Illuminance at a Distance

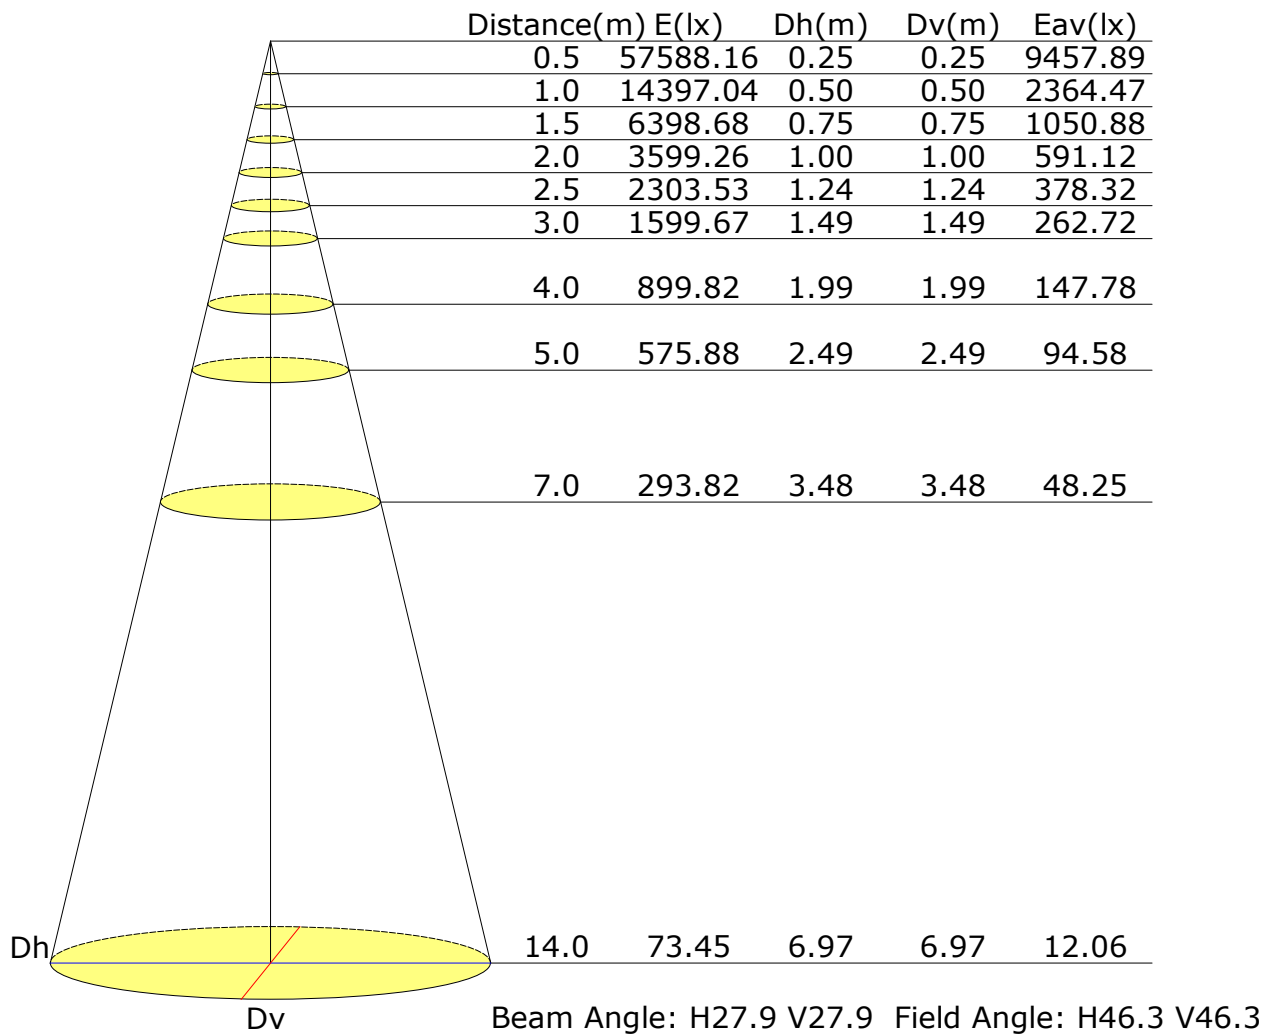

Vertical IsoLux Plot

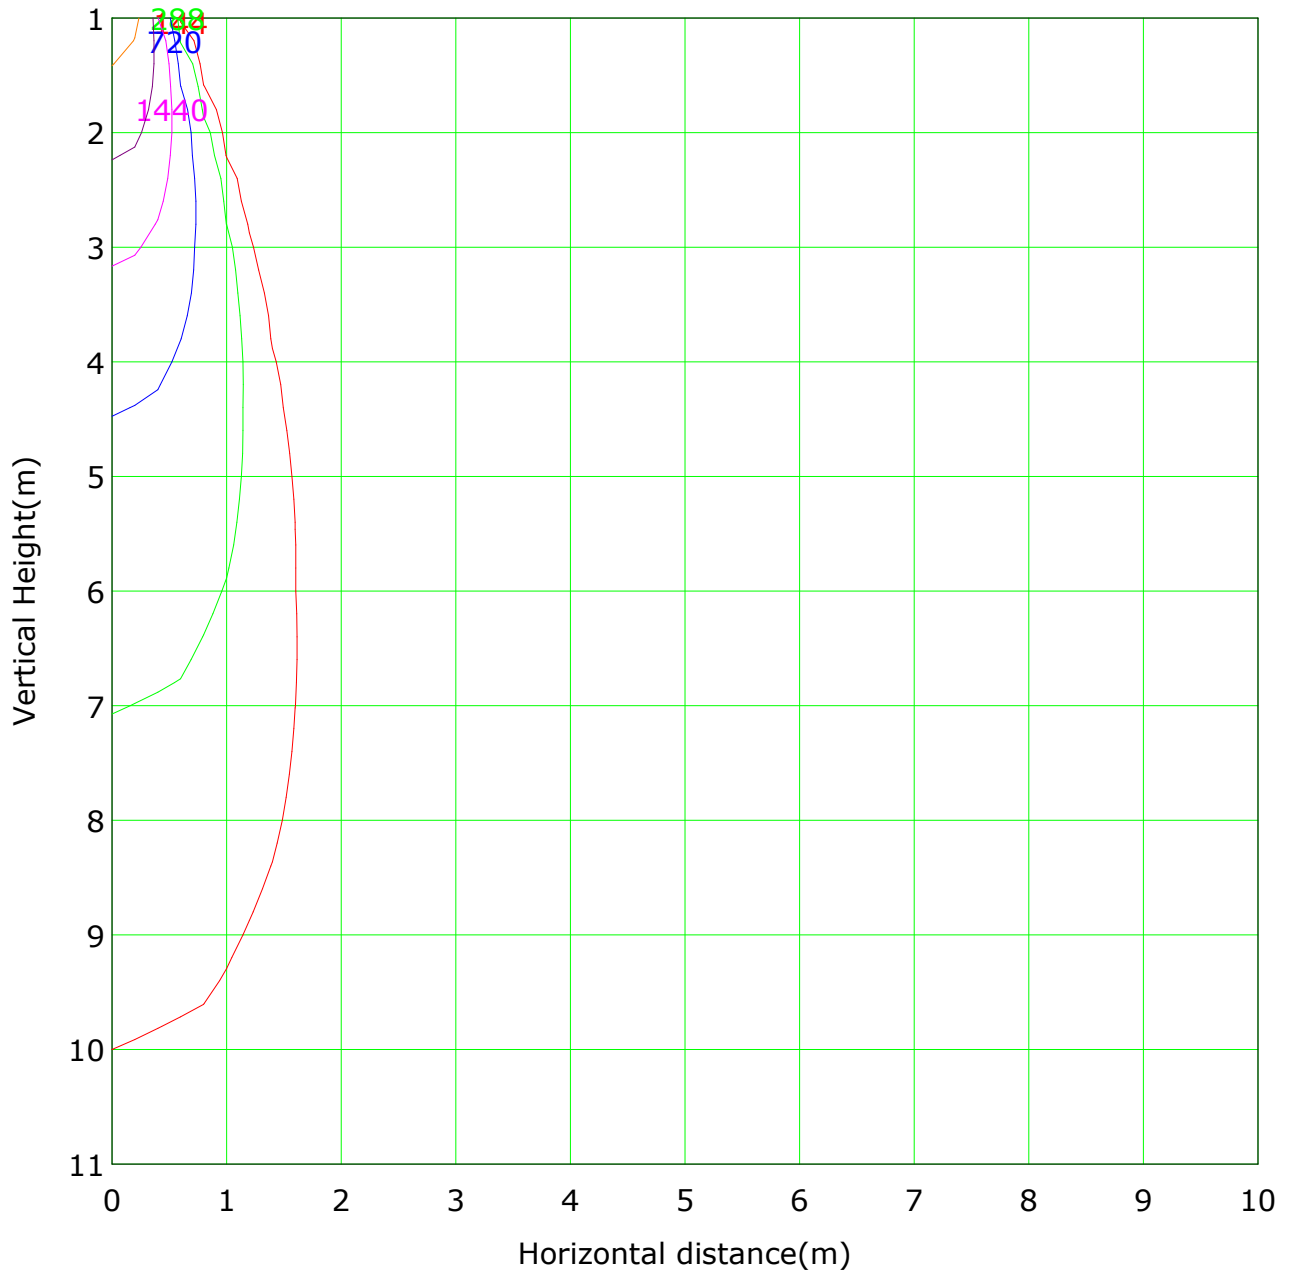


Lowest(m): 1m Highest(m): 11 Max Lux: 14397
— (1%): 144 lx — (2%): 288 lx
— (5%): 720 lx — (10%): 1440 lx
— (20%): 2879 lx — (50%): 7199 lx
— (100%): 14397 lx

C Plane (°):0.0-180.0: 180.0
Test Lab:
Test Type: TYPE C
Temperature:
Operator:

Gamma Plane (°):0.0-90.0:5.0
Test Device: CHL-6E
Distance: 3.000 m
Humidity:
Inspector:

The average illuminance effective figure

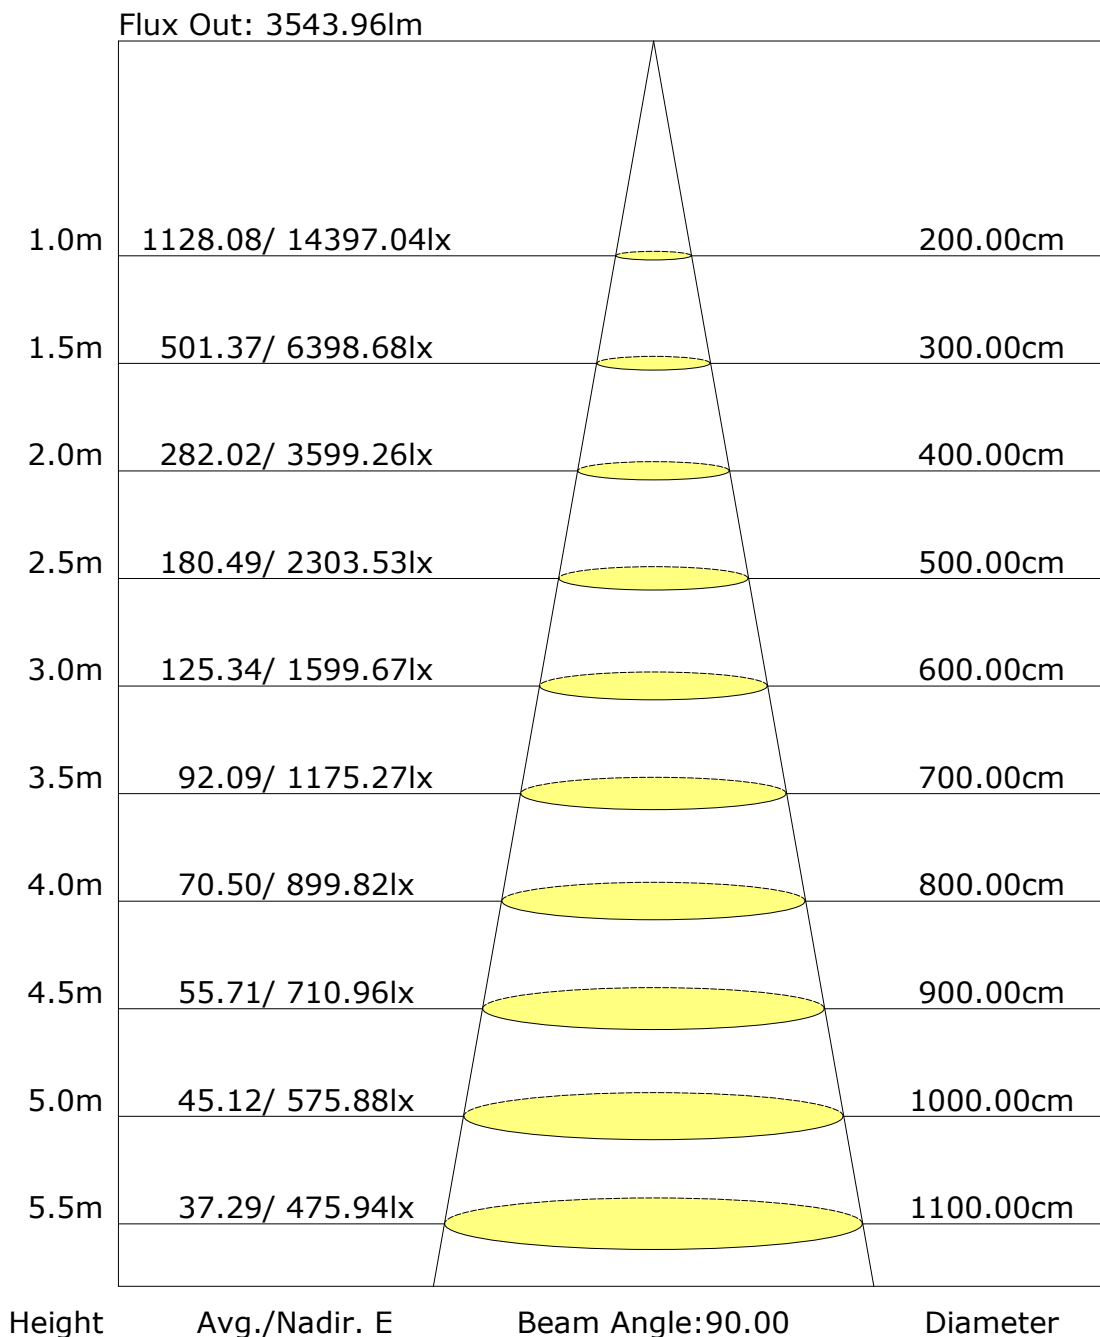

C Plane (°): 0.0-180.0: 180.0
Test Lab:
Test Type: TYPE C
Temperature:
Operator:

Gamma Plane (°): 0.0-90.0: 5.0
Test Device: CHL-6E
Distance: 3.000 m
Humidity:
Inspector:

Zonal Lumen

[illegible]

C Plane (°):0.0-180.0: 180.0

Test Lab:

Test Type: TYPE C

Temperature:

Operator:

Gamma Plane (°):0.0-90.0:5.0

Test Device: CHL-6E

Distance: 3.000 m

Humidity:

Inspector:

Candlepower Table

Unit: cd

[illegible]

C Plane (°):0.0-180.0: 180.0

Test Lab:

Test Type: TYPE C

Temperature:

Operator:

Gamma Plane (°):0.0-90.0:5.0

Test Device: CHL-6E

Distance: 3.000 m

Humidity:

Inspector: