



91.06213 EMMA Pendant Lighting

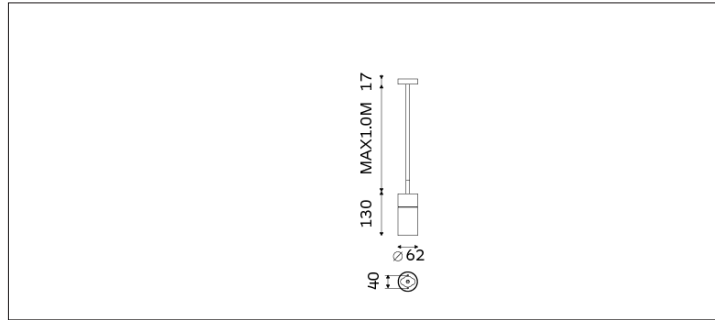

| | |
|--------------------------------|--------------------------|
| Light Distribution | EMMA Pendant Lighting |
| Colour Temperature | 2700/3000/3500/4000K |
| Colour Rendition Index | CRI 90 |
| Optics | LENS |
| Beam Angle | 16D/25D/35D |
| Installation method | Surface Mounted |
| Connected Load | 14W |
| Luminous Flux Of The Luminaire | 1305lm |
| Luminaire Efficacy | 94lm/W |
| Colour Deviation | SDCM <5 |
| Light Source | LED |
| LED Type | COB |
| Dimming Method | Triac/1-10V/ Dali |
| Cover Material | Aluminum |
| Body Material | Aluminum |
| IP Rating | IP20 |
| Housing Colour | Sandy White/ Sandy Black |
| Weight | 0.5Kg |
| Technical Region | 220-240V 50/60Hz |

| Light Beam Talbe | | |
|------------------|-------|------|
| h(m) | E(lx) | D(m) |
| | | 25° |
| 1.0 | 6267 | 0.45 |
| 2.0 | 1567 | 0.90 |
| 3.0 | 696 | 1.35 |
| 4.0 | 392 | 1.80 |
| 5.0 | 251 | 2.20 |

Application areas: retail, museums, hospitality, residential, offices and lobbies.