
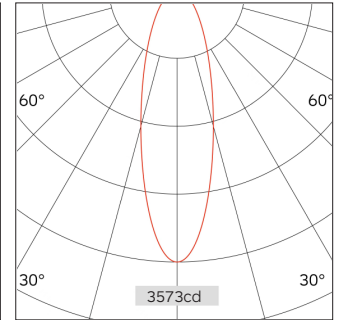


51.05511 NEK Recessed Downlight-Fixed

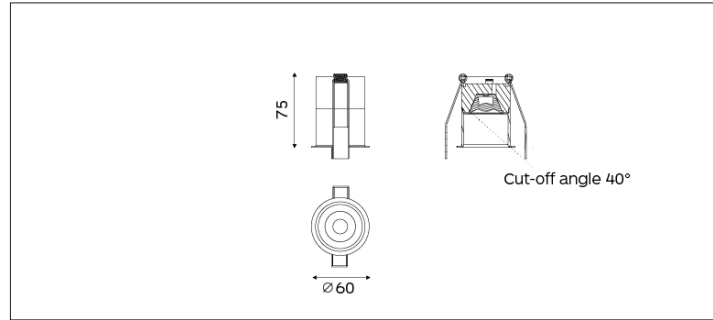

Light Distribution	NEK Recessed Downlight
Colour Temperature	2700/3000/3500/4000K
Colour Rendition Index	CRI 90
Optics	LENS
Beam Angle	17D/20D/30D
Cut Out	55mm
Connected Load	8W
Luminous Flux Of The Luminaire	531lm
Luminaire Efficacy	73m/W
Colour Deviation	SDCM <5
Light Source	LED
LED Type	COB
Dimming Method	Triac/1-10V/ Dali
Cover Material	Aluminum
Body Material	Aluminum
IP Rating	IP20
Housing Colour	Sandy White/ Sandy Black
Weight	0.35Kg
Technical Region	220-240V 50/60Hz

Light Beam Table		
h(m)	E(lx)	D(m)
		20°
1.0	3541	0.36
2.0	885	0.73
3.0	393	1.09
4.0	221	1.46
5.0	142	1.82

Application areas: High end residential and retail projects, hotels, museums and galleries.