
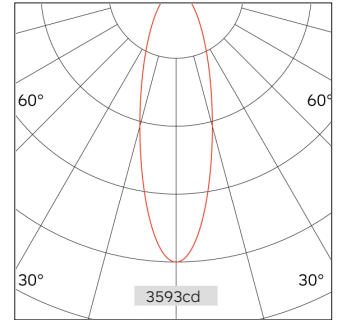
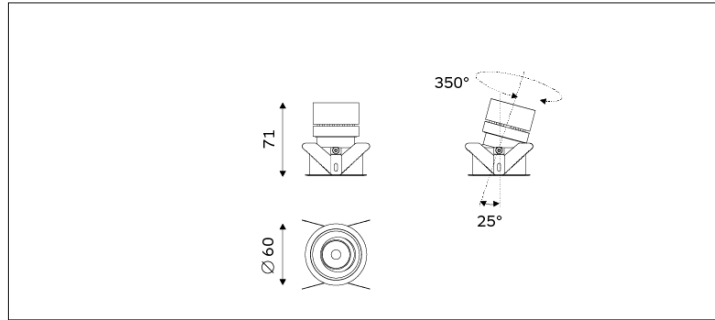


# 52.05518 SILO Recessed Downlight

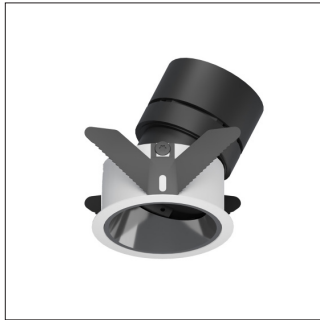

Light Distribution	SILO Recessed Downlight
Colour Temperature	2700/3000/3500/4000K
Colour Rendition Index	CRI 90
Optics	LENS
Beam Angle	18D/24D/29D
Cut Out	55mm
Connected Load	10W
Luminous Flux Of The Luminaire	504lm
Luminaire Efficacy	55lm/W
Colour Deviation	SDCM <5
Light Source	LED
LED Type	COB
Dimming Method	Triac/1-10V/ Dali
Cover Material	Aluminum
Body Material	Aluminum
IP Rating	IP20
Housing Colour	Sandy White/ Sandy Black
Weight	0.3Kg
Technical Region	220-240V 50/60Hz

Light Beam Talbe		
h(m)	E(lx)	D(m)
		24°
1.0	3593	0.32
2.0	898	0.64
3.0	399	0.96
4.0	225	1.28
5.0	144	1.60

Star hotel rooms, aisles, villas, high-end private clubs, restaurants and other commercial spaces (such as furniture stores, ceramic and sanitary ware chain shops, brand chain shops and other commercial atmosphere lighting applications)