

Report No.: 56.03711 NOVAL Downlight

Test Time: 2023-07-04 20:13

## Luminaire Property

Luminaire Category: Bridgelux V4HD 3000K CRI90

Voltage: 219.9 V

Current: 0.055 A

Power: 6.40 W

Power Factor: 0.533

## Photometric Results

CIE Class: Direct

Measurement Flux: 421.3 lm

Downward Ratio: 100%

Horizontal Diffuse Angle(50%): H27.4

Vertical Diffuse Angle(50%): V27.4

Luminaire Efficacy Rating (LER): 66

Max. Intensity: 1633.18 cd

Total Rated Lamp Lumens: 421.3 lm

Efficiency: 100%

Upward Ratio: 0%


Central Intensity: 1603.72 cd

Pos of Max. Intensity: H0 V5

Picture Of Luminaire



Luminous Intensity Distribution Curve

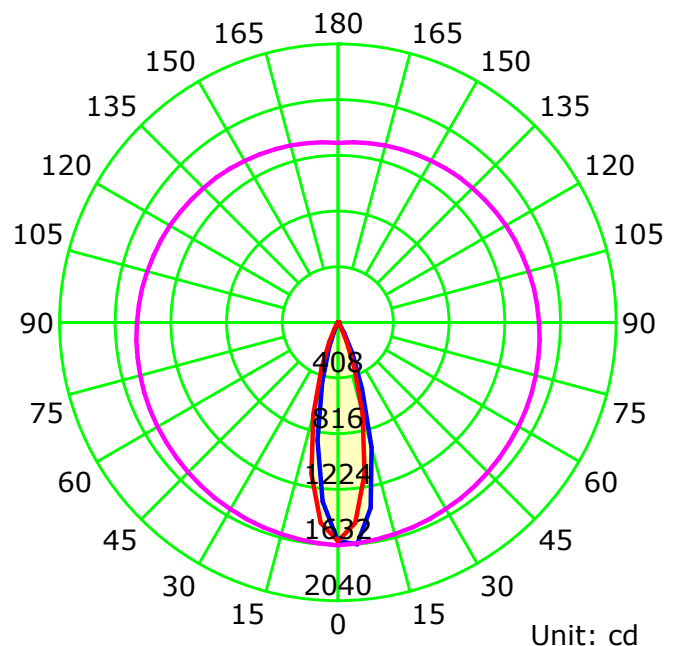

— C0-C180 — C90-C270 — G5

C Plane (°):0.0-180.0: 180.0

Test Lab:

Test Type: TYPE C

Temperature:

Operator:

Gamma Plane (°):0.0-90.0:5.0



Test Device: CHL-6E

Distance: 3.000 m

Humidity:

Inspector:


## Luminous Intensity Distribution Curve

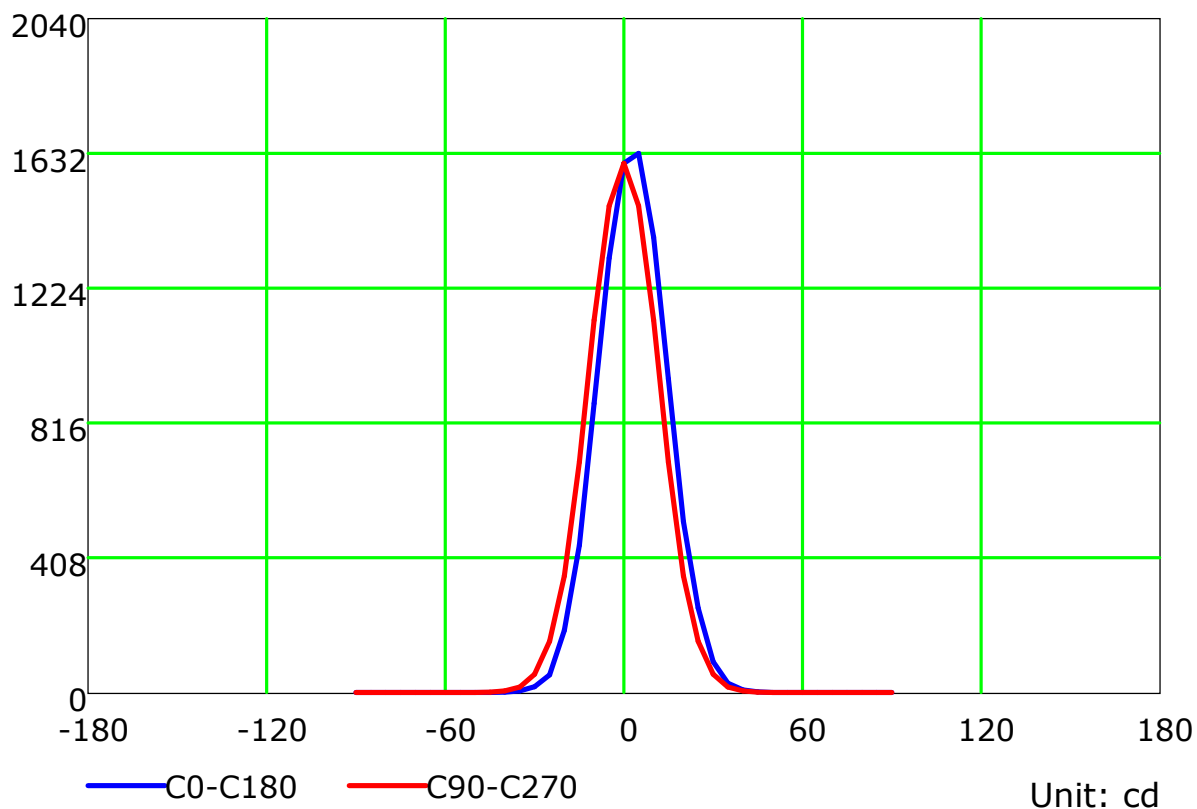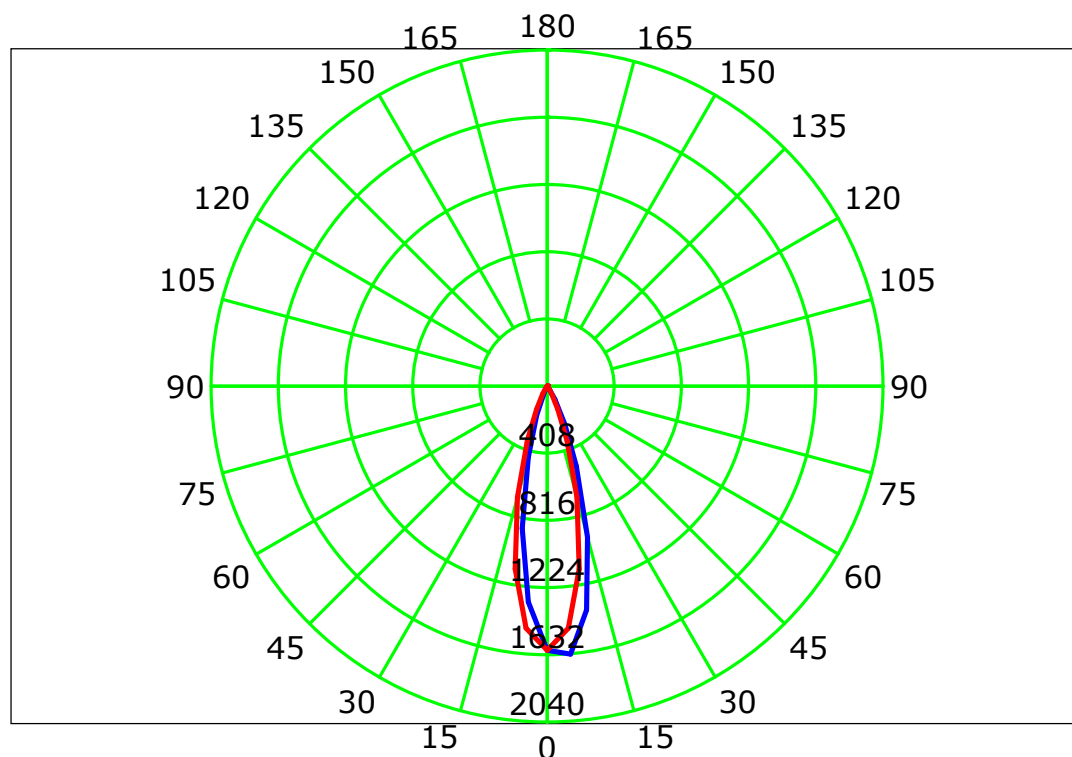

C Plane (°):0.0-180.0: 180.0  
Test Lab:  
Test Type: TYPE C  
Temperature:  
Operator:

Gamma Plane (°):0.0-90.0:5.0  
Test Device: CHL-6E  
Distance: 3.000 m  
Humidity:  
Inspector:

## Isocandela (rectangle)

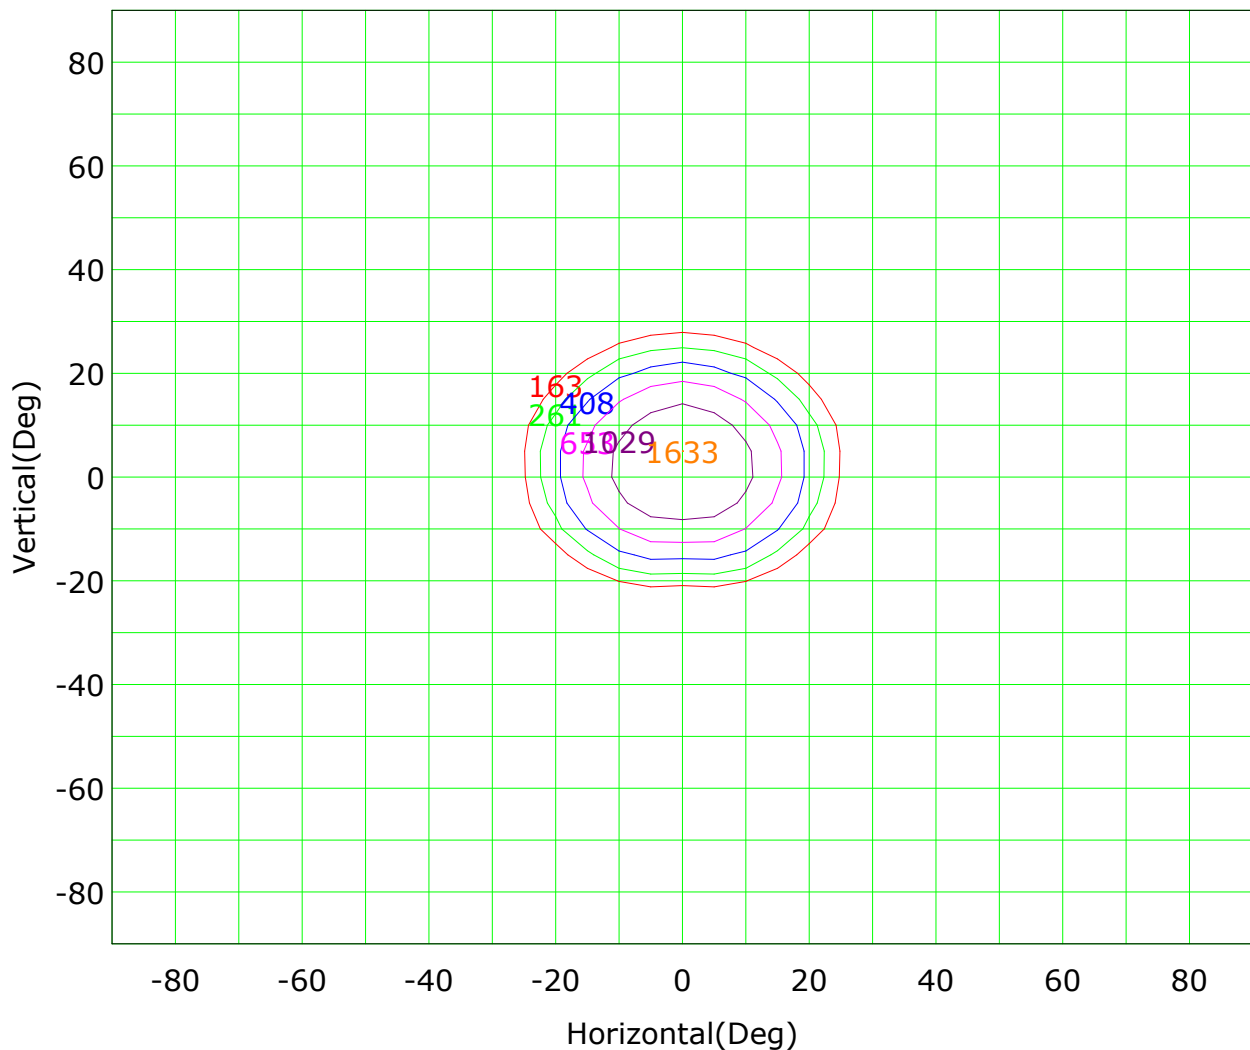

Imax (100%): 1633 cd

( 10%): 163 cd	( 16%): 261 cd
( 25%): 408 cd	( 40%): 653 cd
( 63%): 1029 cd	(100%): 1633 cd

C Plane (°):0.0-180.0: 180.0

Test Lab:

Test Type: TYPE C

Temperature:

Operator:

Gamma Plane (°):0.0-90.0:5.0


Test Device: CHL-6E

Distance: 3.000 m

Humidity:

Inspector:

## IsoLux Plot

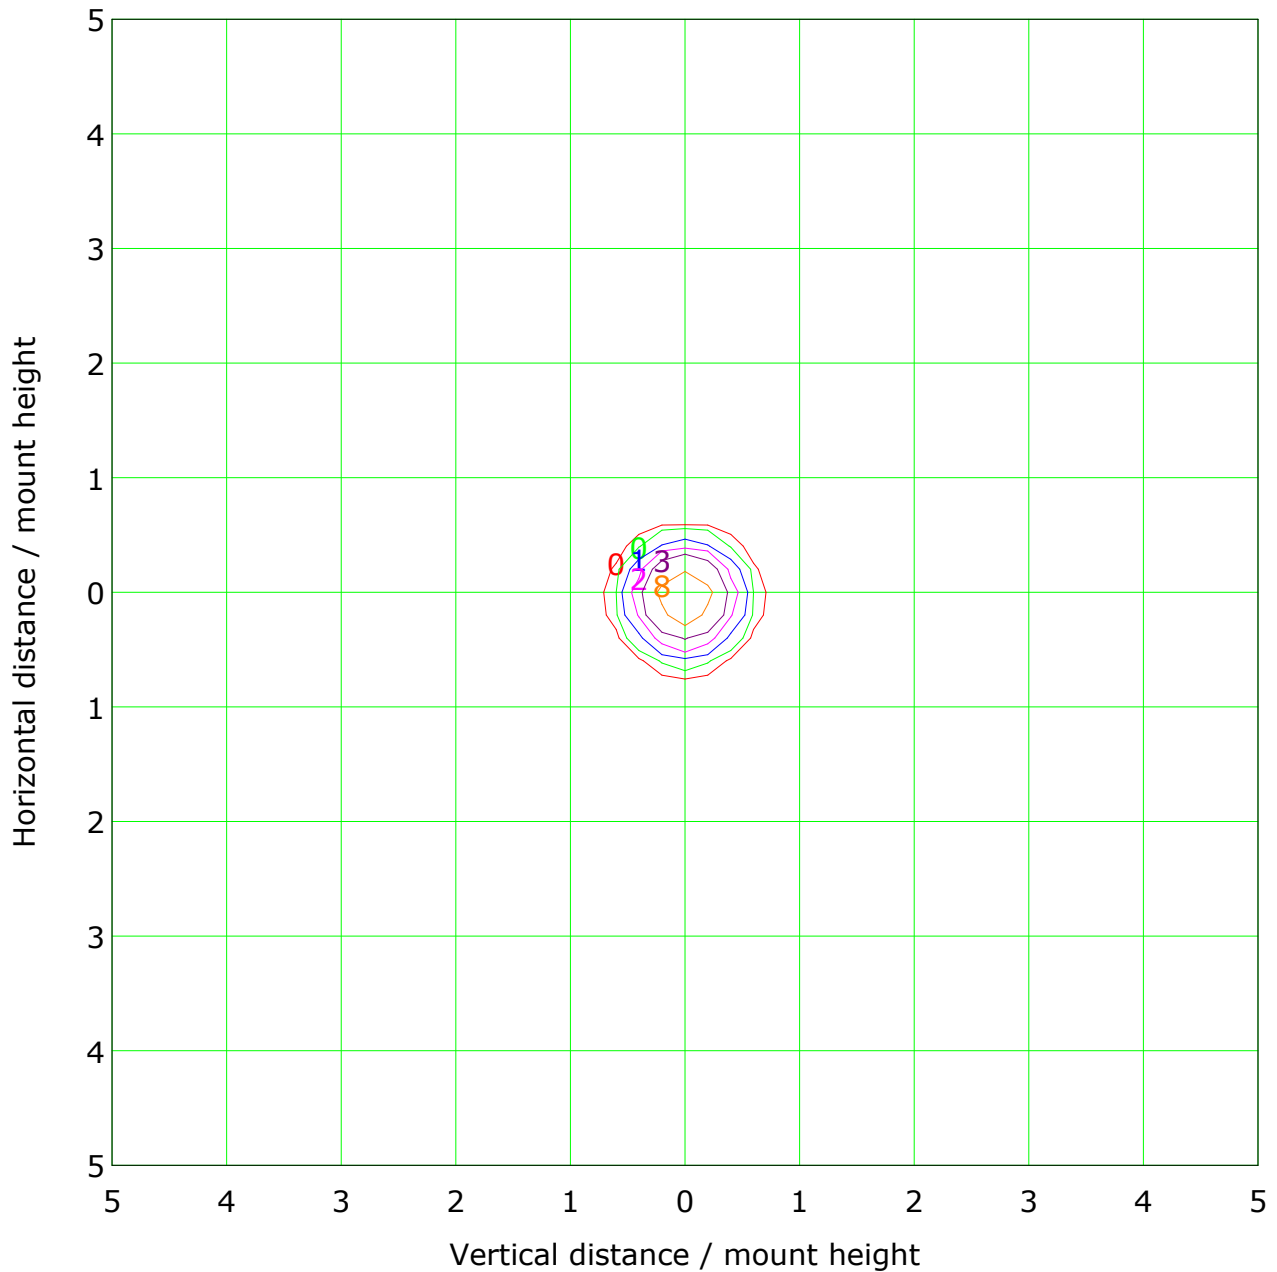


Mounting Height: 10m    Max Lux(100%): 16 lx			
— ( 1%):	0 lx	— ( 2%):	0 lx
— ( 5%):	1 lx	— ( 10%):	2 lx
— ( 20%):	3 lx	— ( 50%):	8 lx
— (100%):	16 lx		


C Plane (°):0.0-180.0: 180.0  
Test Lab:  
Test Type: TYPE C  
Temperature:  
Operator:

Gamma Plane (°):0.0-90.0:5.0  
Test Device: CHL-6E  
Distance: 3.000 m  
Humidity:  
Inspector:

## Illuminance at a Distance

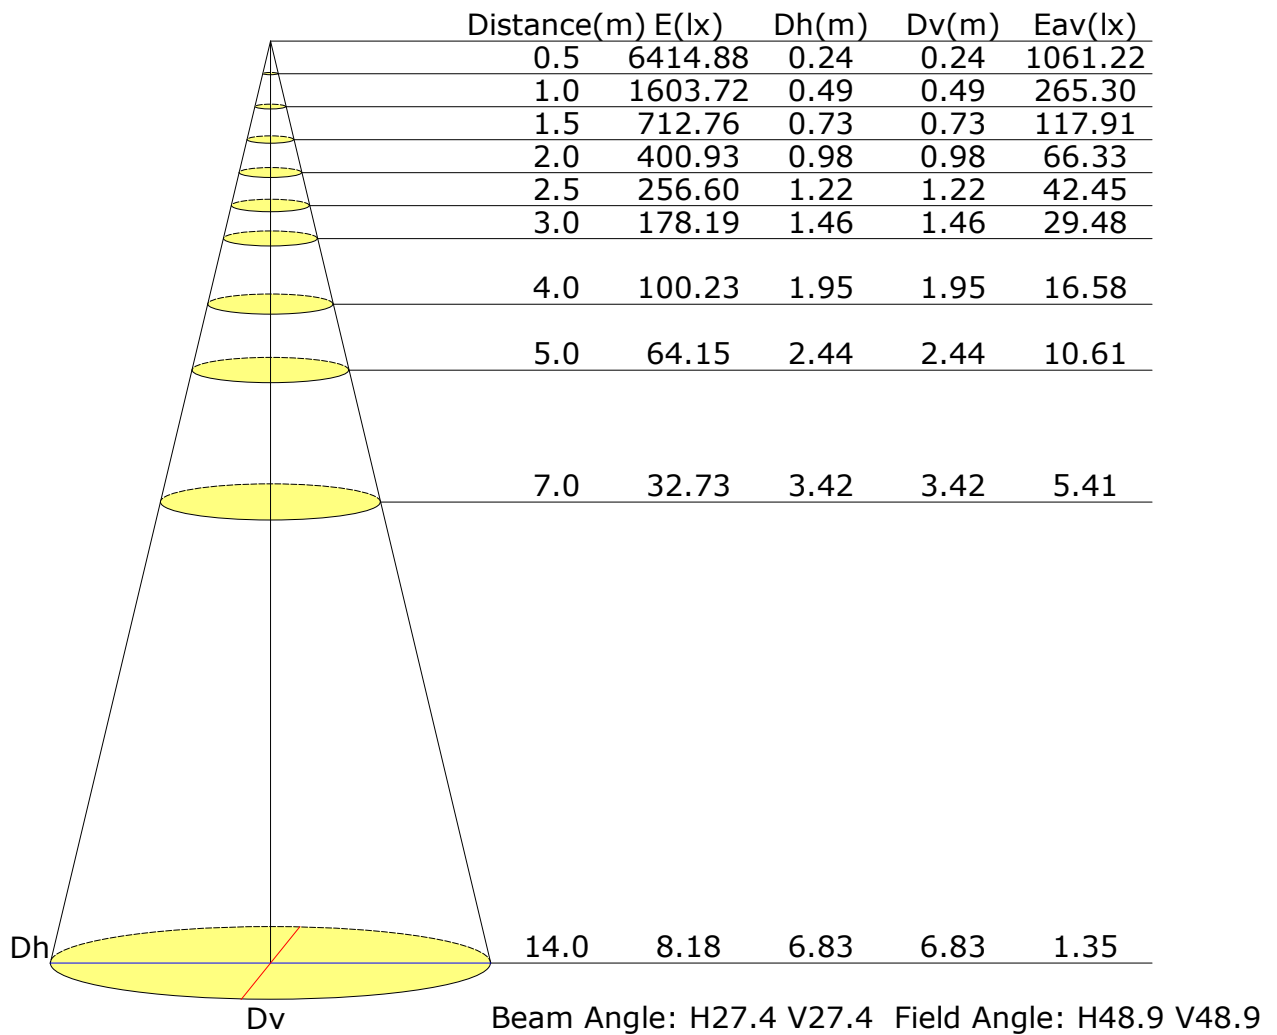

## Vertical IsoLux Plot

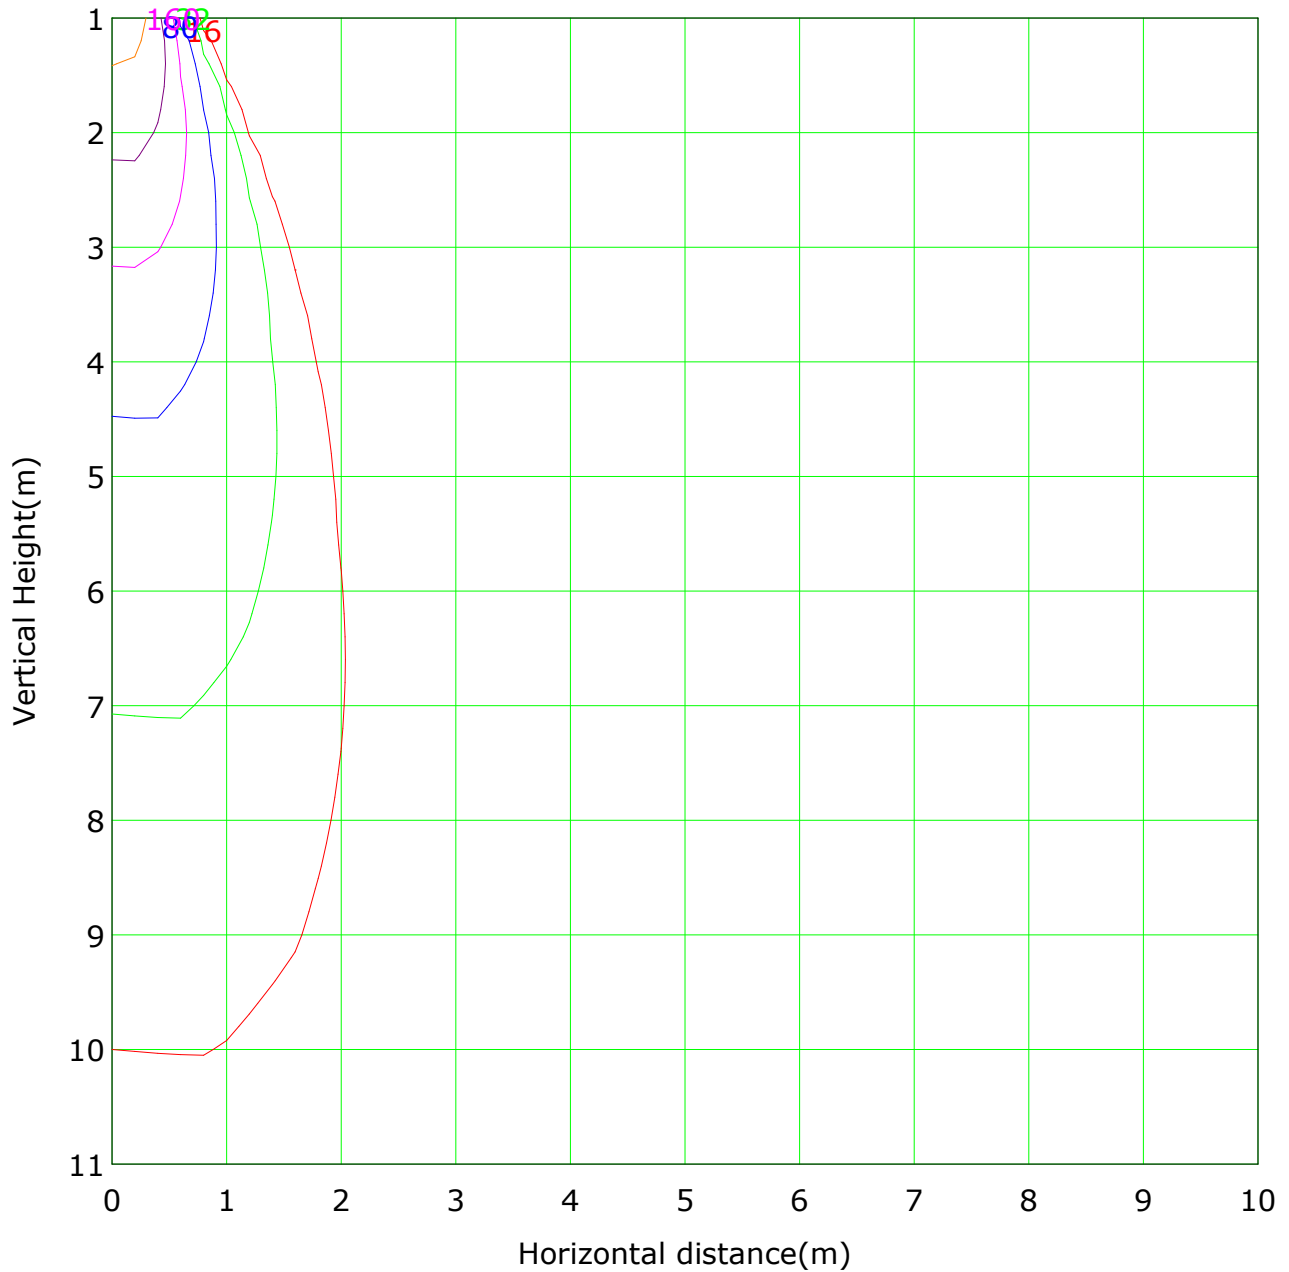

Lowest(m): 1m    Highest(m): 11    Max Lux: 1604

( 1%): 16 lx	( 2%): 32 lx
( 5%): 80 lx	( 10%): 160 lx
( 20%): 321 lx	( 50%): 802 lx
(100%): 1604 lx	

C Plane (°):0.0-180.0: 180.0

Test Lab:

Test Type: TYPE C

Temperature:

Operator:

Gamma Plane (°):0.0-90.0:5.0


Test Device: CHL-6E

Distance: 3.000 m

Humidity:

Inspector:

## The average illuminance effective figure

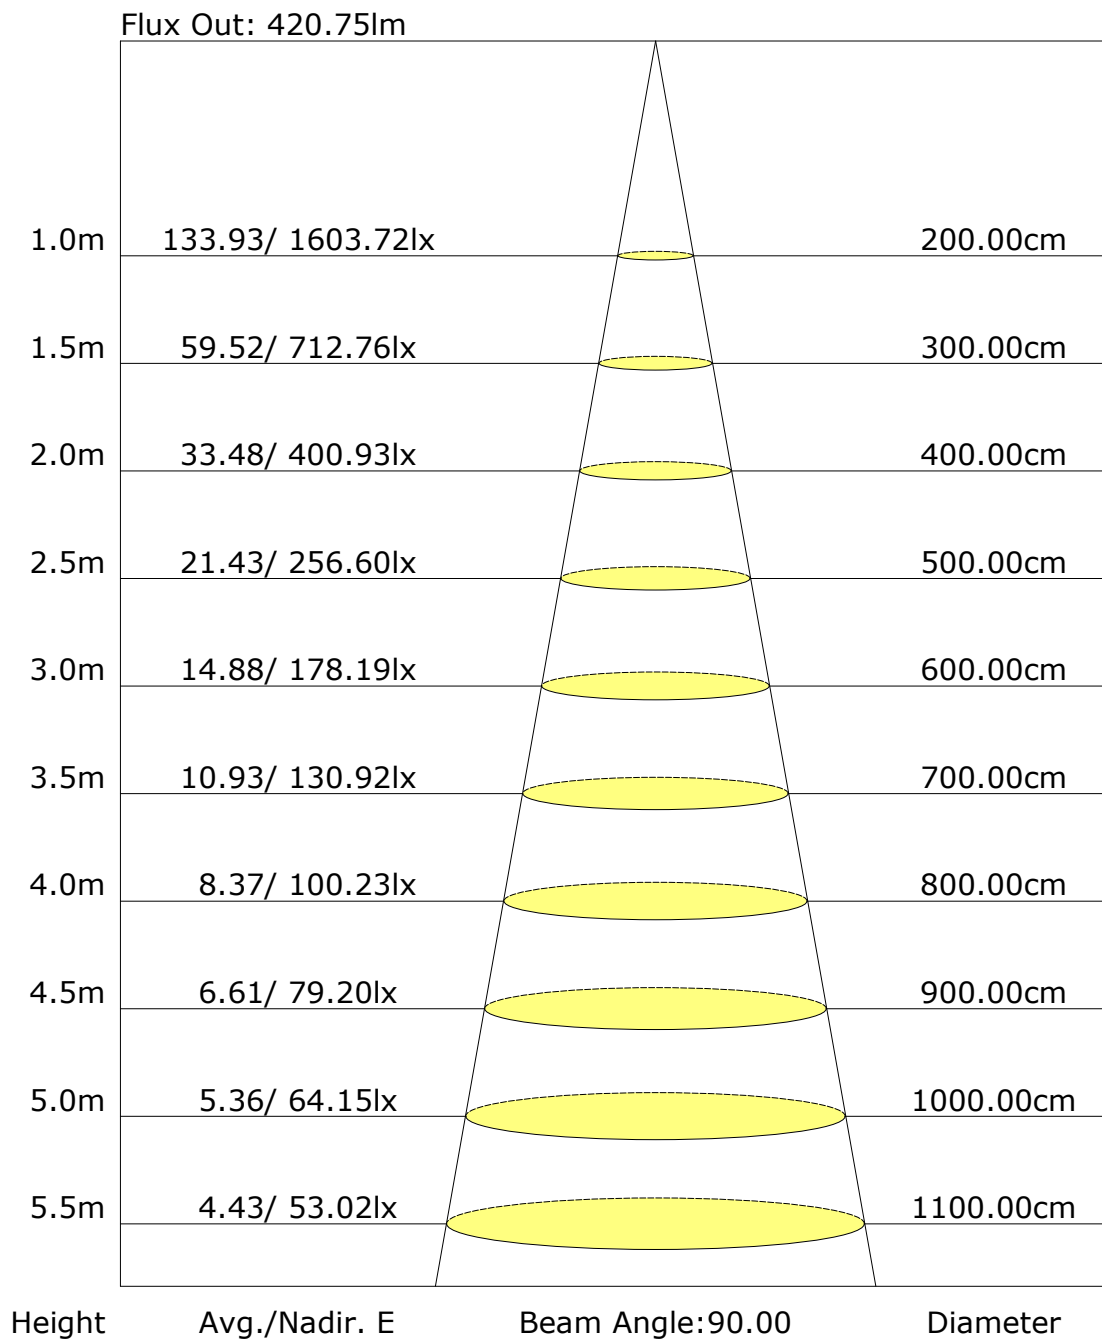

C Plane (°): 0.0-180.0: 180.0  
Test Lab:  
Test Type: TYPE C  
Temperature:  
Operator:

Gamma Plane (°): 0.0-90.0: 5.0  
Test Device: CHL-6E  
Distance: 3.000 m  
Humidity:  
Inspector:

## Zonal Lumen

[illegible]

Inspector:



## Candlepower Table

Unit: cd

[illegible]

C Plane (°):0.0-180.0: 180.0

Test Lab:

Test Type: TYPE C

Temperature:

Operator:

Gamma Plane (°):0.0-90.0:5.0

Test Device: CHL-6E

Distance: 3.000 m

Humidity:

Inspector: