

Report No.: 56.03713 NOVAL Downlight

Test Time: 2023-07-04 20:10

## Luminaire Property

Luminaire Category: Bridgelux V4HD 3000K CRI90

Voltage: 218.0 V

Current: 0.055 A

Power: 6.40 W

Power Factor: 0.528

## Photometric Results

CIE Class: Direct

Measurement Flux: 448.9 lm

Downward Ratio: 100%

Horizontal Diffuse Angle(50%): H20.5

Vertical Diffuse Angle(50%): V20.5

Luminaire Efficacy Rating (LER): 70

Max. Intensity: 2880.28 cd

Total Rated Lamp Lumens: 448.9 lm


Efficiency: 100%

Upward Ratio: 0%


Central Intensity: 2880.27 cd

Pos of Max. Intensity: H0 V0

Picture Of Luminaire



Luminous Intensity Distribution Curve

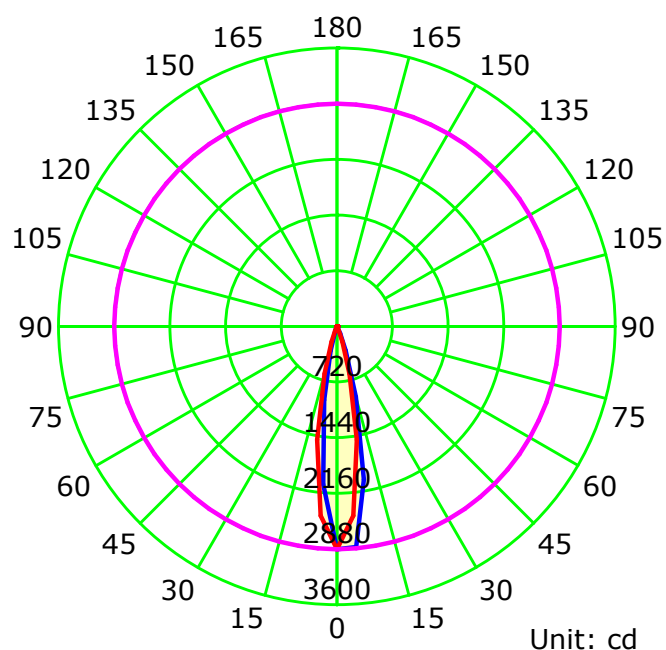

— C0-C180 — C90-C270 — G0

C Plane (°):0.0-180.0: 180.0

Test Lab:

Test Type: TYPE C

Temperature:

Operator:

Gamma Plane (°):0.0-90.0:5.0



Test Device: CHL-6E

Distance: 3.000 m

Humidity:

Inspector:


## Luminous Intensity Distribution Curve

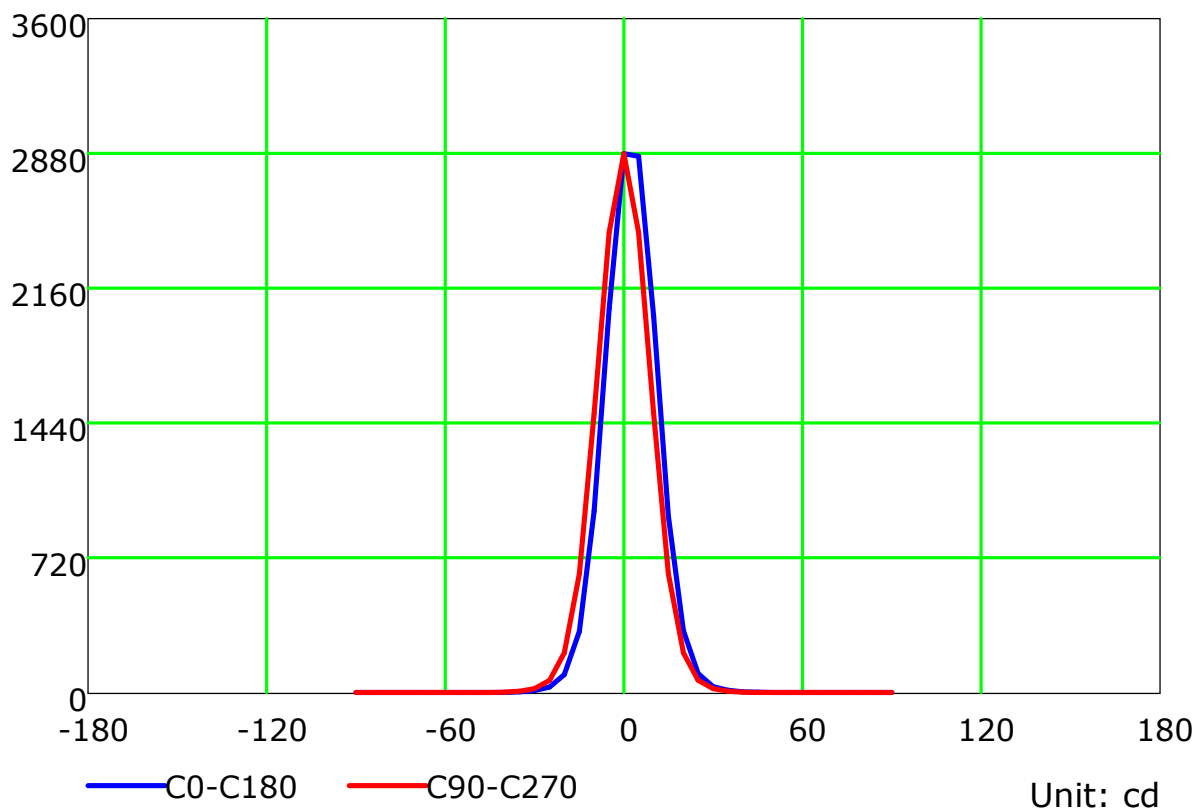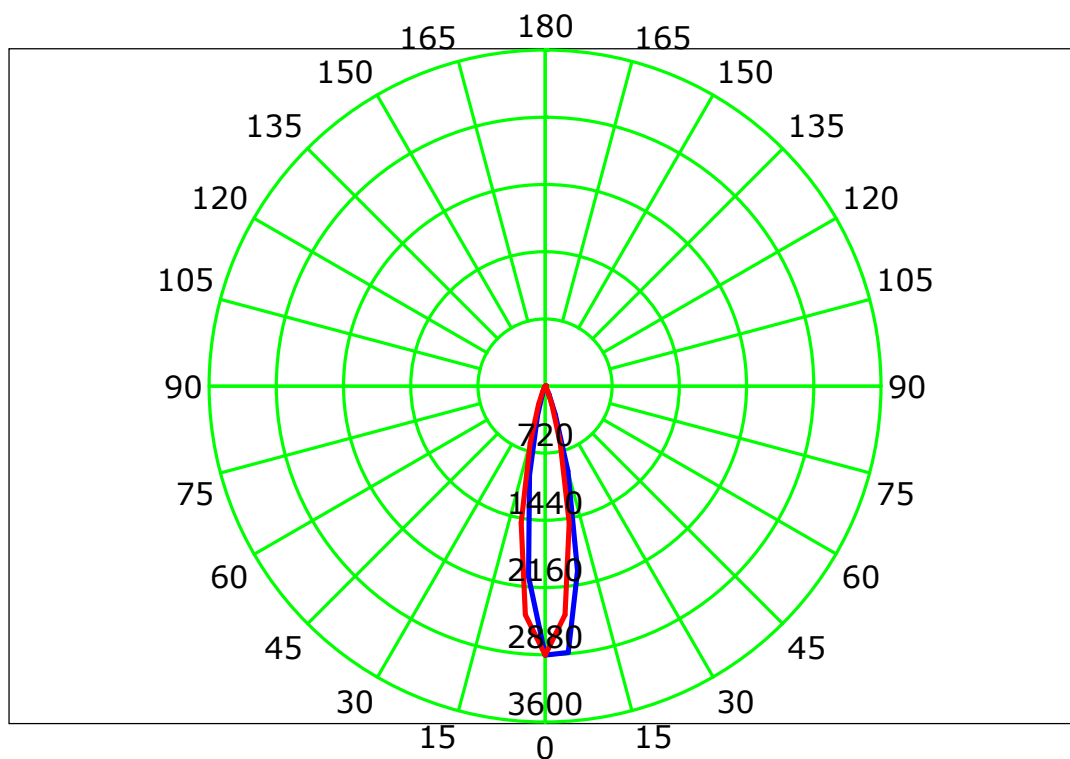

C Plane (°):0.0-180.0: 180.0  
Test Lab:  
Test Type: TYPE C  
Temperature:  
Operator:

Gamma Plane (°):0.0-90.0:5.0  
Test Device: CHL-6E  
Distance: 3.000 m  
Humidity:  
Inspector:

## Isocandela (rectangle)

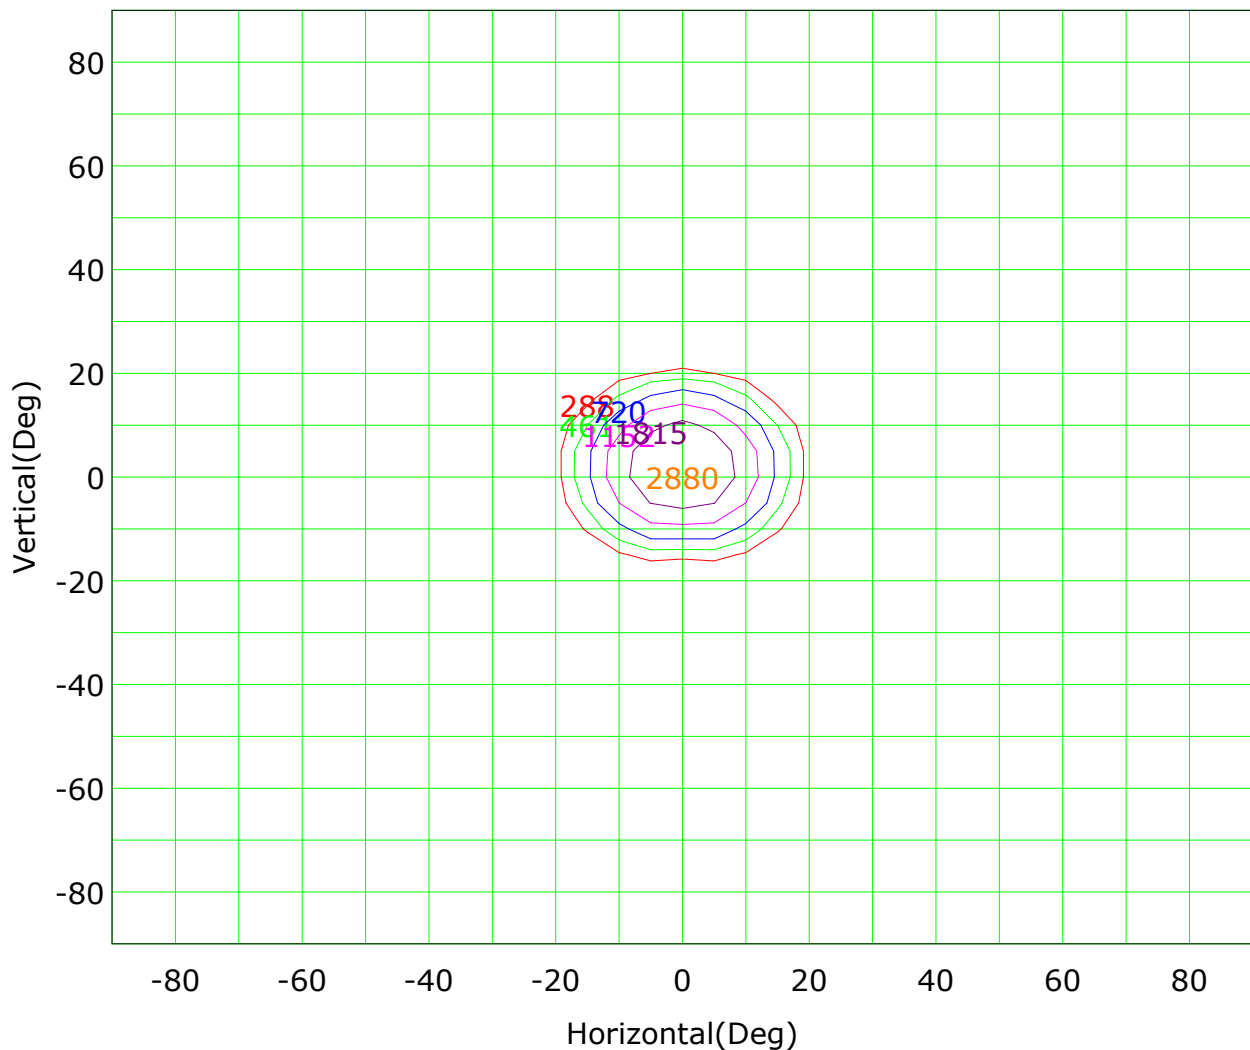

Imax (100%): 2880 cd

( 10%): 288 cd	( 16%): 461 cd
( 25%): 720 cd	( 40%): 1152 cd
( 63%): 1815 cd	(100%): 2880 cd

C Plane (°):0.0-180.0: 180.0

Test Lab:

Test Type: TYPE C

Temperature:

Operator:

Gamma Plane (°):0.0-90.0:5.0


Test Device: CHL-6E

Distance: 3.000 m

Humidity:

Inspector:

## IsoLux Plot

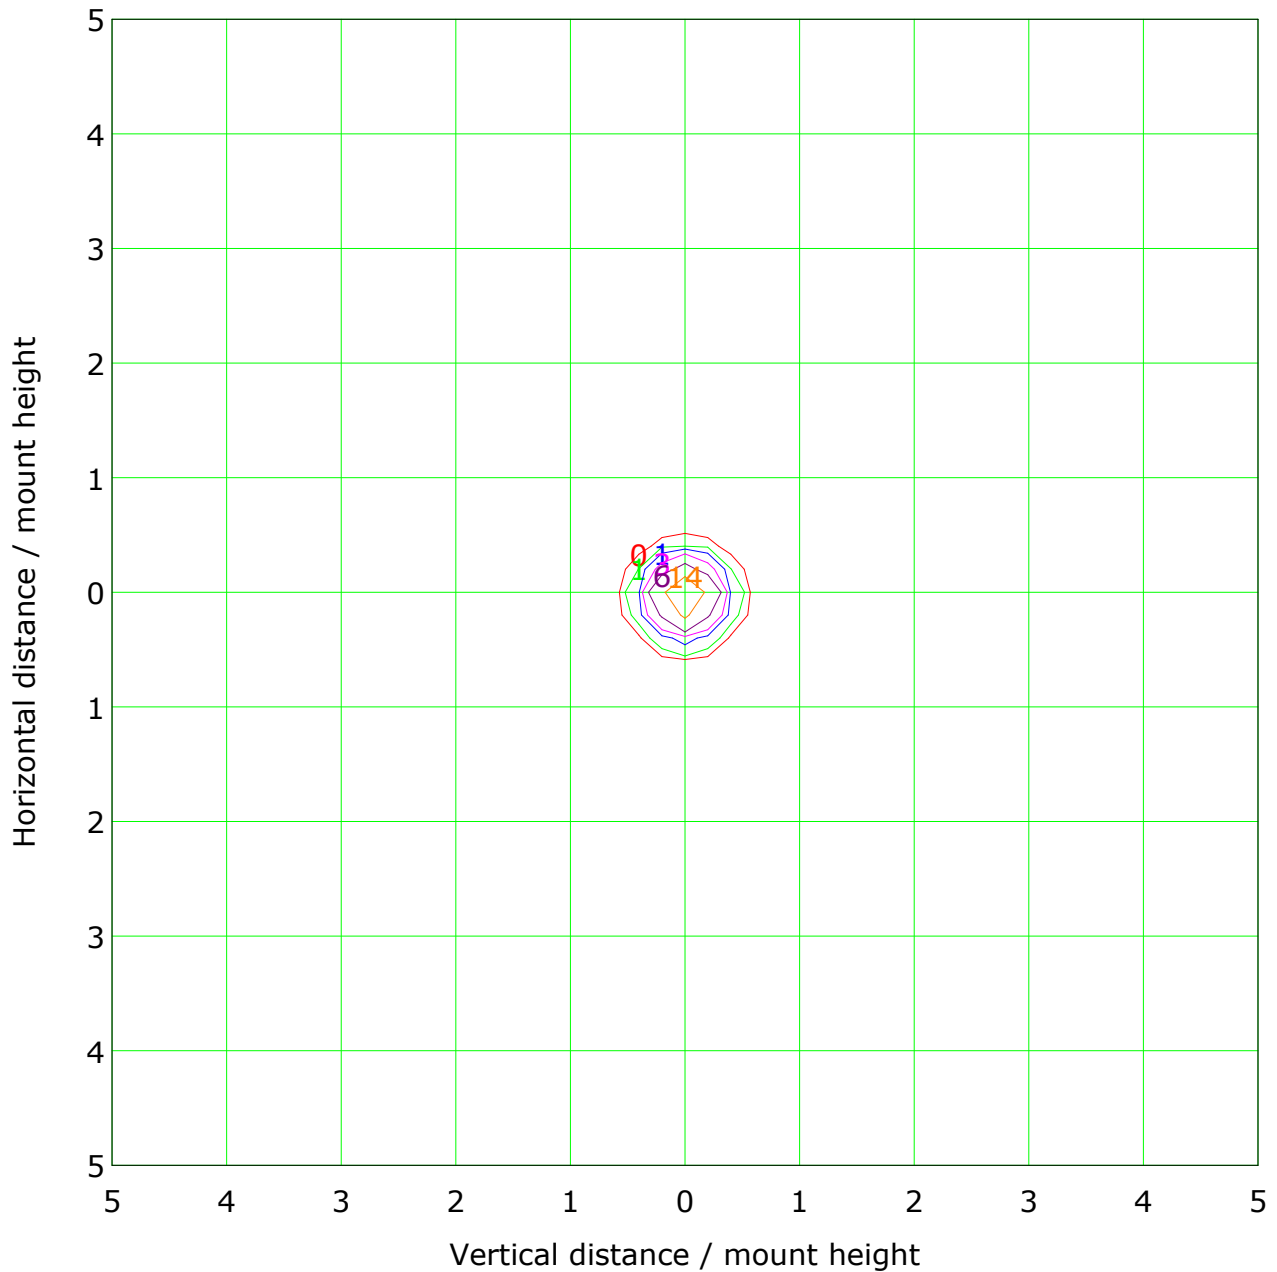


Mounting Height: 10m		Max Lux(100%): 29 lx	
( 1%):	0 lx	( 2%):	1 lx
( 5%):	1 lx	( 10%):	3 lx
( 20%):	6 lx	( 50%):	14 lx
(100%):	29 lx		


C Plane (°):0.0-180.0: 180.0  
Test Lab:  
Test Type: TYPE C  
Temperature:  
Operator:

Gamma Plane (°):0.0-90.0:5.0  
Test Device: CHL-6E  
Distance: 3.000 m  
Humidity:  
Inspector:

## Illuminance at a Distance

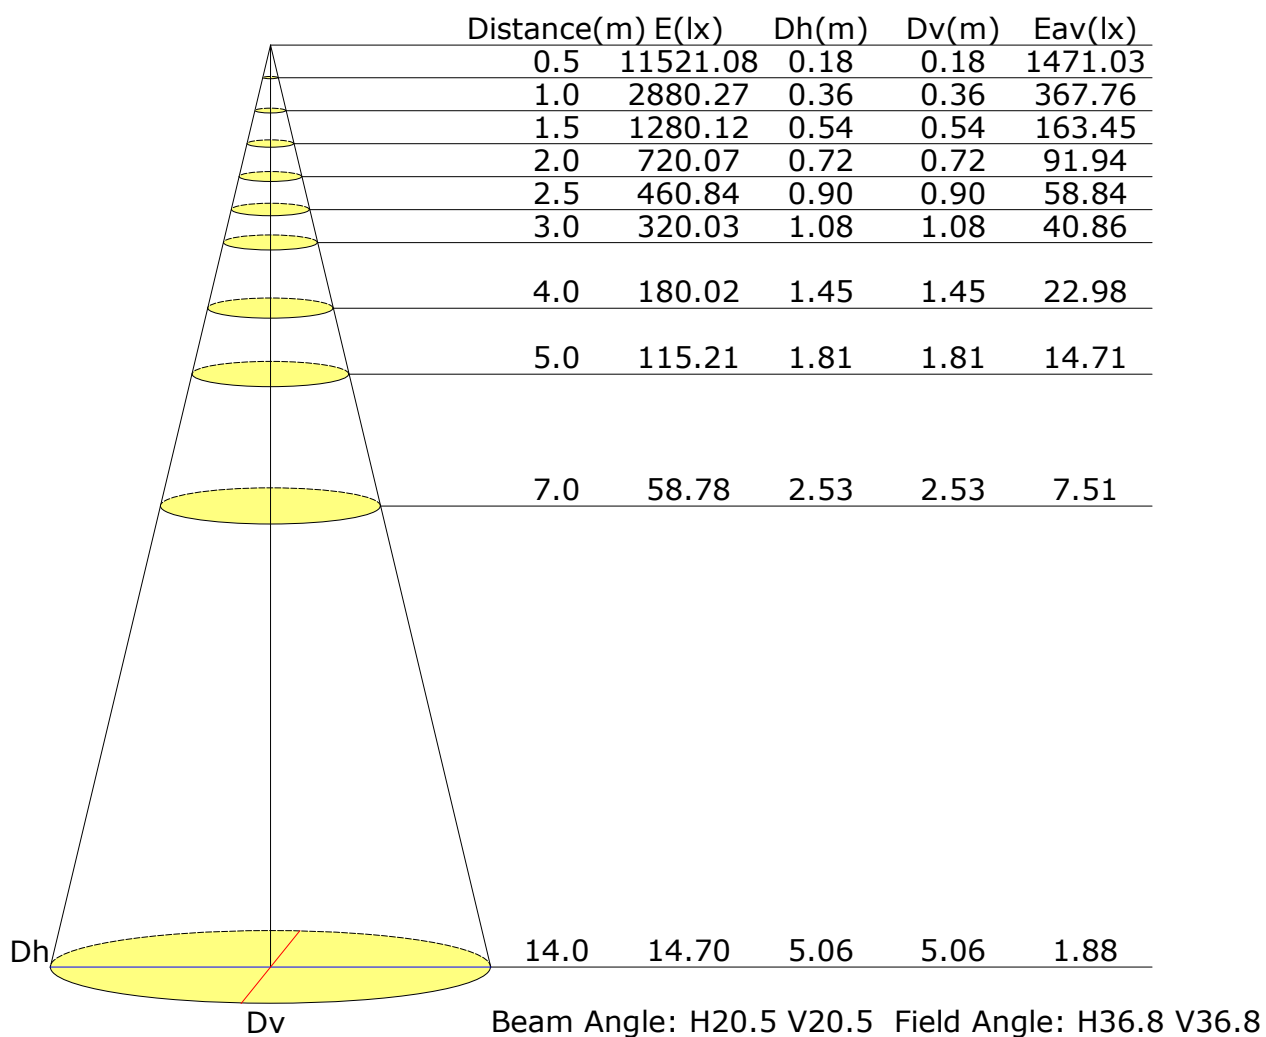

## Vertical IsoLux Plot

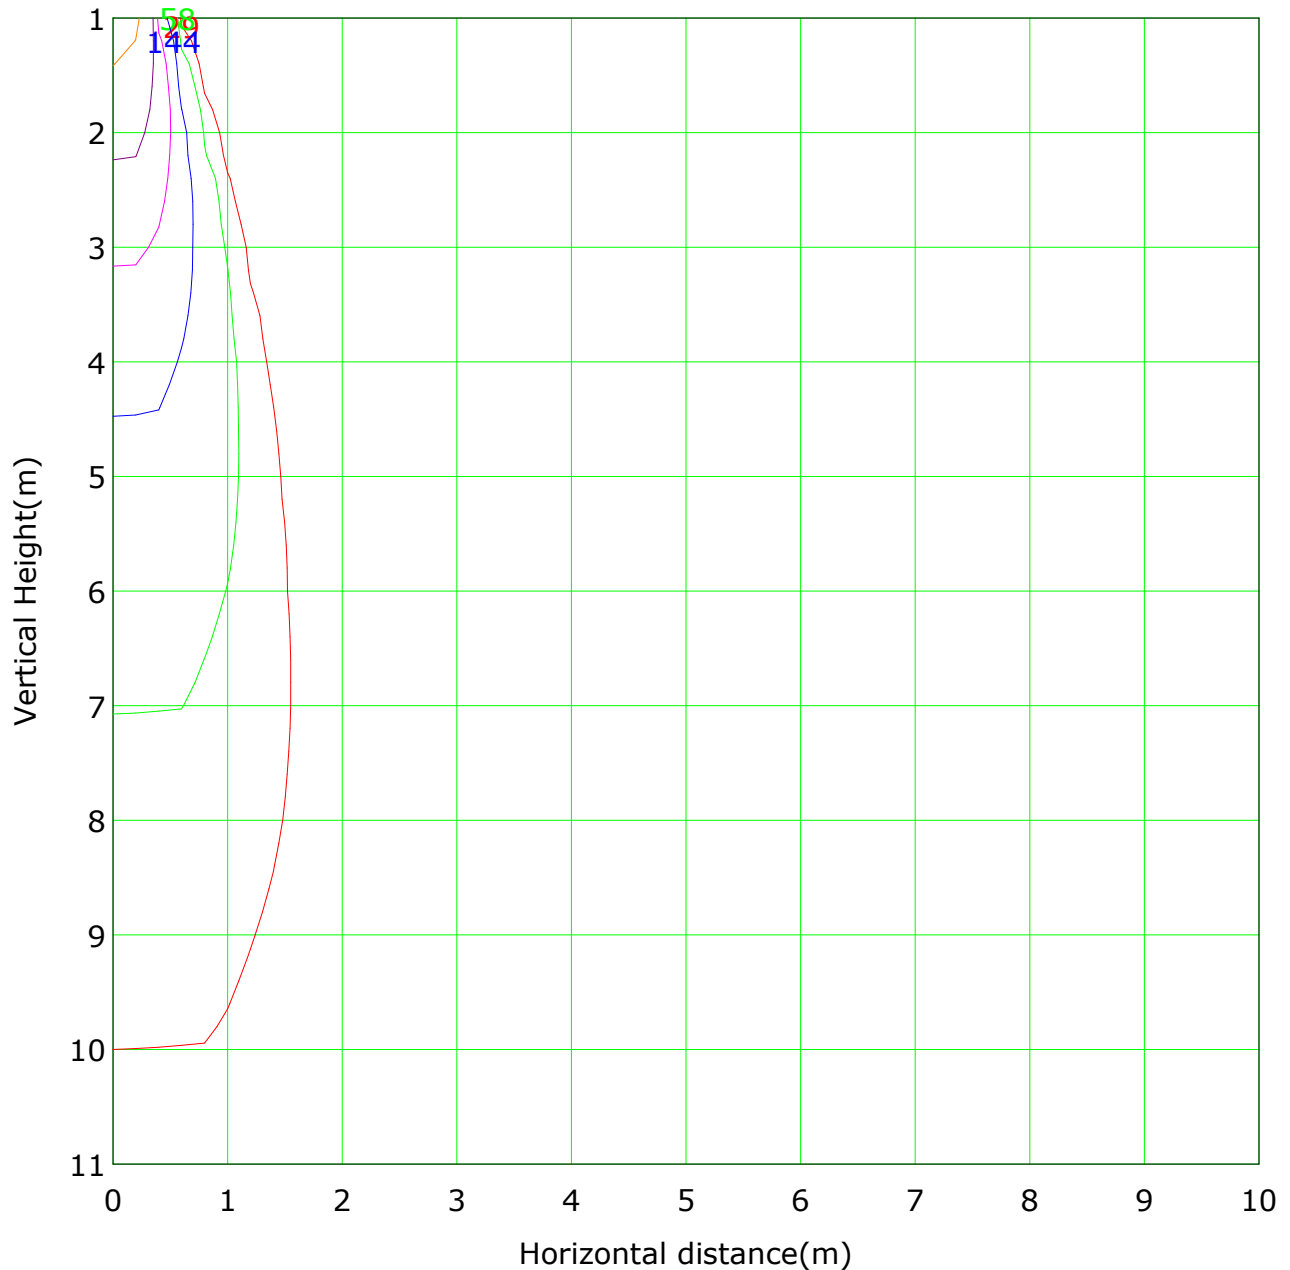


Lowest(m): 1m    Highest(m): 11    Max Lux: 2880

( 1%): 29 lx	( 2%): 58 lx
( 5%): 144 lx	( 10%): 288 lx
( 20%): 576 lx	( 50%): 1440 lx
(100%): 2880 lx	

C Plane (°):0.0-180.0: 180.0  
Test Lab:  
Test Type: TYPE C  
Temperature:  
Operator:

Gamma Plane (°):0.0-90.0:5.0  
Test Device: CHL-6E  
Distance: 3.000 m  
Humidity:  
Inspector:

## The average illuminance effective figure

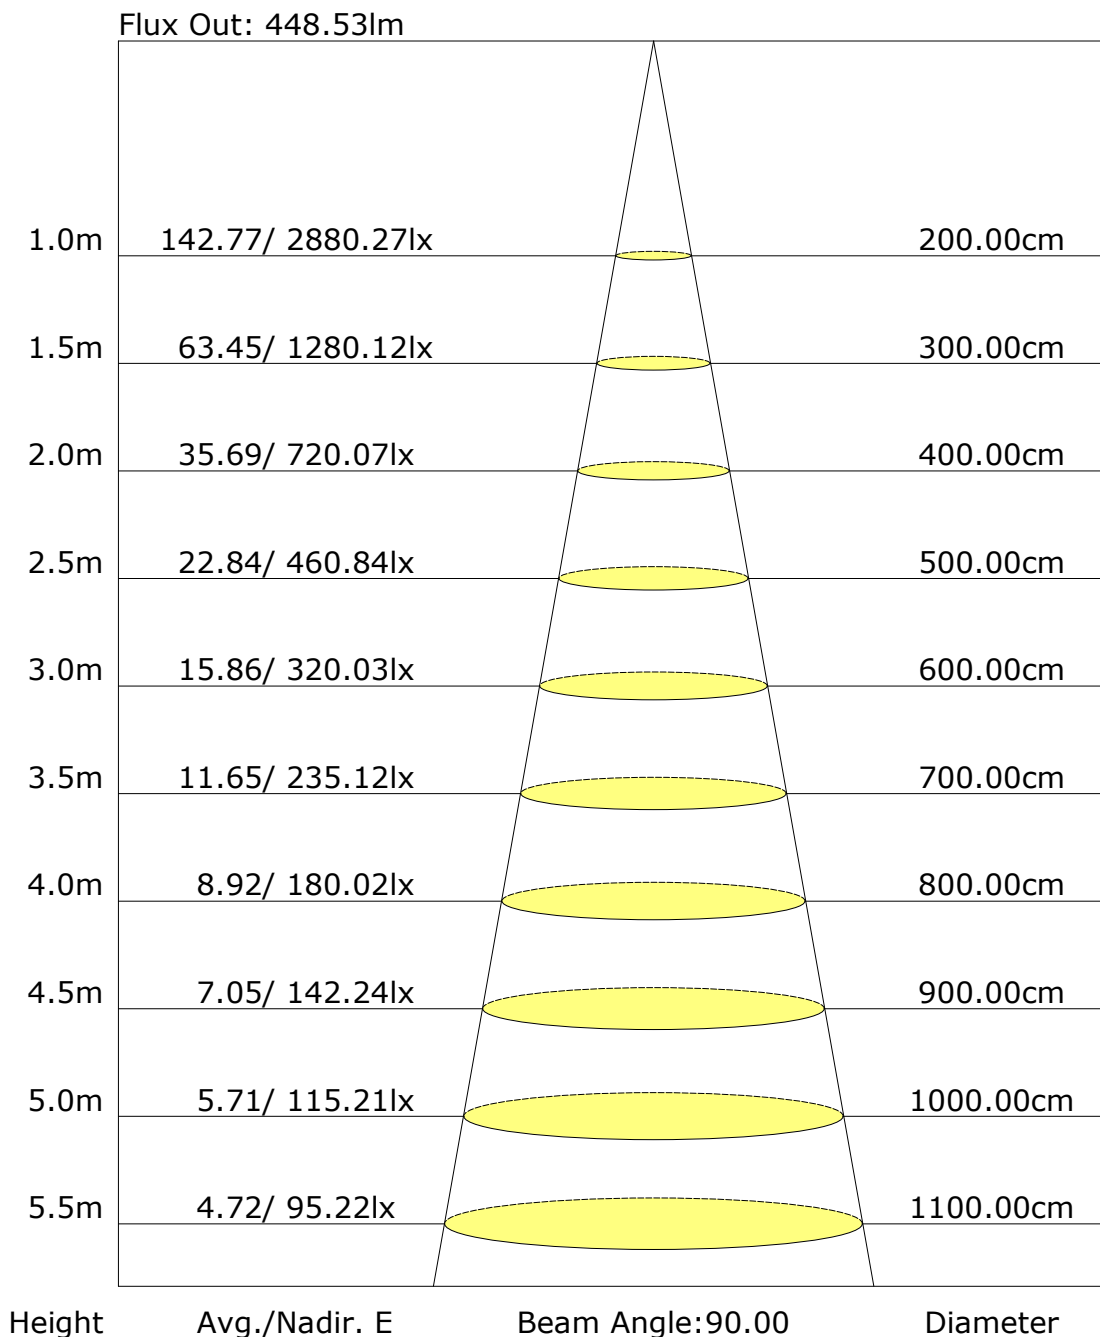

C Plane (°): 0.0-180.0: 180.0  
Test Lab:  
Test Type: TYPE C  
Temperature:  
Operator:

Gamma Plane (°): 0.0-90.0: 5.0  
Test Device: CHL-6E  
Distance: 3.000 m  
Humidity:  
Inspector:

## Zonal Lumen

[illegible]

Inspector:

## Candlepower Table

Unit: cd

[illegible]

C Plane (°):0.0-180.0: 180.0

Test Lab:

Test Type: TYPE C

Temperature:

Operator:

Gamma Plane (°):0.0-90.0:5.0

Test Device: CHL-6E

Distance: 3.000 m

Humidity:

Inspector: