

Report No.:

Test Time: 2023-07-03 17:32

Luminaire Property

Luminaire Category: Citizen 1202 3000K CRI90

Luminaire Description: 93.08411 50D

Voltage: 221.4 V

Current: 0.056 A

Power: 11.10 W

Power Factor: 0.899

Photometric Results

CIE Class: Direct

Measurement Flux: 767.1 lm

Downward Ratio: 100%

Horizontal Diffuse Angle(50%): H53.9

Vertical Diffuse Angle(50%): V53.9

Luminaire Efficacy Rating (LER): 69

Max. Intensity: 972.5 cd

Total Rated Lamp Lumens: 767.1 lm


Efficiency: 100%

Upward Ratio: 0%


Central Intensity: 972.5 cd

Pos of Max. Intensity: H0 V0

Picture Of Luminaire



Luminous Intensity Distribution Curve

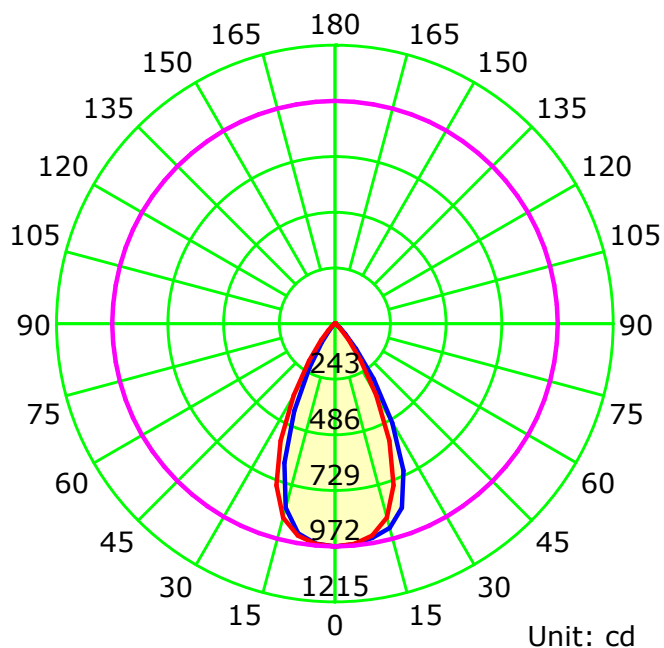

— C0-C180 — C90-C270 — G0

C Plane (°):0.0-180.0: 180.0

Test Lab:

Test Type: TYPE C

Temperature:

Operator:

Gamma Plane (°):0.0-90.0:5.0



Test Device: CHL-6E

Distance: 3.000 m

Humidity:

Inspector:


Luminous Intensity Distribution Curve

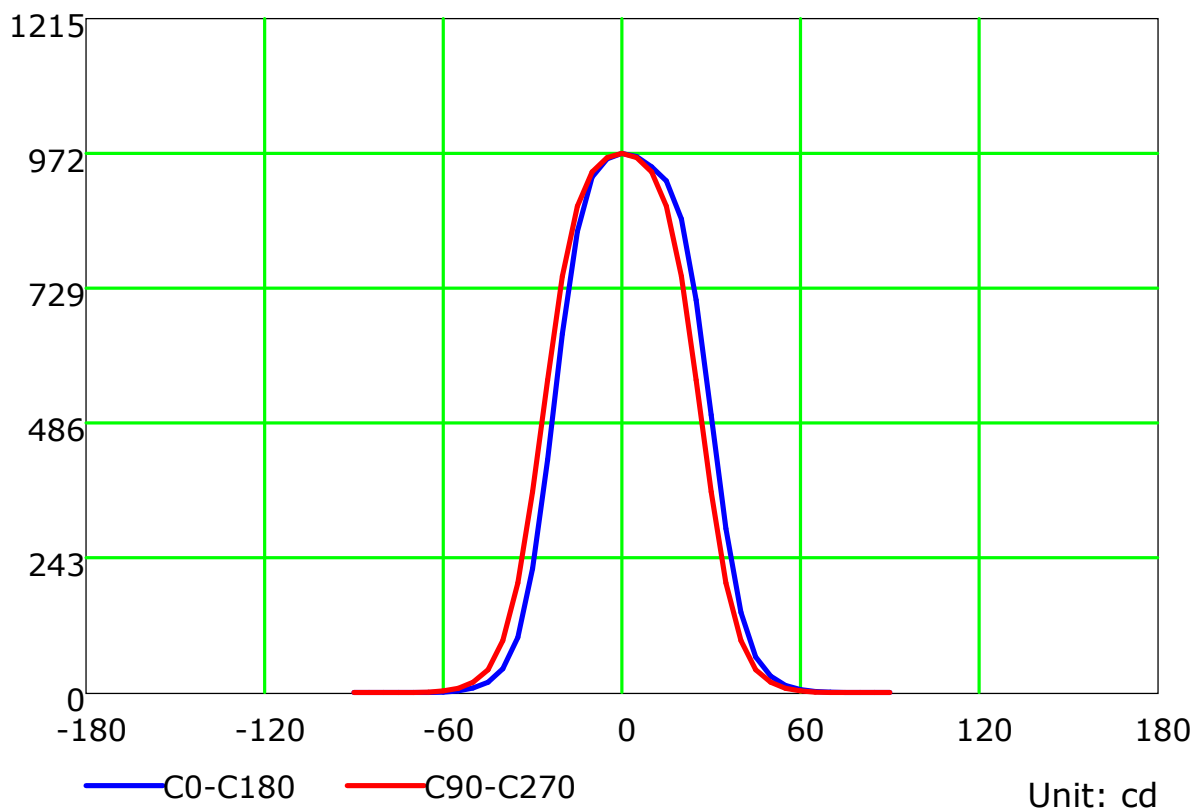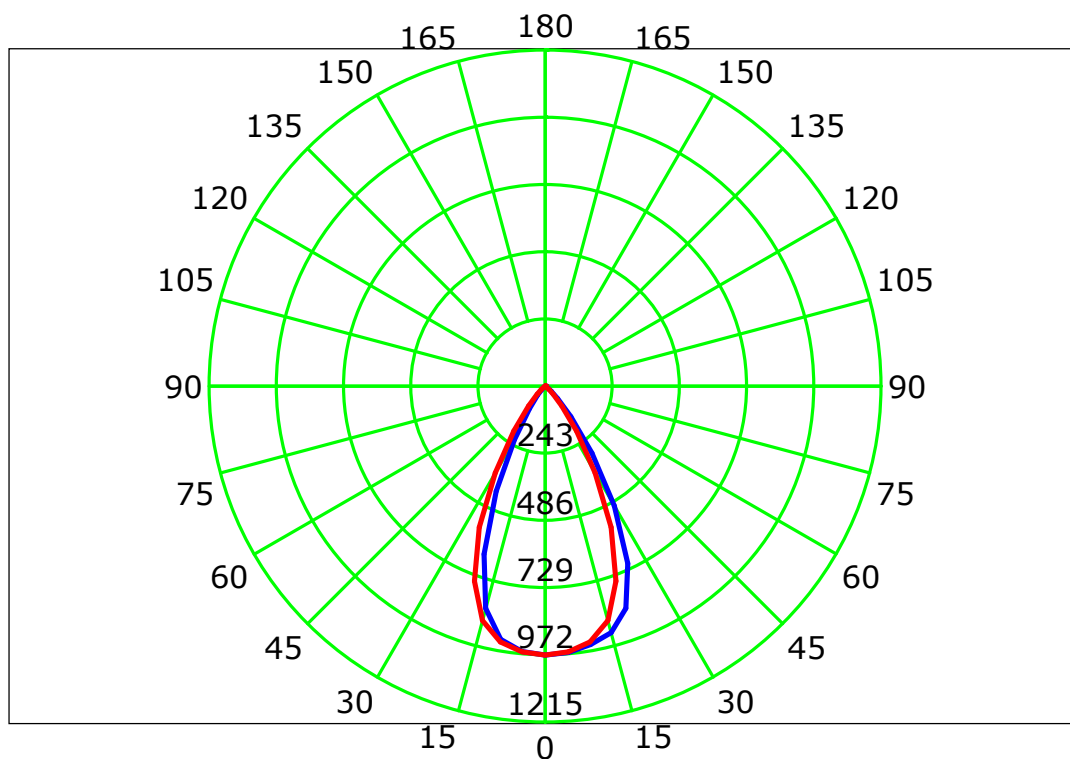

C Plane (°):0.0-180.0: 180.0
Test Lab:
Test Type: TYPE C
Temperature:
Operator:

Gamma Plane (°):0.0-90.0:5.0
Test Device: CHL-6E
Distance: 3.000 m
Humidity:
Inspector:

Isocandela (rectangle)

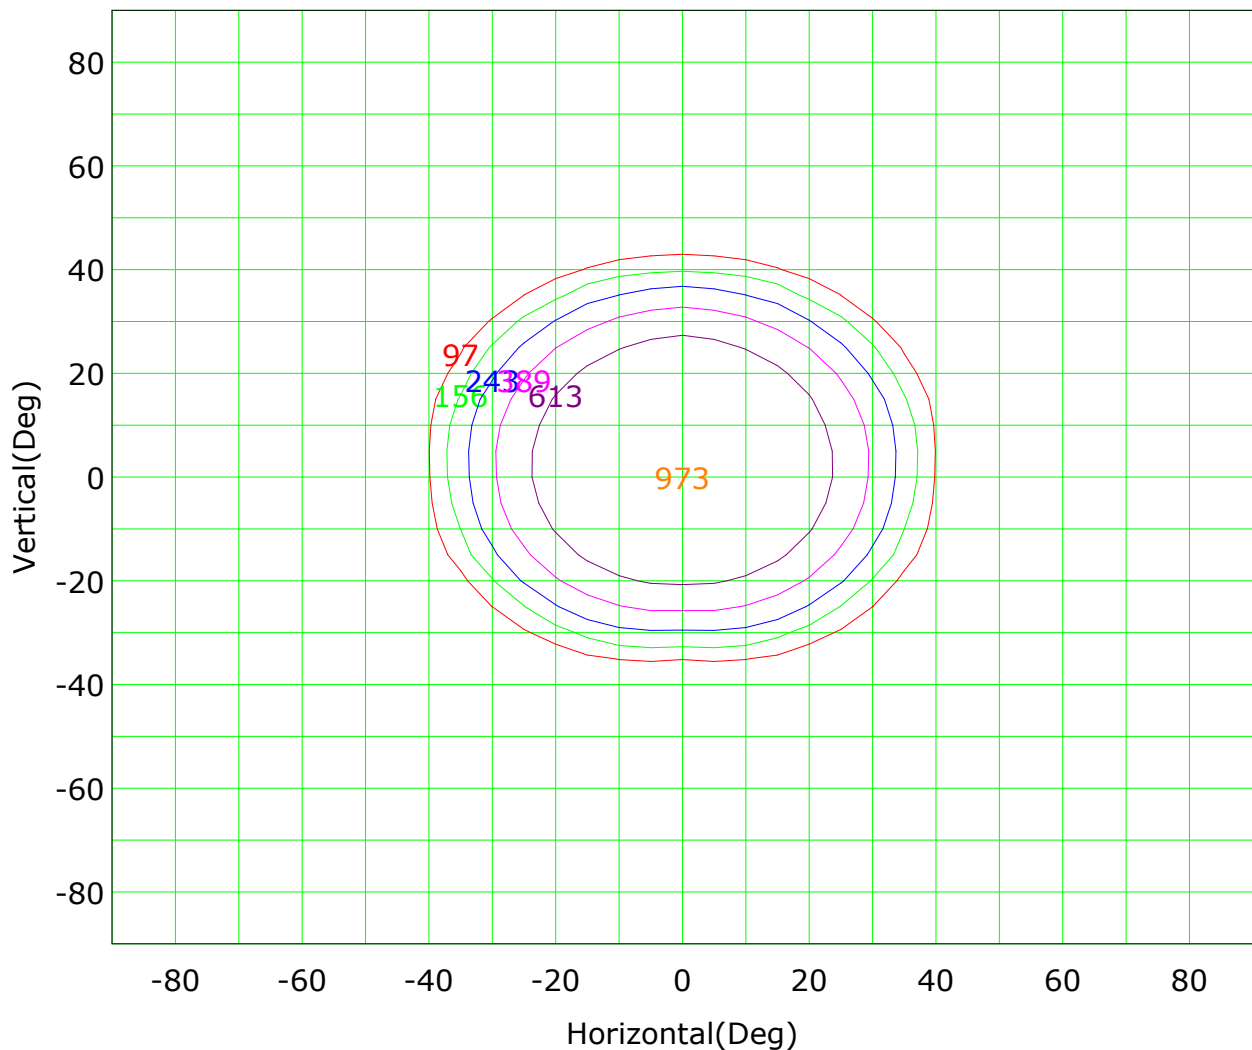

Imax (100%): 973 cd

(10%):	97 cd	(16%):	156 cd
(25%):	243 cd	(40%):	389 cd
(63%):	613 cd	(100%):	973 cd

C Plane (°):0.0-180.0: 180.0

Test Lab:

Test Type: TYPE C

Temperature:

Operator:

Gamma Plane (°):0.0-90.0:5.0


Test Device: CHL-6E

Distance: 3.000 m

Humidity:

Inspector:

IsoLux Plot

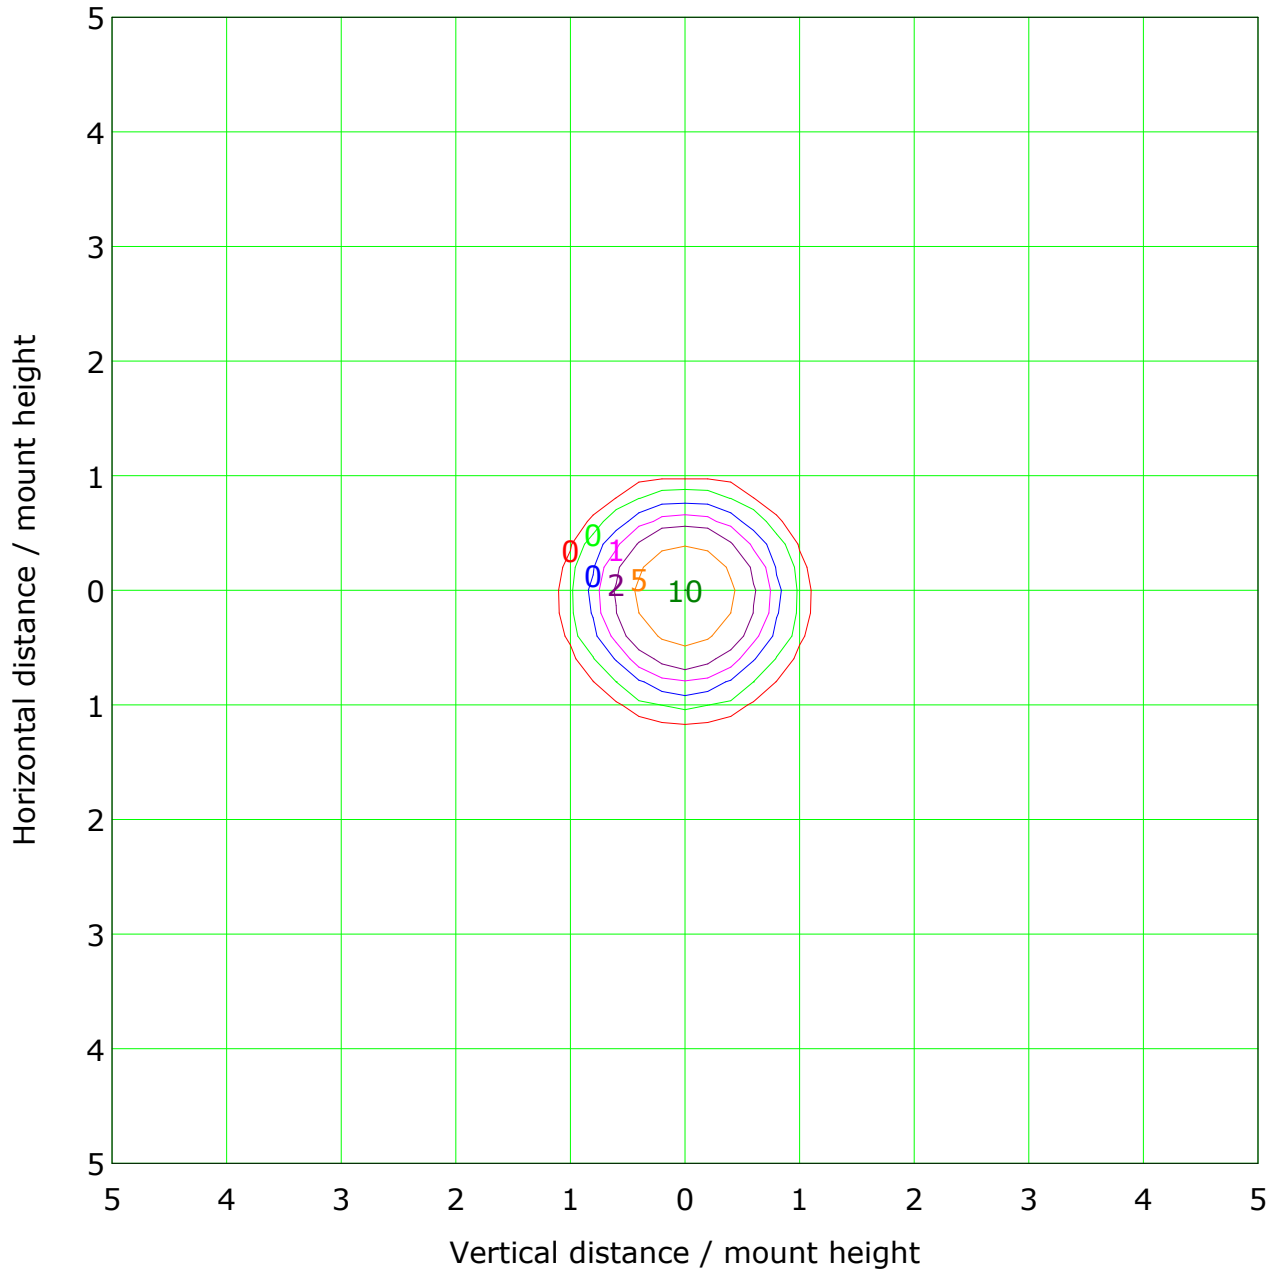

Mounting Height: 10m Max Lux(100%): 10 lx			
— (1%):	0 lx	— (2%):	0 lx
— (5%):	0 lx	— (10%):	1 lx
— (20%):	2 lx	— (50%):	5 lx
— (100%):	10 lx		

C Plane (°):0.0-180.0: 180.0

Test Lab:

Test Type: TYPE C

Temperature:

Operator:

Gamma Plane (°):0.0-90.0:5.0


Test Device: CHL-6E

Distance: 3.000 m

Humidity:

Inspector:

Illuminance at a Distance

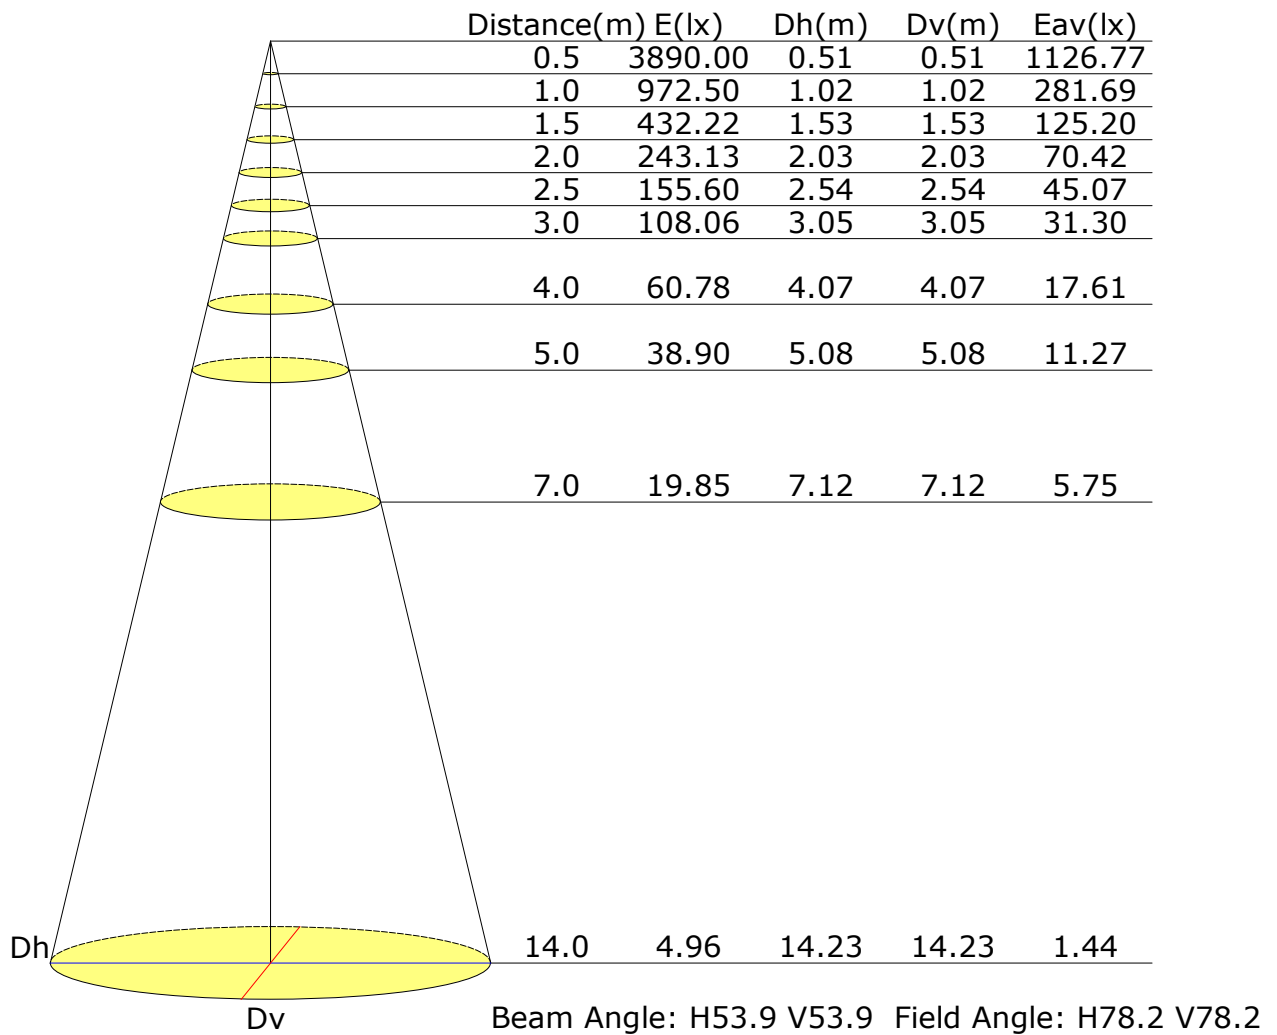

C Plane (°):0.0-180.0: 180.0

Test Lab:

Test Type: TYPE C

Temperature:

Operator:

Gamma Plane (°):0.0-90.0:5.0


Test Device: CHL-6E

Distance: 3.000 m

Humidity:

Inspector:

Vertical IsoLux Plot

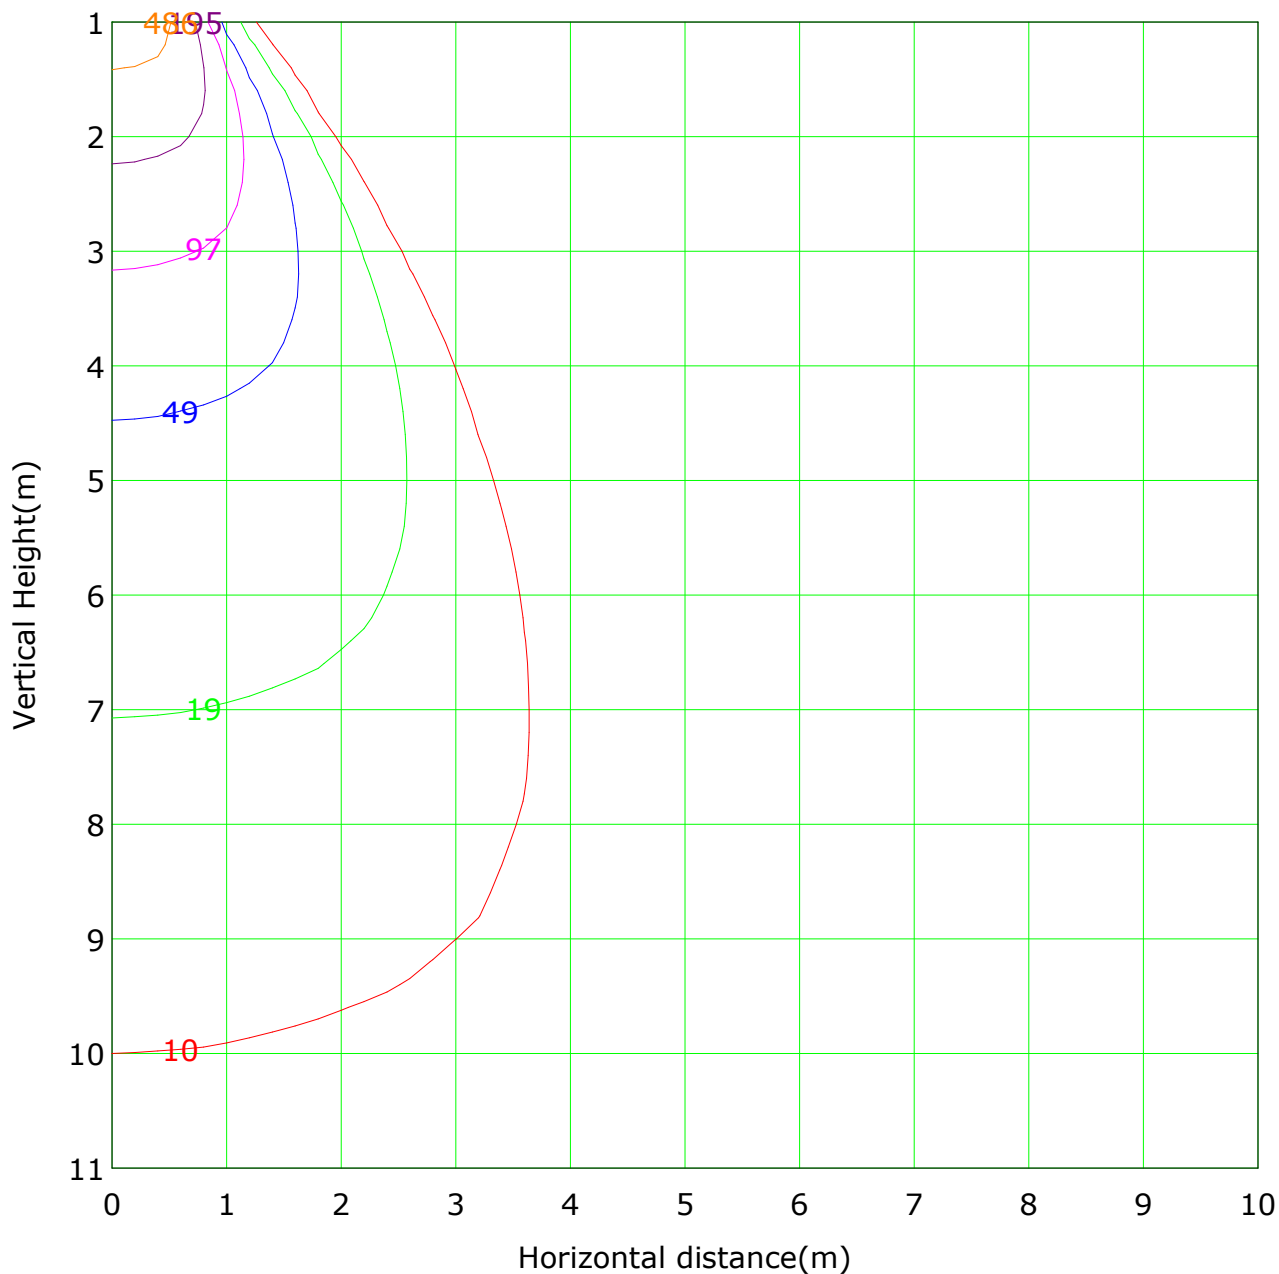


Lowest(m): 1m Highest(m): 11 Max Lux: 973

(1%): 10 lx	(2%): 19 lx
(5%): 49 lx	(10%): 97 lx
(20%): 195 lx	(50%): 486 lx
(100%): 973 lx	

C Plane (°):0.0-180.0: 180.0
Test Lab:
Test Type: TYPE C
Temperature:
Operator:

Gamma Plane (°):0.0-90.0:5.0
Test Device: CHL-6E
Distance: 3.000 m
Humidity:
Inspector:

The average illuminance effective figure

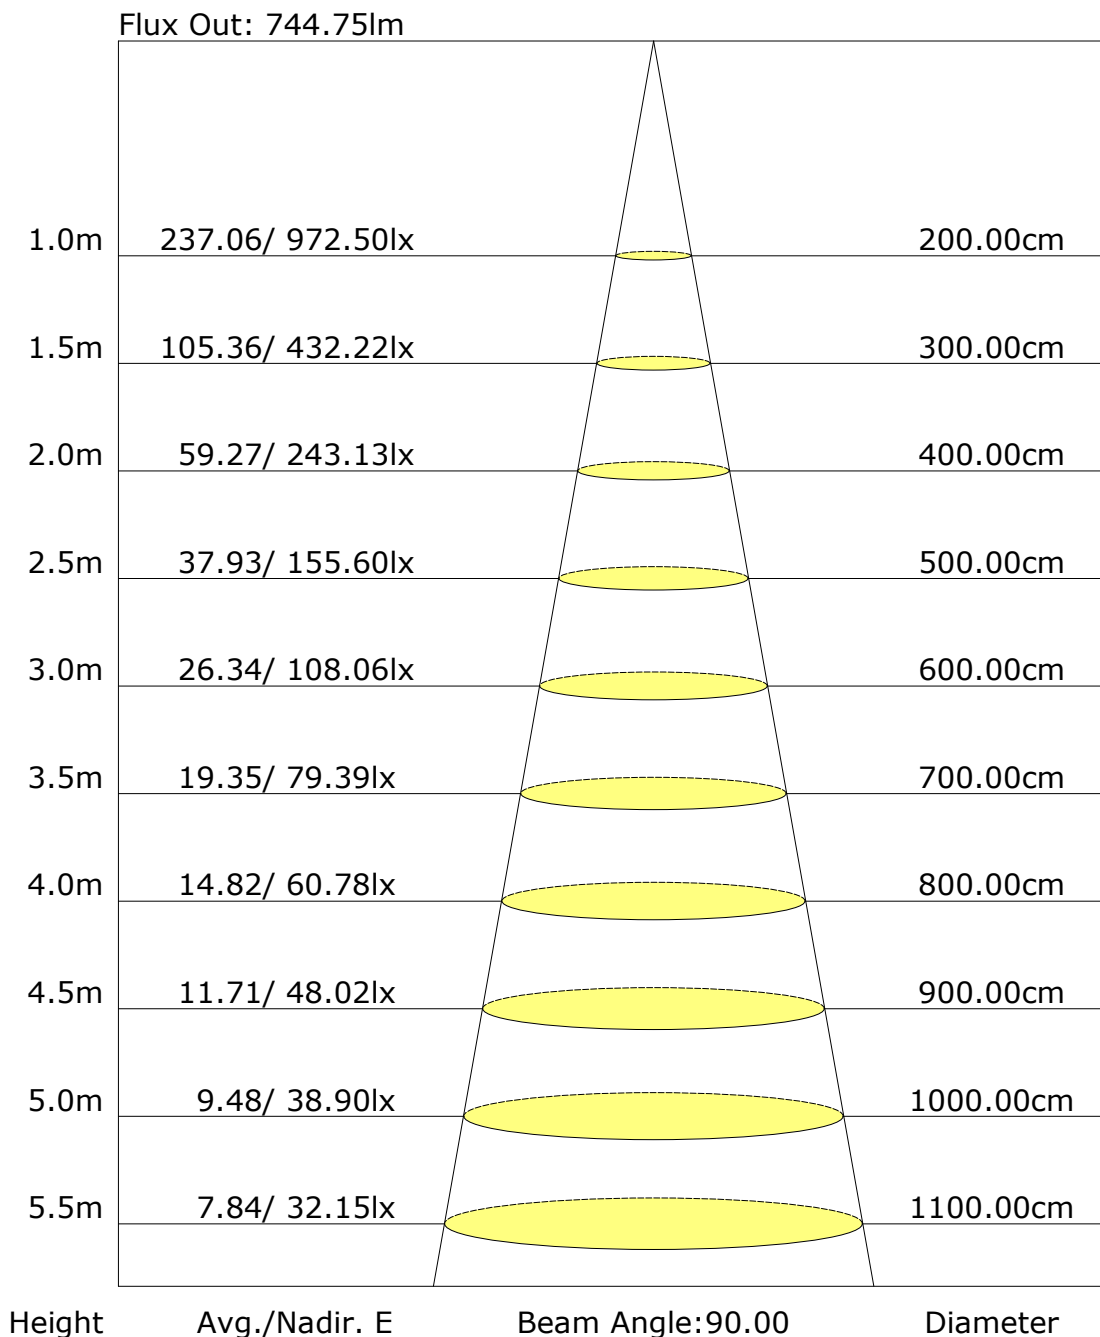

C Plane (°): 0.0-180.0: 180.0
Test Lab:
Test Type: TYPE C
Temperature:
Operator:

Gamma Plane (°): 0.0-90.0: 5.0
Test Device: CHL-6E
Distance: 3.000 m
Humidity:
Inspector:

Zonal Lumen

[illegible]

Inspector:

Candlepower Table

Unit: cd

[illegible]

C Plane (°):0.0-180.0: 180.0

Test Lab:

Test Type: TYPE C

Temperature:

Operator:

Gamma Plane (°):0.0-90.0:5.0

Test Device: CHL-6E

Distance: 3.000 m

Humidity:

Inspector: