

Report No.:93.04512 FOS Surface Mounted Test Time: 2023-06-30 19:30

Luminaire Property

Luminaire Category: Citizen 1202 3000K CRI90

Luminaire Description: 15D

Voltage: 217.4 V

Power: 9.70 W

Lamp Description:

Current: 0.117 A

Power Factor: 0.375

Photometric Results

CIE Class: Direct

Measurement Flux: 472.2 lm

Downward Ratio: 100%

Horizontal Diffuse Angle(50%): H18.5

Vertical Diffuse Angle(50%): V18.5

Luminaire Efficacy Rating (LER): 49

Max. Intensity: 2904.34 cd

Total Rated Lamp Lumens: 472.2 lm


Efficiency: 100%

Upward Ratio: 0%


Central Intensity: 2904.33 cd

Pos of Max. Intensity: H0 V0

Picture Of Luminaire



Luminous Intensity Distribution Curve

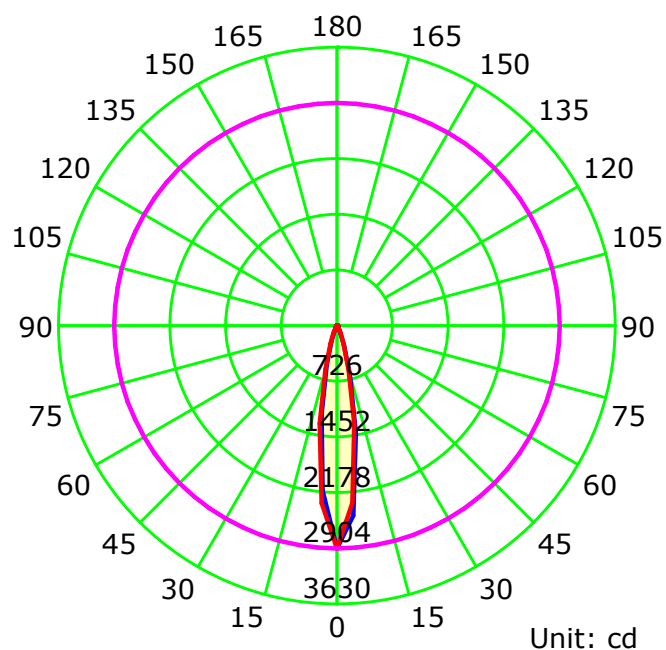

— C0-C180 — C90-C270 — G0

C Plane (°):0.0-180.0: 180.0

Test Lab:

Test Type: TYPE C

Temperature:

Operator:

Gamma Plane (°):0.0-90.0:5.0


Test Device: CHL-6E

Distance: 3.000 m

Humidity:

Inspector:


Luminous Intensity Distribution Curve

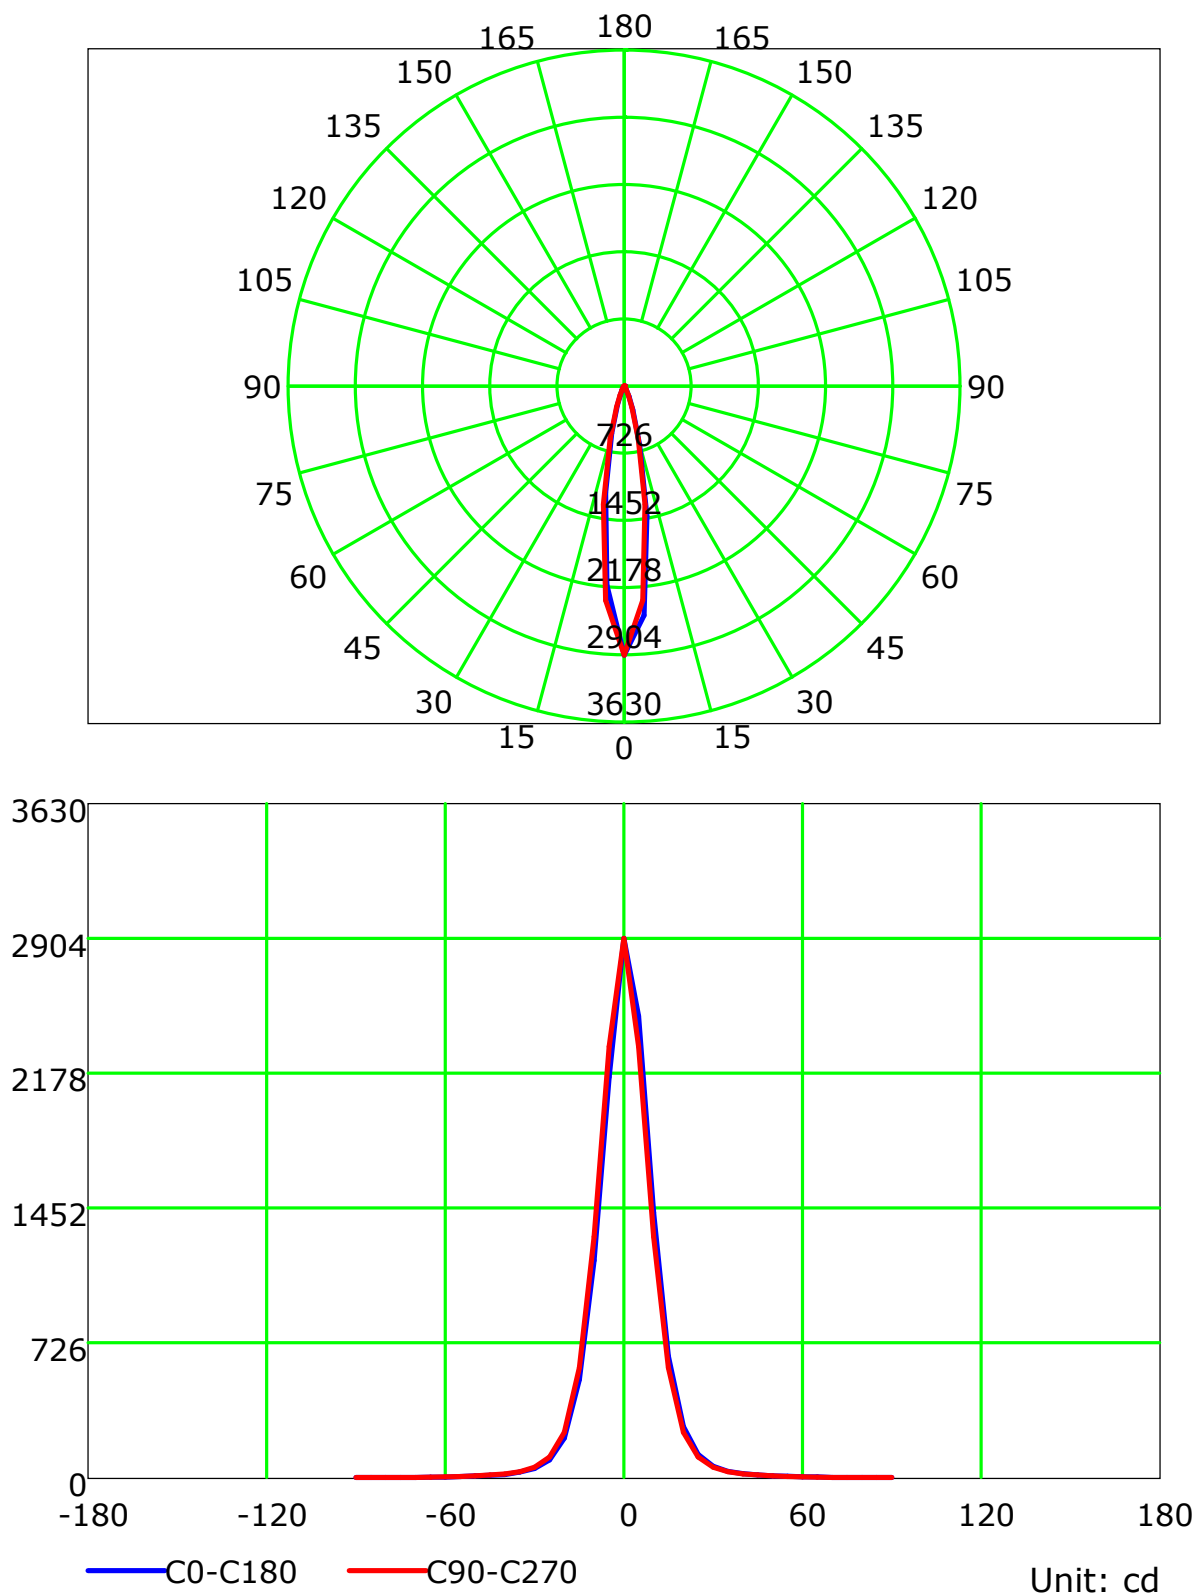

C Plane (°):0.0-180.0: 180.0
Test Lab:
Test Type: TYPE C
Temperature:
Operator:

Gamma Plane (°):0.0-90.0:5.0
Test Device: CHL-6E
Distance: 3.000 m
Humidity:
Inspector:

Isocandela (rectangle)

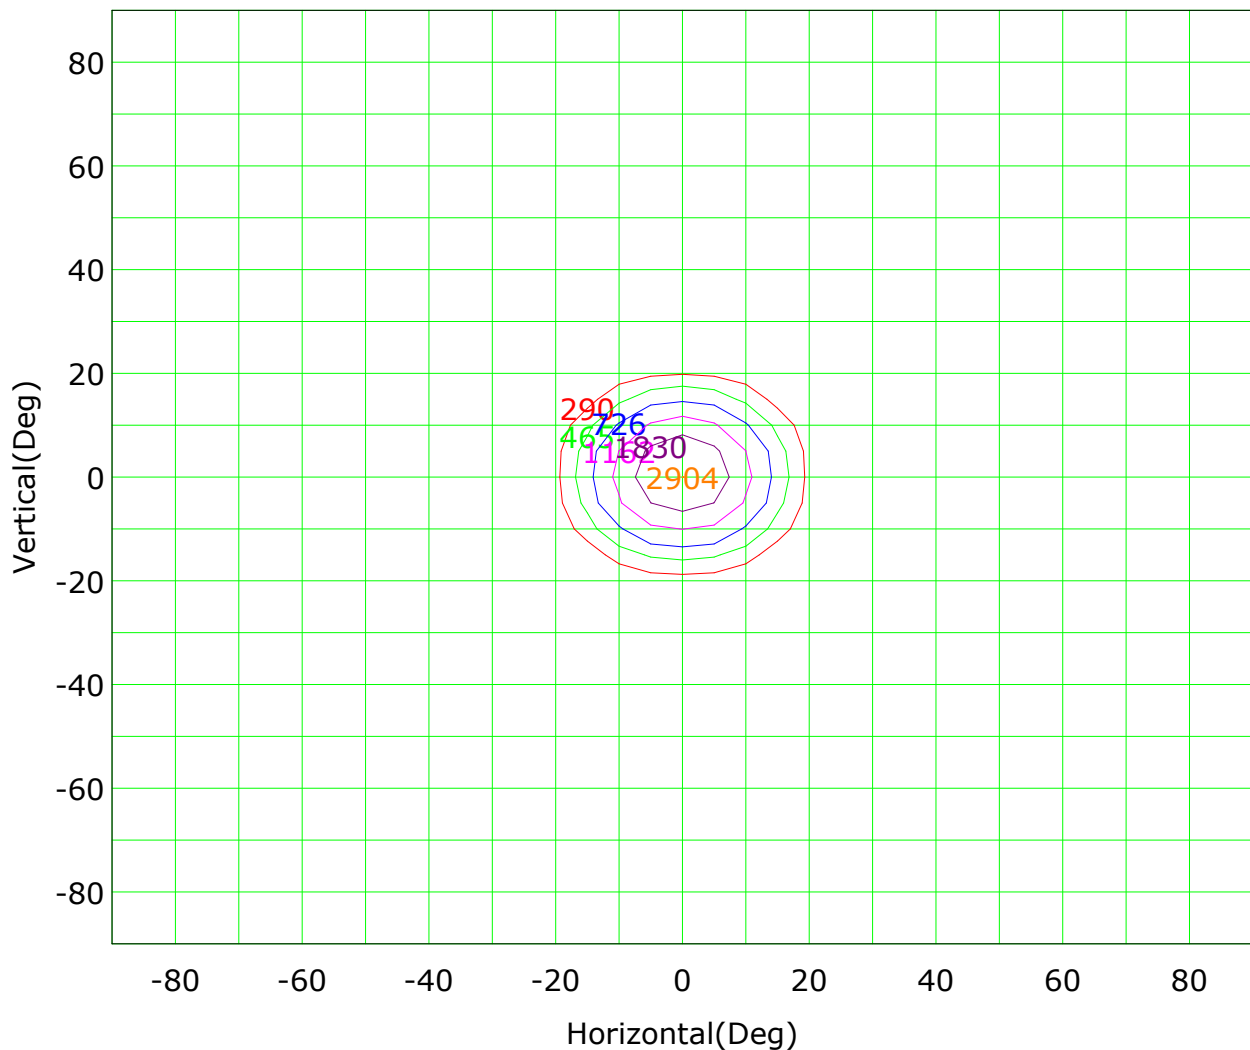

Imax (100%): 2904 cd

(10%): 290 cd	(16%): 465 cd
(25%): 726 cd	(40%): 1162 cd
(63%): 1830 cd	(100%): 2904 cd

C Plane (°):0.0-180.0: 180.0

Test Lab:

Test Type: TYPE C

Temperature:

Operator:

Gamma Plane (°):0.0-90.0:5.0


Test Device: CHL-6E

Distance: 3.000 m

Humidity:

Inspector:

IsoLux Plot

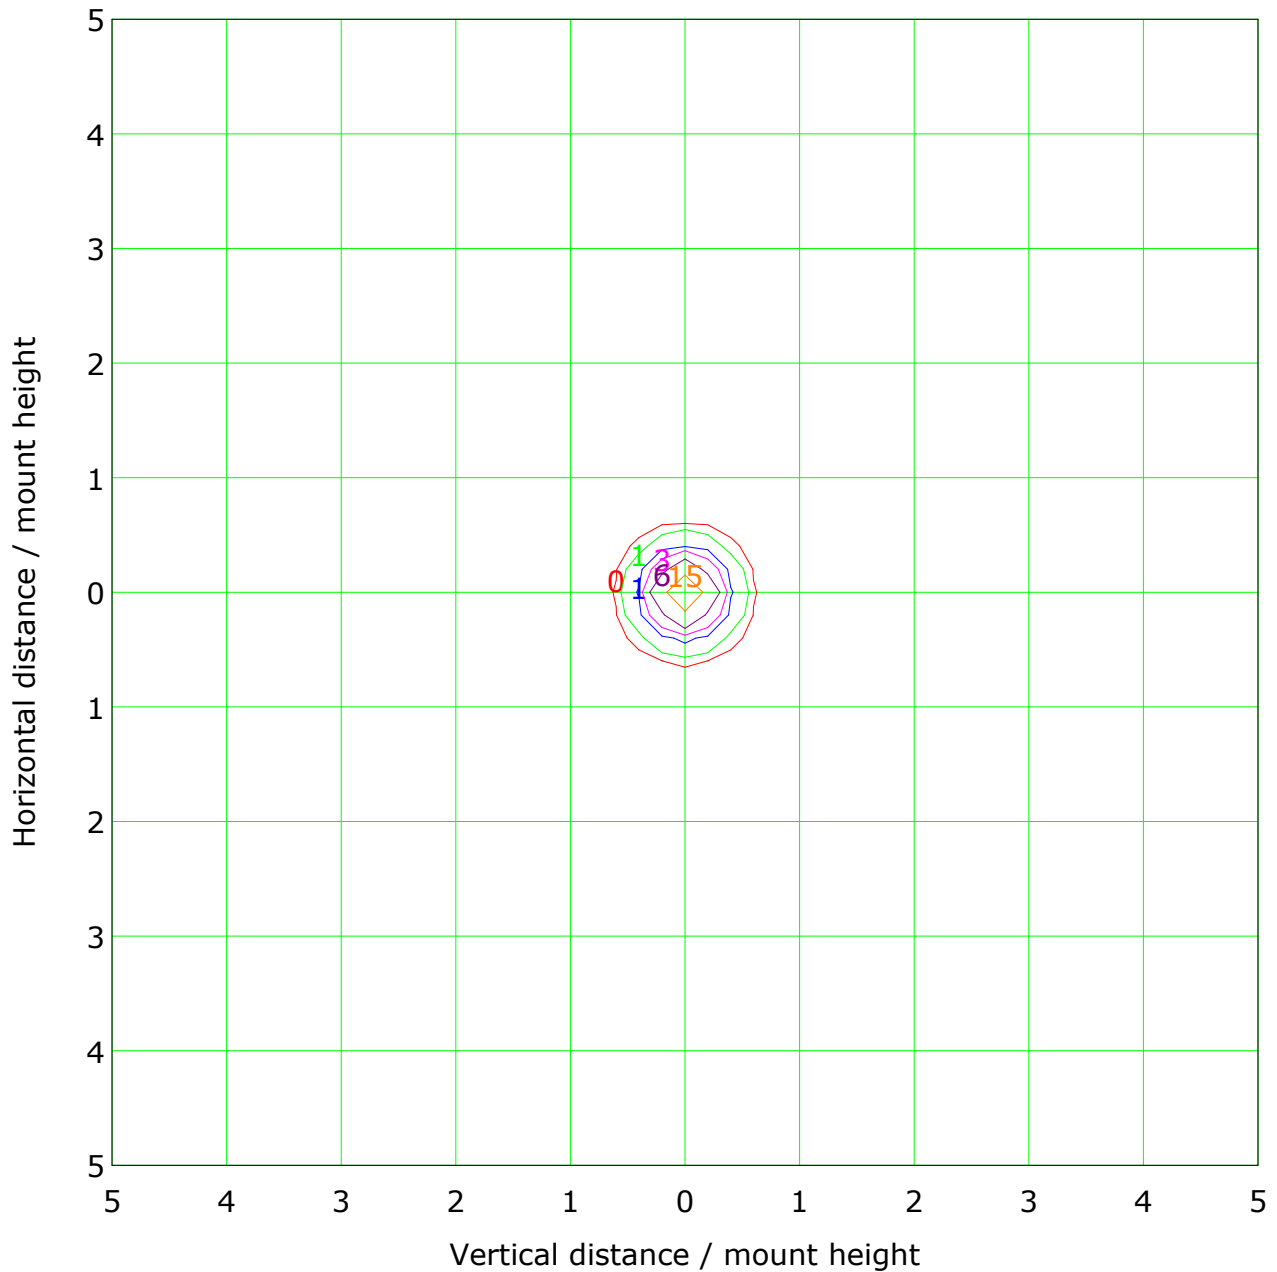

Mounting Height: 10m Max Lux(100%): 29 lx			
— (1%):	0 lx	— (2%):	1 lx
— (5%):	1 lx	— (10%):	3 lx
— (20%):	6 lx	— (50%):	15 lx
— (100%):	29 lx		

C Plane (°):0.0-180.0: 180.0

Test Lab:

Test Type: TYPE C

Temperature:

Operator:

Gamma Plane (°):0.0-90.0:5.0


Test Device: CHL-6E

Distance: 3.000 m


Humidity:

Inspector:

Illuminance at a Distance

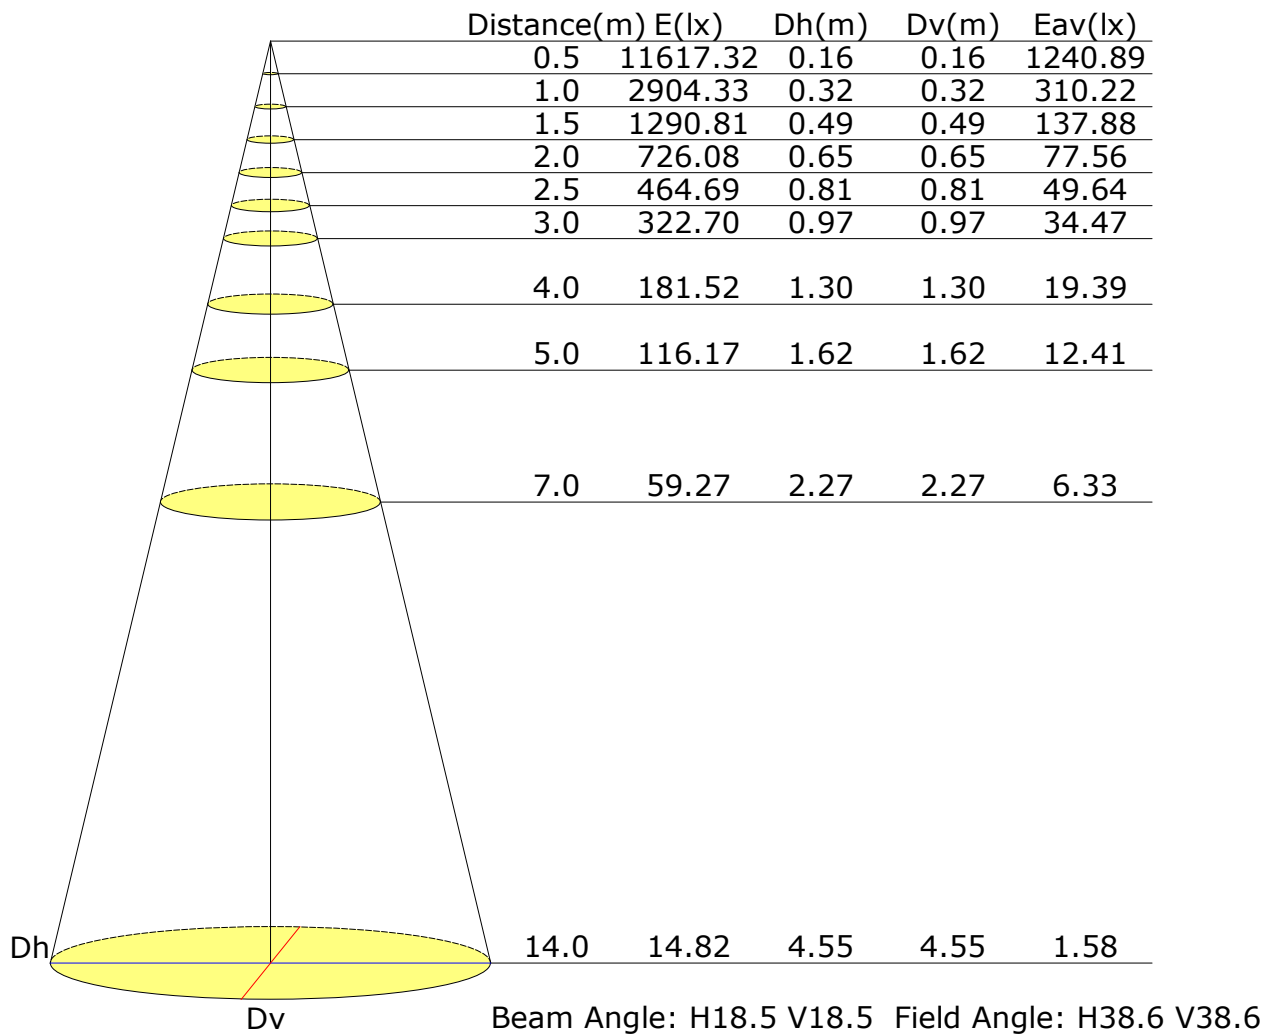

Vertical IsoLux Plot

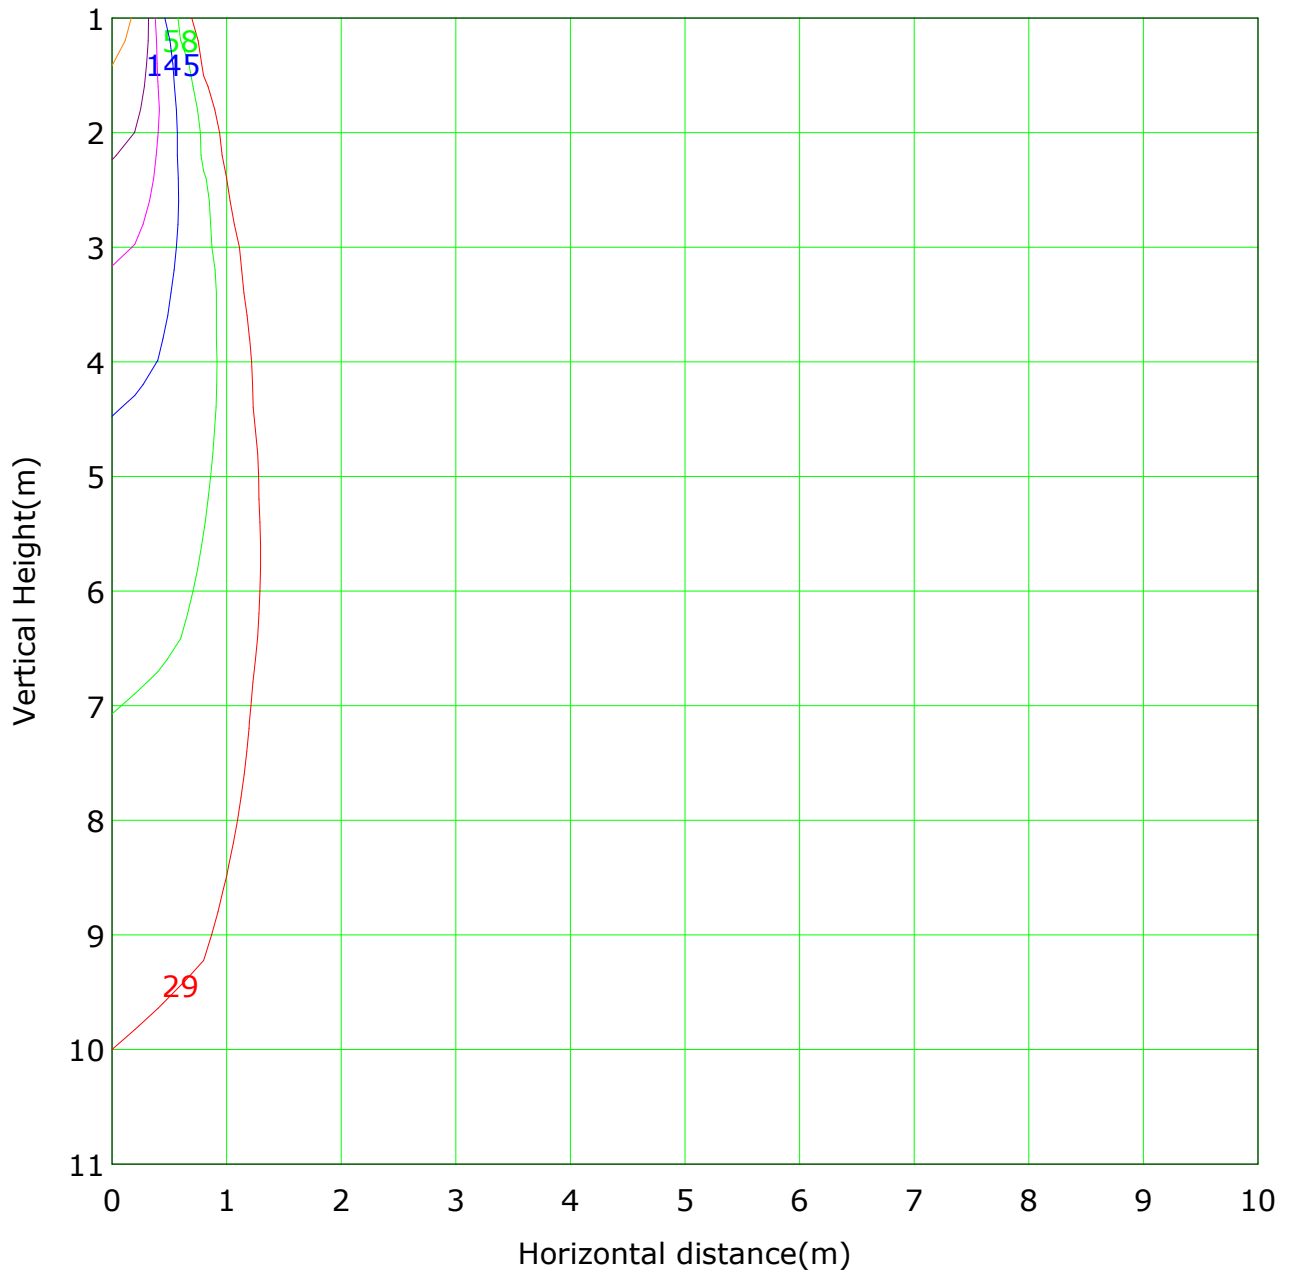


Lowest(m): 1m Highest(m): 11 Max Lux: 2904	
(1%): 29 lx	(2%): 58 lx
(5%): 145 lx	(10%): 290 lx
(20%): 581 lx	(50%): 1452 lx
(100%): 2904 lx	

C Plane (°):0.0-180.0: 180.0
Test Lab:
Test Type: TYPE C
Temperature:
Operator:

Gamma Plane (°):0.0-90.0:5.0
Test Device: CHL-6E
Distance: 3.000 m
Humidity:
Inspector:

The average illuminance effective figure

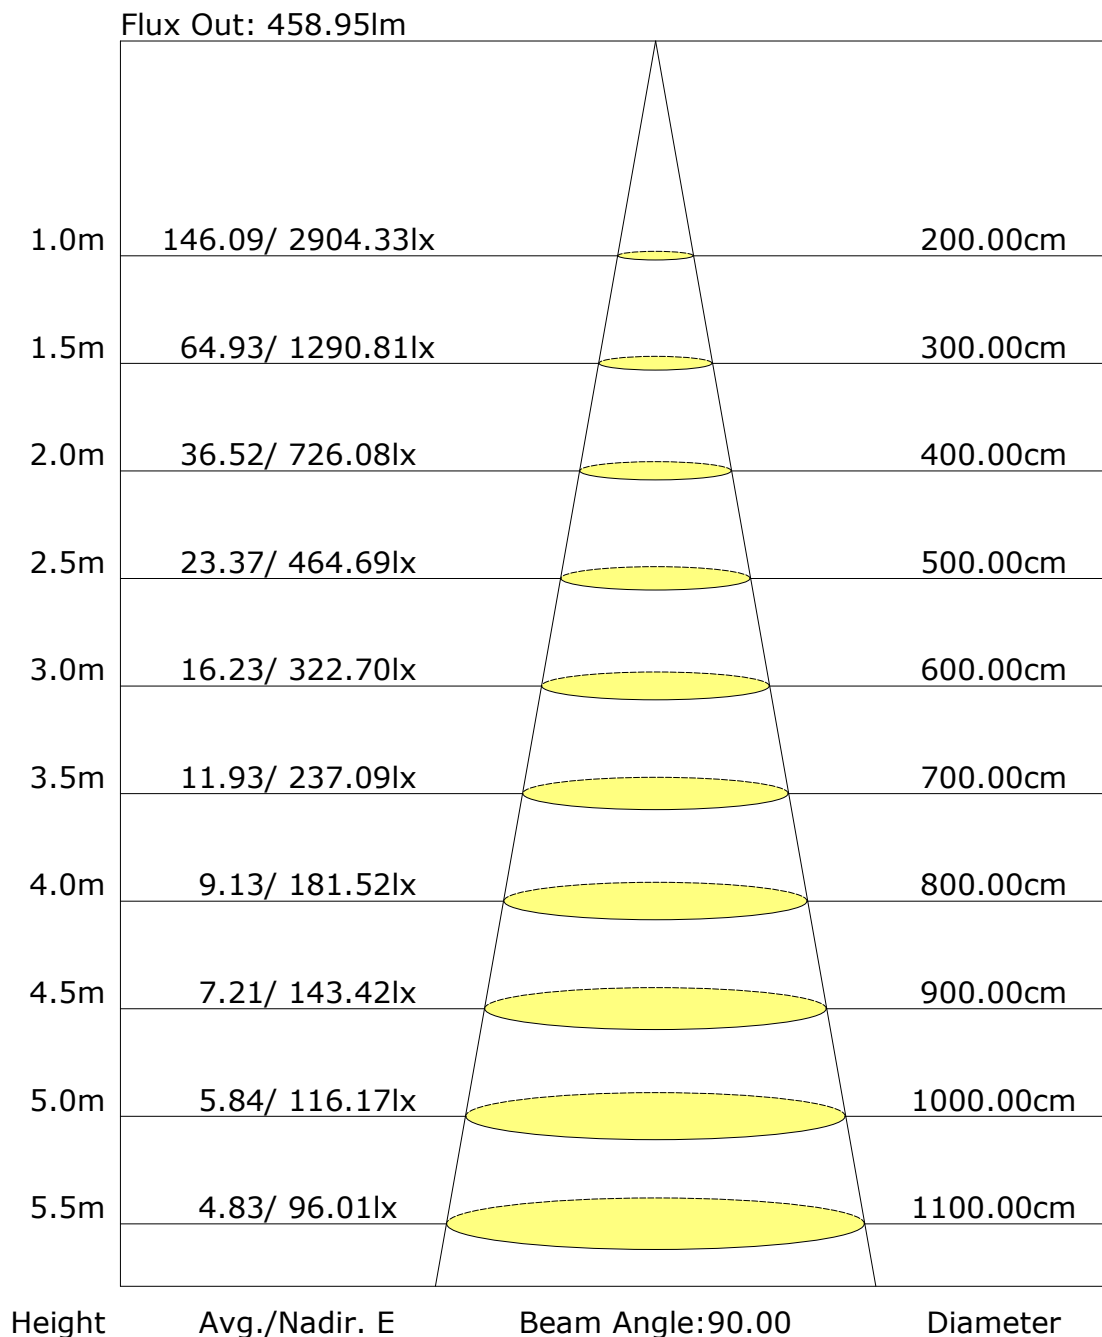

C Plane (°): 0.0-180.0: 180.0
Test Lab:
Test Type: TYPE C
Temperature:
Operator:

Gamma Plane (°): 0.0-90.0: 5.0
Test Device: CHL-6E
Distance: 3.000 m
Humidity:
Inspector:

Zonal Lumen

[illegible]

Inspector:

Candlepower Table

Unit: cd

[illegible]

C Plane (°):0.0-180.0: 180.0

Test Lab:

Test Type: TYPE C

Temperature:

Operator:

Gamma Plane (°):0.0-90.0:5.0

Test Device: CHL-6E

Distance: 3.000 m

Humidity:

Inspector: