

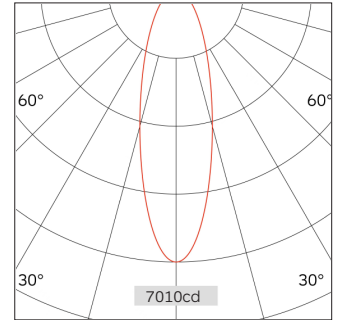


# 51.07511 SLIM Recessed Downlight

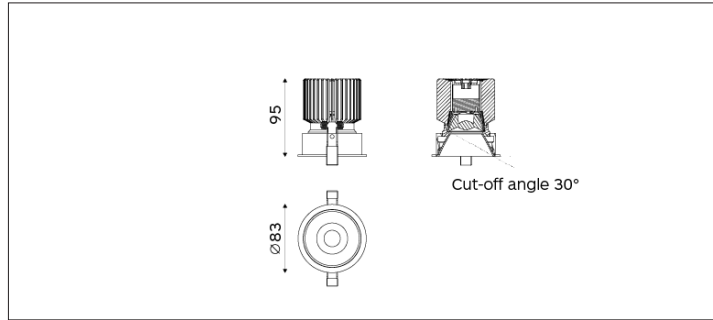

Light Distribution	SLIM Recessed Downlight
Colour Temperature	2700/3000/3500/4000K
Colour Rendition Index	CRI 90
Optics	LENS
Beam Angle	15D/25D/35D
Cut Out	75mm
Connected Load	20W
Luminous Flux Of The Luminaire	1411lm
Luminaire Efficacy	67m/W
Colour Deviation	SDCM <5
Light Source	LED
LED Type	COB
Dimming Method	Triac/1-10V/ Dali
Cover Material	Aluminum
Body Material	Aluminum
IP Rating	IP20
Housing Colour	Sandy White/ Sandy Black
Weight	0.5Kg
Technical Region	220-240V 50/60Hz

## Light Beam Table

h(m)	E(lx)	D(m)
		25°
1.0	6980	0.45
2.0	1745	0.91
3.0	776	1.36
4.0	436	1.81
5.0	279	2.27

Application areas: High end residential and retail projects, hotels, museums and galleries.