

Report No.: 32.04520 ARTAX Tracklight

Test Time: 2023-07-06 19:20

Luminaire Property

Luminaire Category: Citizen 1202 3000K CRI90

Luminaire Description: 19D

Current: 0.077 A

Power Factor: 0.541

Voltage: 217.7 V

Power: 9.10 W

Photometric Results

CIE Class: Direct

Measurement Flux: 263.4 lm

Downward Ratio: 100%

Horizontal Diffuse Angle(50%): H19.5

Vertical Diffuse Angle(50%): V19.5

Luminaire Efficacy Rating (LER): 29

Max. Intensity: 2570.27 cd

Total Rated Lamp Lumens: 263.4 lm

Efficiency: 100%

Upward Ratio: 0%


Central Intensity: 2506.2 cd

Pos of Max. Intensity: H0 V5

Picture Of Luminaire



Luminous Intensity Distribution Curve

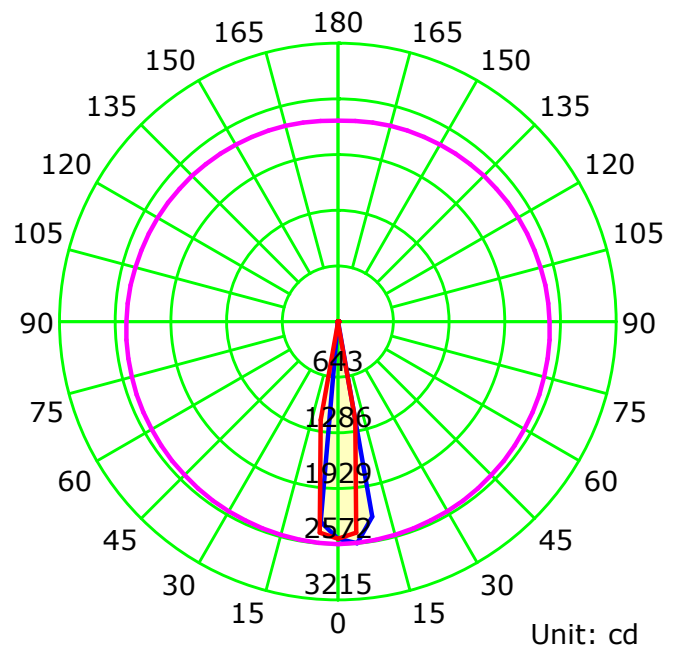

— C0-C180 — C90-C270 — G5

C Plane (°):0.0-180.0: 180.0

Test Lab:

Test Type: TYPE C

Temperature:

Operator:

Gamma Plane (°):0.0-90.0:5.0


Test Device: CHL-6E

Distance: 3.000 m

Humidity:

Inspector:


Luminous Intensity Distribution Curve

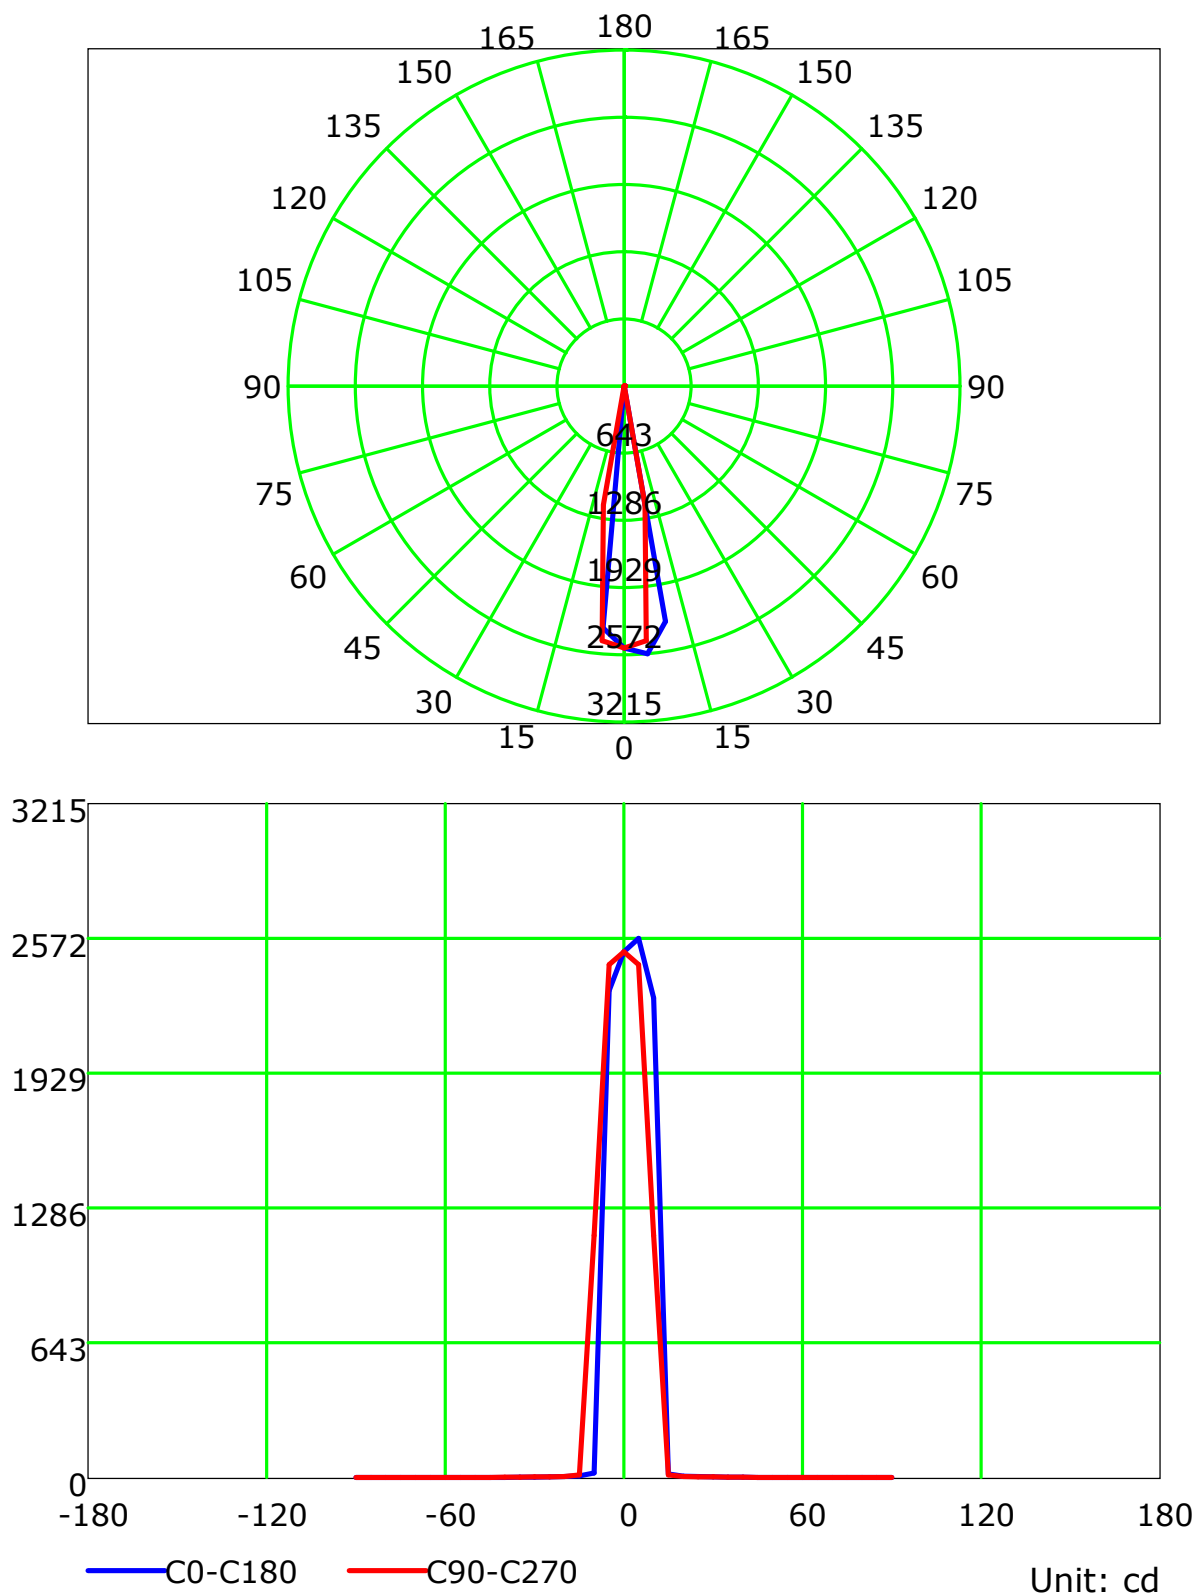

C Plane (°):0.0-180.0: 180.0
Test Lab:
Test Type: TYPE C
Temperature:
Operator:

Gamma Plane (°):0.0-90.0:5.0
Test Device: CHL-6E
Distance: 3.000 m
Humidity:
Inspector:

Isocandela (rectangle)

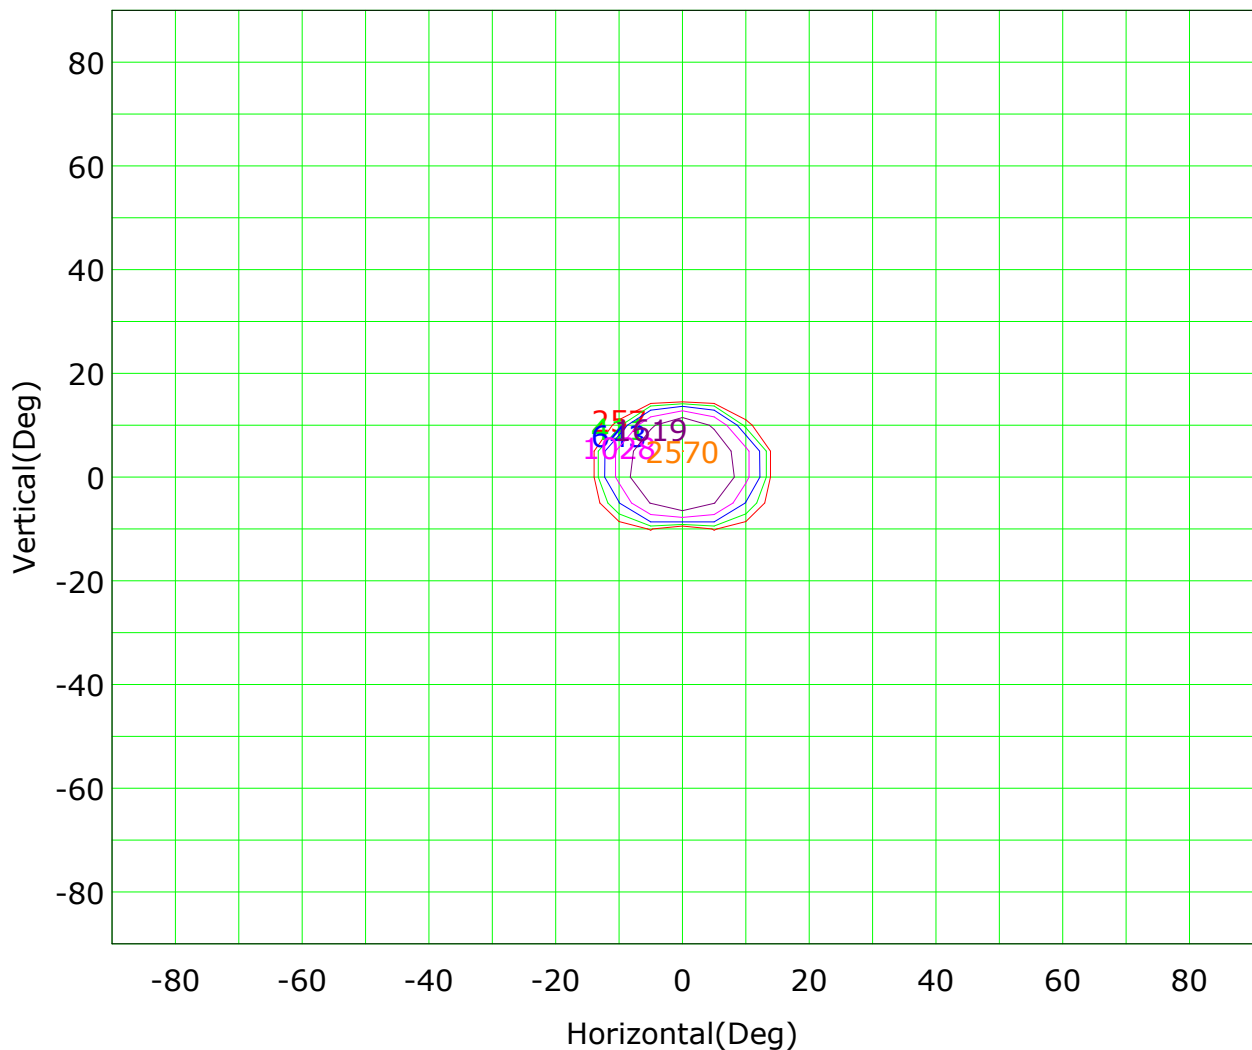

Imax (100%): 2570 cd

(10%): 257 cd	(16%): 411 cd
(25%): 643 cd	(40%): 1028 cd
(63%): 1619 cd	(100%): 2570 cd

C Plane (°):0.0-180.0: 180.0

Test Lab:

Test Type: TYPE C

Temperature:

Operator:

Gamma Plane (°):0.0-90.0:5.0


Test Device: CHL-6E

Distance: 3.000 m

Humidity:

Inspector:

IsoLux Plot

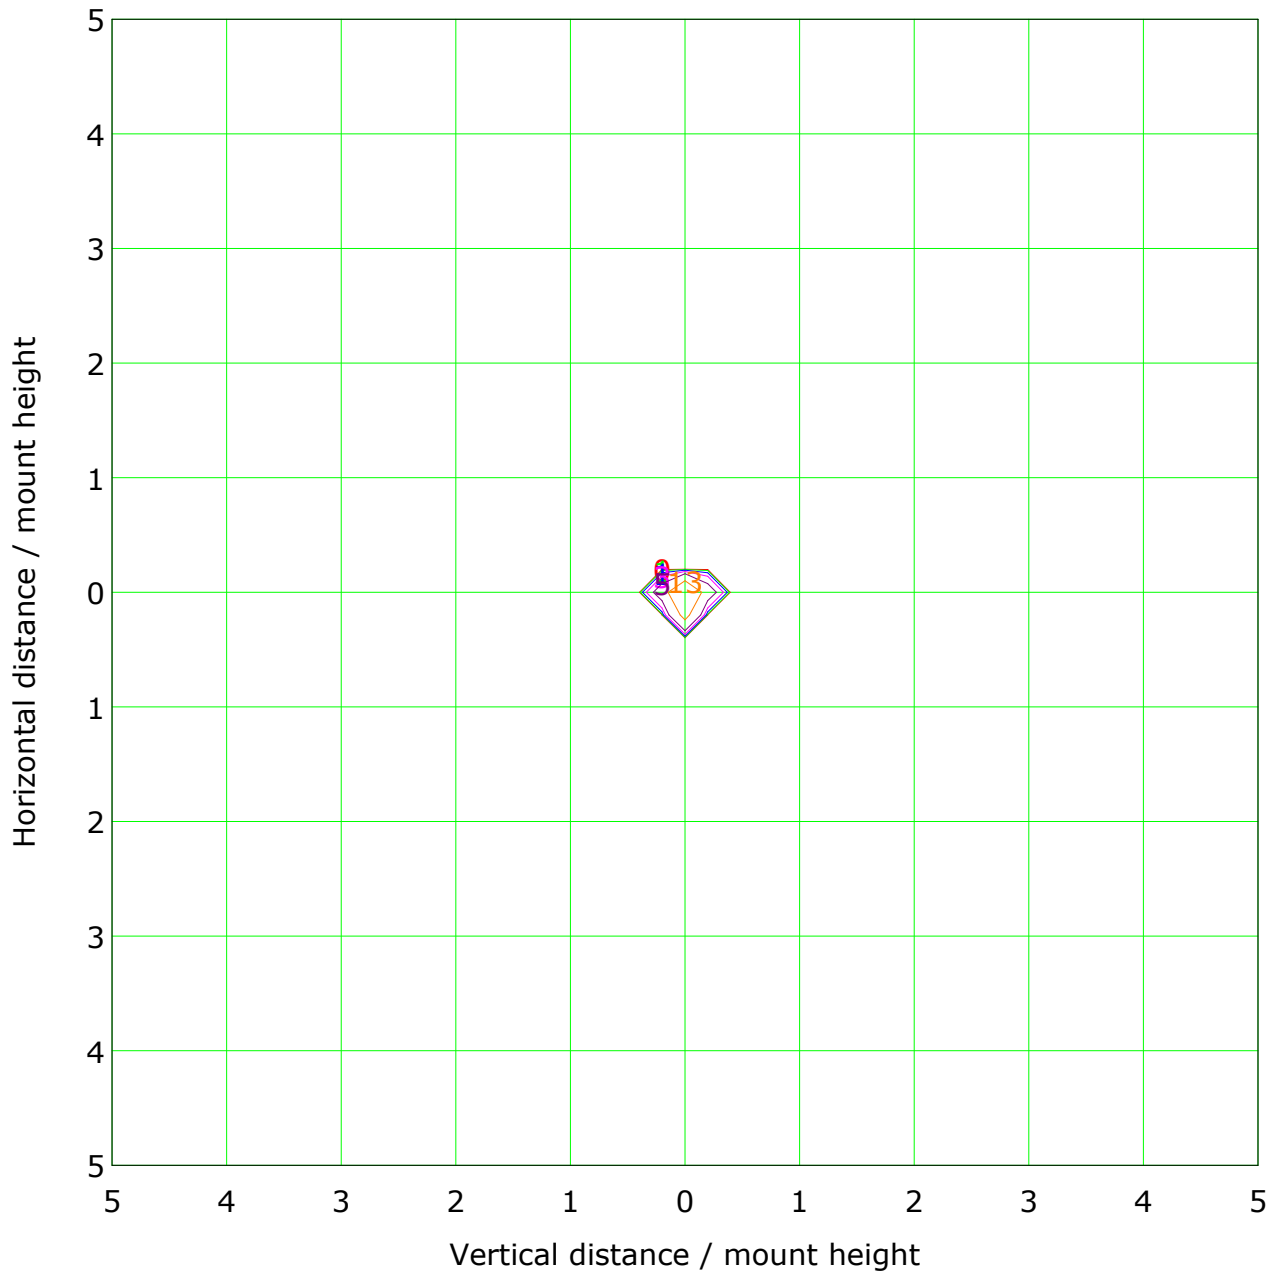

Mounting Height: 10m Max Lux(100%): 25 lx			
— (1%):	0 lx	— (2%):	1 lx
— (5%):	1 lx	— (10%):	3 lx
— (20%):	5 lx	— (50%):	13 lx
— (100%):	25 lx		

C Plane (°):0.0-180.0: 180.0

Test Lab:

Test Type: TYPE C

Temperature:

Operator:

Gamma Plane (°):0.0-90.0:5.0


Test Device: CHL-6E

Distance: 3.000 m


Humidity:

Inspector:

Illuminance at a Distance

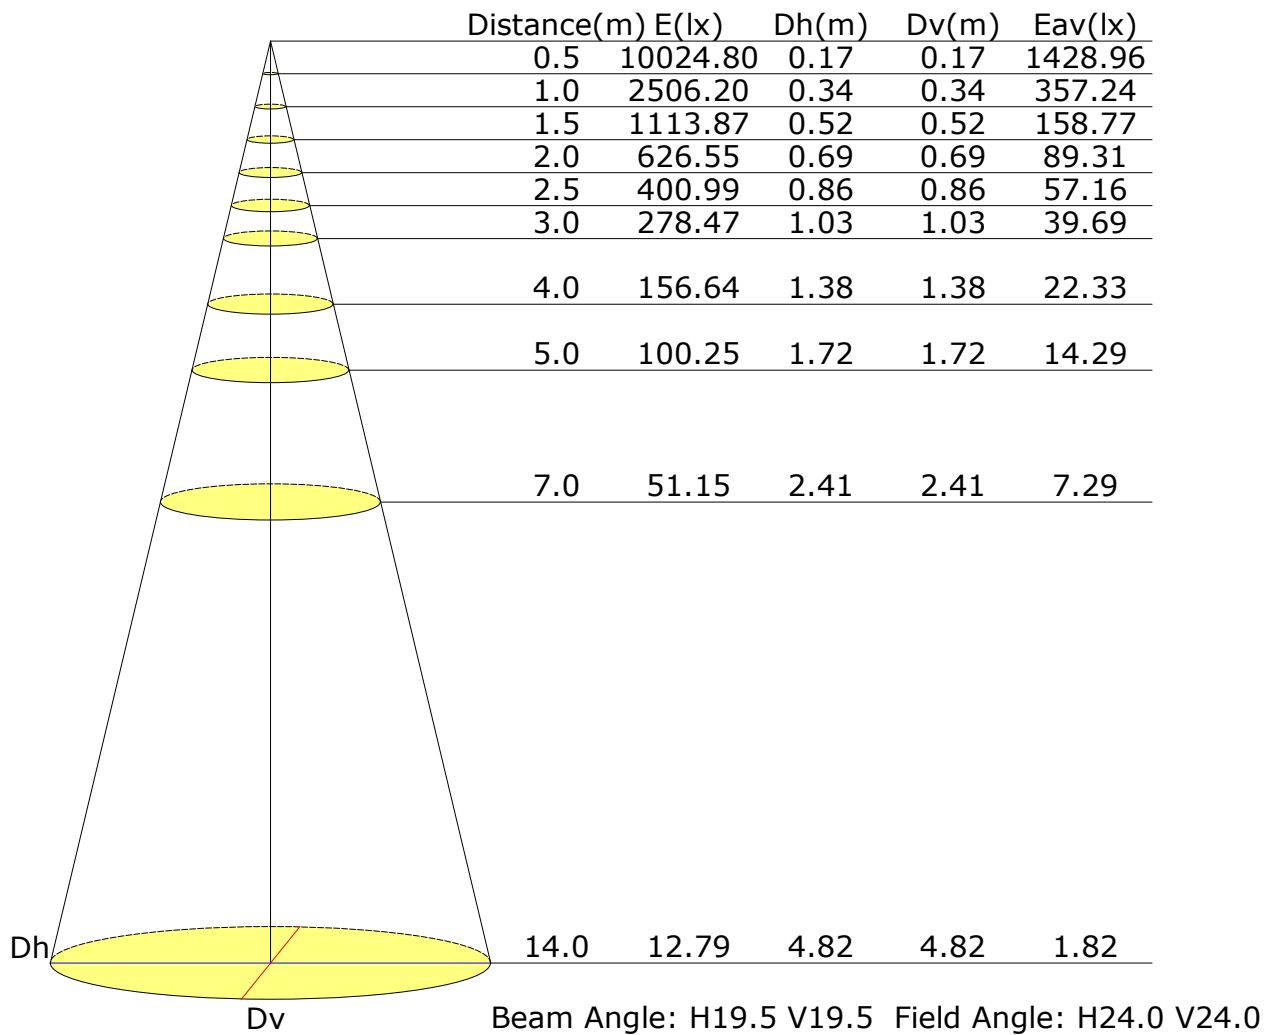

Vertical IsoLux Plot

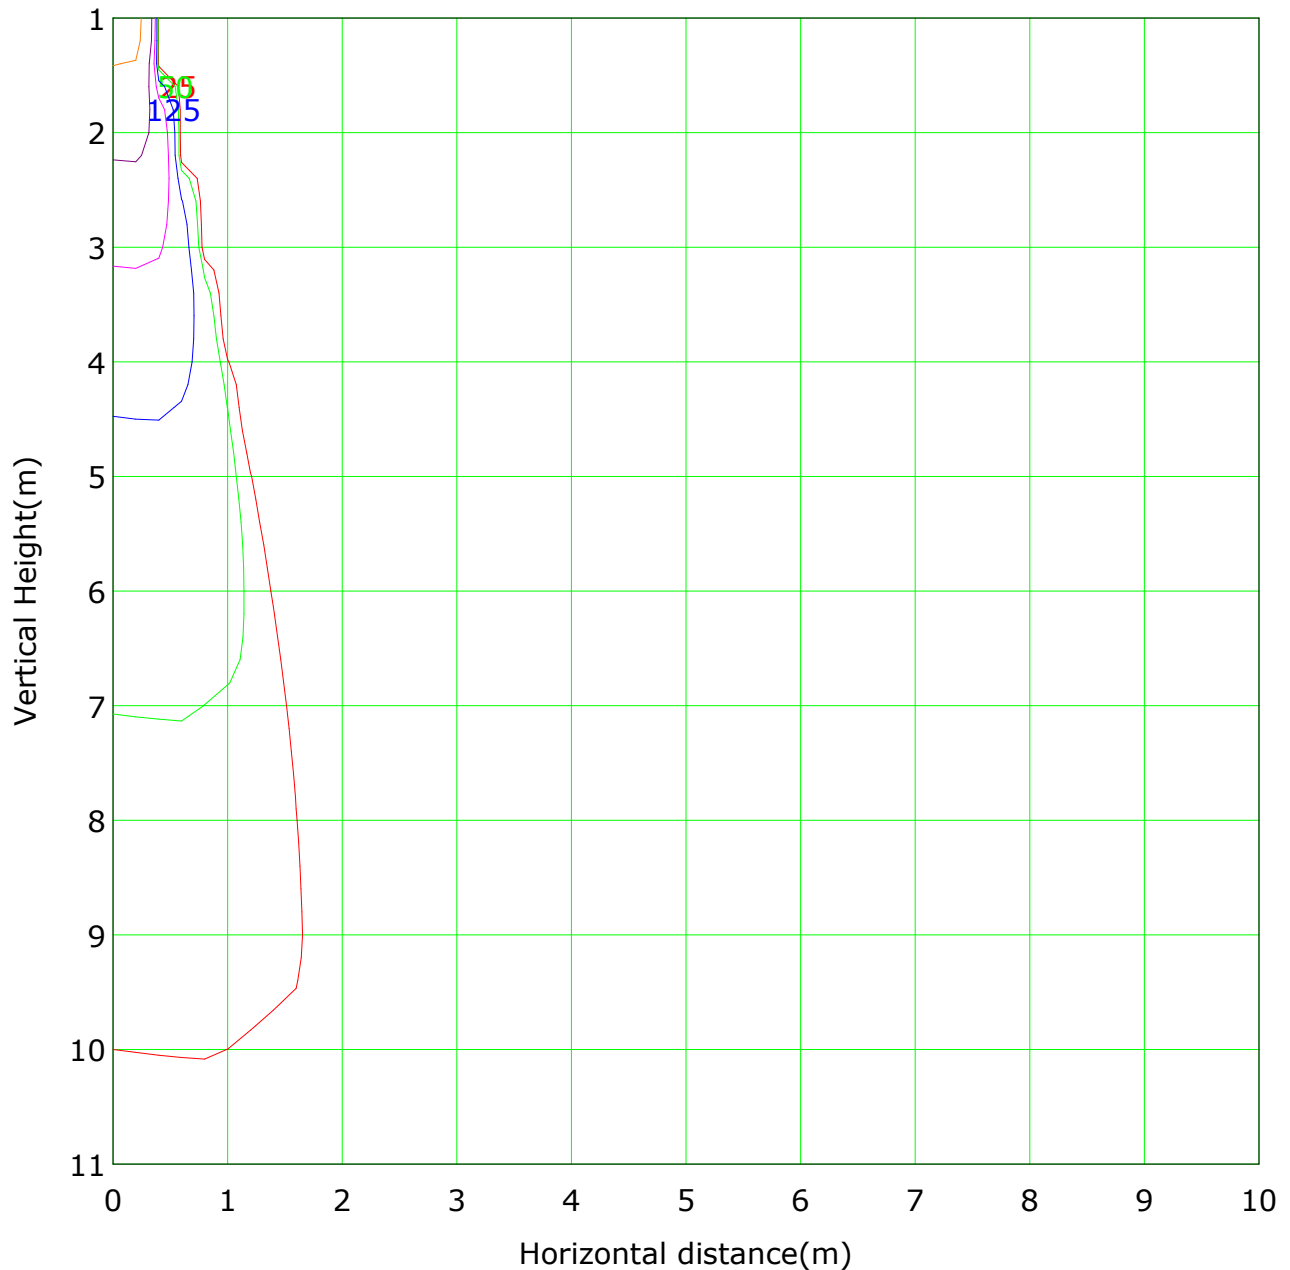


Lowest(m): 1m Highest(m): 11 Max Lux: 2506

(1%): 25 lx	(2%): 50 lx
(5%): 125 lx	(10%): 251 lx
(20%): 501 lx	(50%): 1253 lx
(100%): 2506 lx	

C Plane (°):0.0-180.0: 180.0
Test Lab:
Test Type: TYPE C
Temperature:
Operator:

Gamma Plane (°):0.0-90.0:5.0
Test Device: CHL-6E
Distance: 3.000 m
Humidity:
Inspector:

The average illuminance effective figure

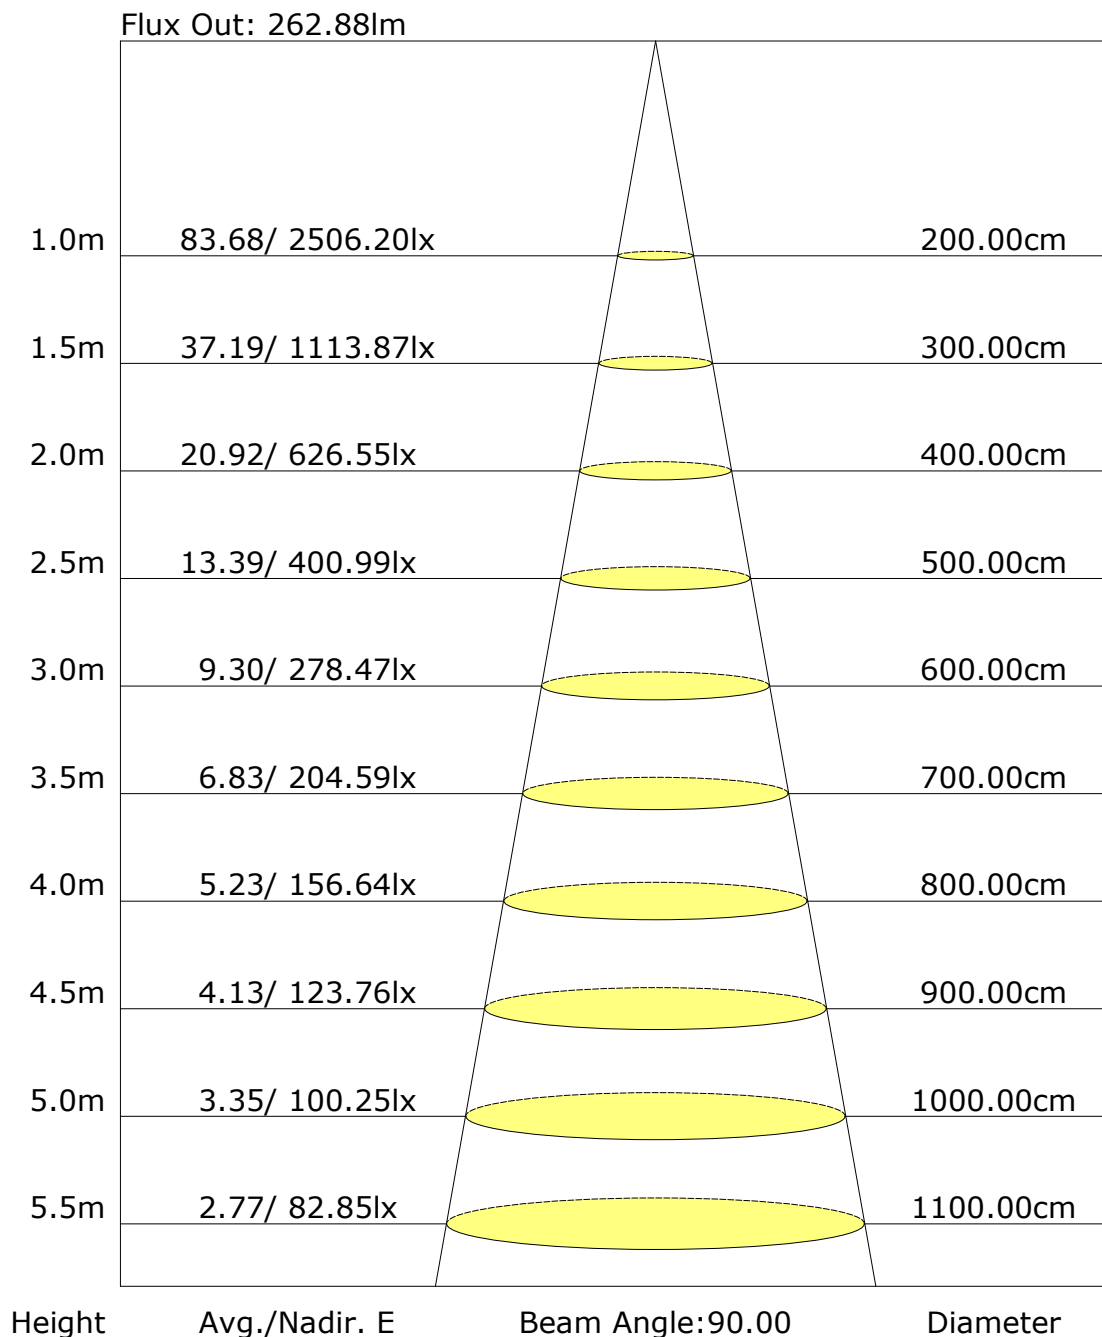

C Plane (°): 0.0-180.0: 180.0
Test Lab:
Test Type: TYPE C
Temperature:
Operator:

Gamma Plane (°): 0.0-90.0: 5.0
Test Device: CHL-6E
Distance: 3.000 m
Humidity:
Inspector:

Zonal Lumen

[illegible]

Inspector:

Candlepower Table

Unit: cd

[illegible]

C Plane (°):0.0-180.0: 180.0

Test Lab:

Test Type: TYPE C

Temperature:

Operator:

Gamma Plane (°):0.0-90.0:5.0

Test Device: CHL-6E

Distance: 3.000 m

Humidity:

Inspector: