
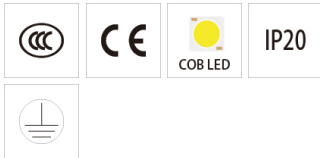
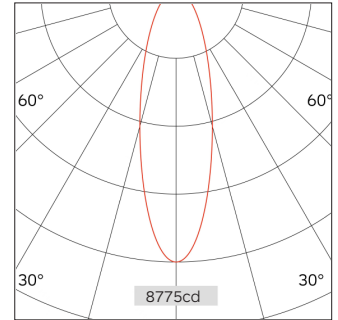


51.07513 SLIM Recessed Downlight

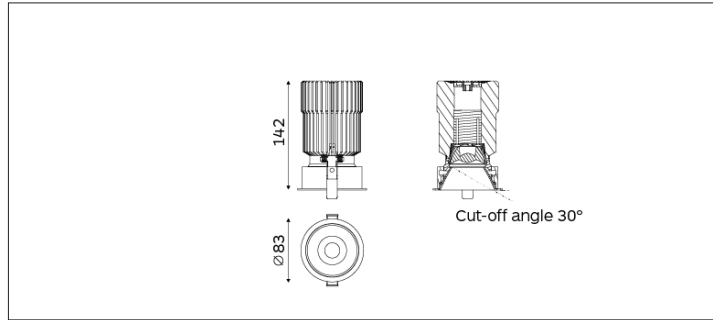

Light Distribution	SLIM Recessed Downlight
Colour Temperature	2700/3000/3500/4000K
Colour Rendition Index	CRI 90
Optics	LENS
Beam Angle	19D/28D/38D
Cut Out	75mm
Connected Load	32W
Luminous Flux Of The Luminaire	2156lm
Luminaire Efficacy	66m/W
Colour Deviation	SDCM <5
Light Source	LED
LED Type	COB
Dimming Method	Triac/1-10V/ Dali
Cover Material	Aluminum
Body Material	Aluminum
IP Rating	IP20
Housing Colour	Sandy White/ Sandy Black
Weight	0.8Kg
Technical Region	220-240V 50/60Hz

Light Beam Talbe		
h(m)	E(lx)	D(m)
		28°
1.0	8775	0.51
2.0	2193	1.02
3.0	975	1.54
4.0	548	2.05
5.0	351	2.56

Application areas: High end residential and retail projects, hotels, museums and galleries.