
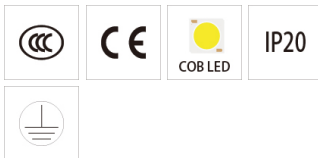
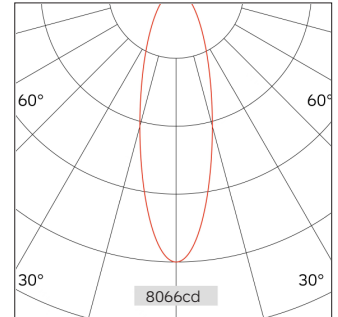


51.07512 SLIM Recessed Downlight

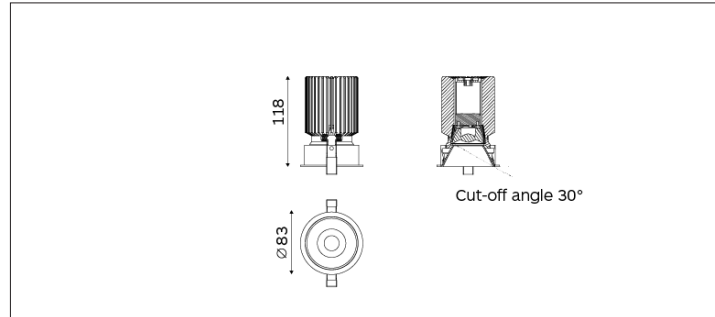

Light Distribution	SLIM Recessed Downlight
Colour Temperature	2700/3000/3500/4000K
Colour Rendition Index	CRI 90
Optics	LENS
Beam Angle	15D/25D/35D
Cut Out	75mm
Connected Load	26W
Luminous Flux Of The Luminaire	1638lm
Luminaire Efficacy	63m/W
Colour Deviation	SDCM <5
Light Source	LED
LED Type	COB
Dimming Method	Triac/1-10V/ Dali
Cover Material	Aluminum
Body Material	Aluminum
IP Rating	IP20
Housing Colour	Sandy White/ Sandy Black
Weight	0.65Kg
Technical Region	220-240V 50/60Hz

Light Beam Talbe		
h(m)	E(lx)	D(m)
		25°
1.0	8066	0.46
2.0	2016	0.91
3.0	896	1.37
4.0	504	1.83
5.0	322	2.28

Application areas: High end residential and retail projects, hotels, museums and galleries.