

Report No.: 51.04011 Recessed Downlight Test Time: 2023-07-01 20:23

Luminaire Property

Luminaire Category: Bridgelux V4HD 3000K CRI90
Luminaire Description: 24D Voltage: 218.8 V
Current: 0.063 A Power: 8.00 W
Power Factor: 0.577


Photometric Results

CIE Class: Direct
Measurement Flux: 518.5 lm
Downward Ratio: 100%
Horizontal Diffuse Angle(50%): H21.9
Vertical Diffuse Angle(50%): V21.9
Luminaire Efficacy Rating (LER): 65
Max. Intensity: 2833.58 cd


Total Rated Lamp Lumens: 518.5 lm
Efficiency: 100%
Upward Ratio: 0%

Central Intensity: 2833.57 cd
Pos of Max. Intensity: H0 V0

Picture Of Luminaire



Luminous Intensity Distribution Curve


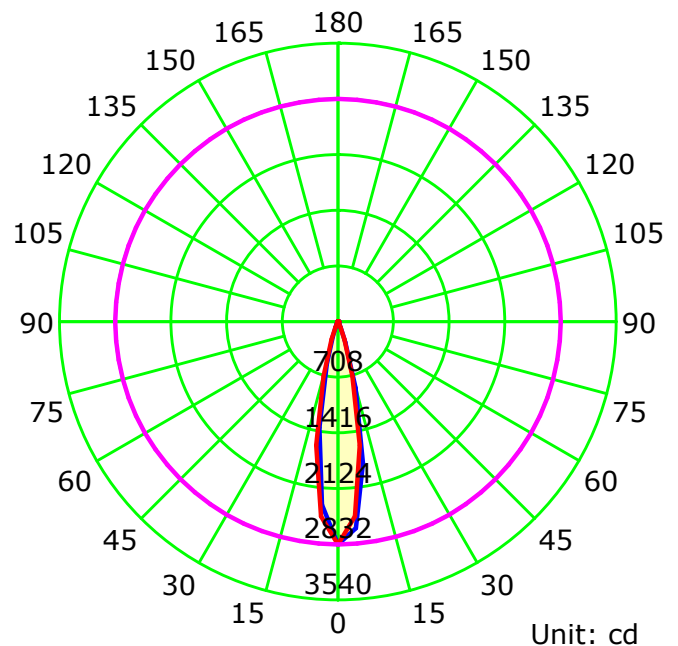


— C0-C180 — C90-C270 — G0

C Plane (°):0.0-180.0: 180.0
Test Lab:
Test Type: TYPE C
Temperature:
Operator:

Gamma Plane (°):0.0-90.0:5.0
Test Device: CHL-6E
Distance: 3.000 m
Humidity:
Inspector:


Luminous Intensity Distribution Curve

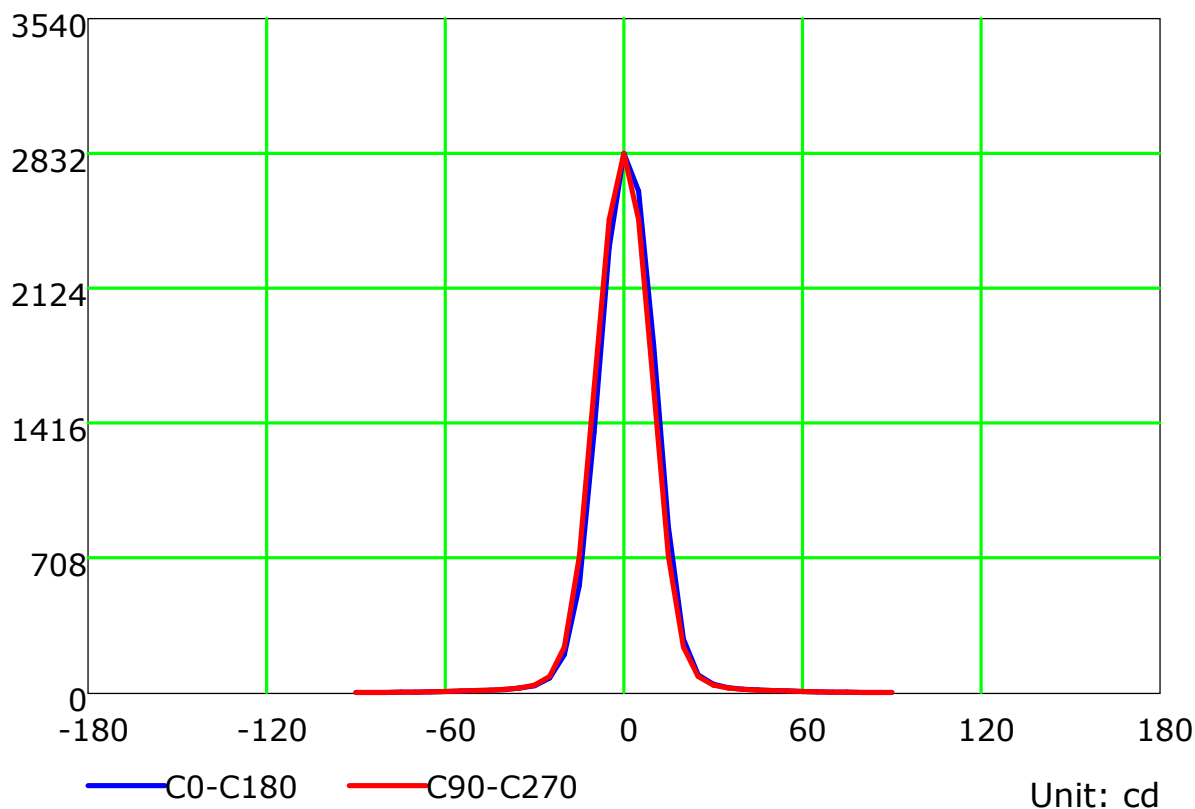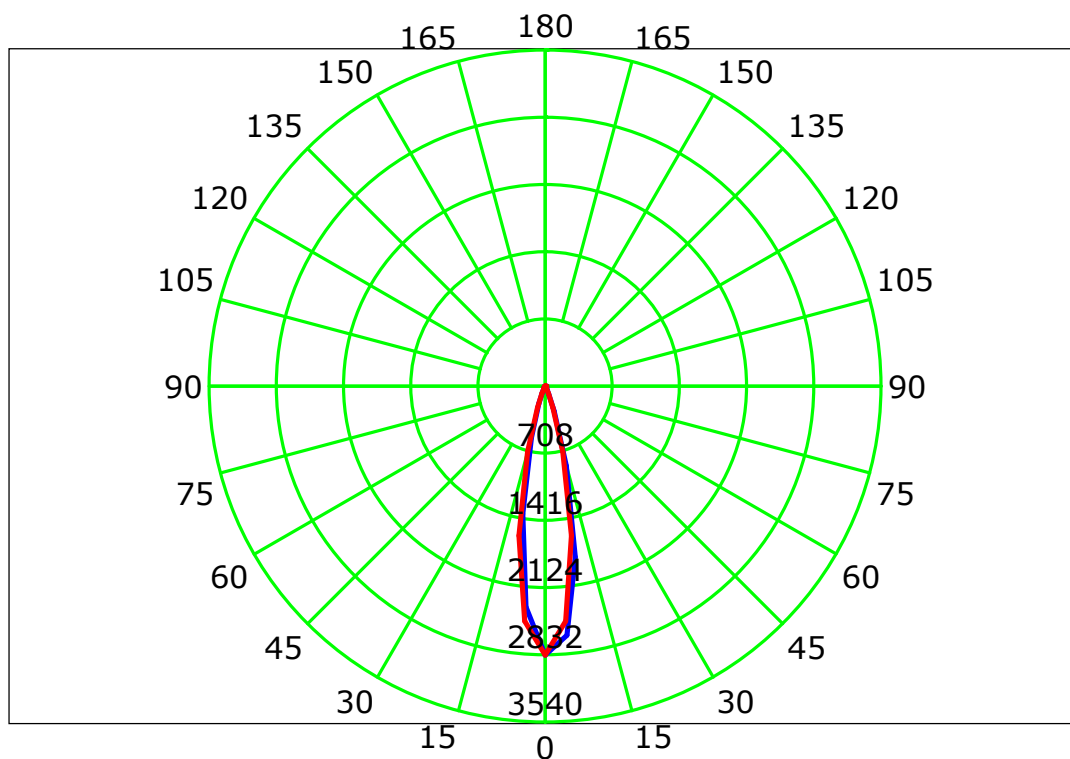

C Plane (°):0.0-180.0: 180.0
Test Lab:
Test Type: TYPE C
Temperature:
Operator:

Gamma Plane (°):0.0-90.0:5.0
Test Device: CHL-6E
Distance: 3.000 m
Humidity:
Inspector:

Isocandela (rectangle)

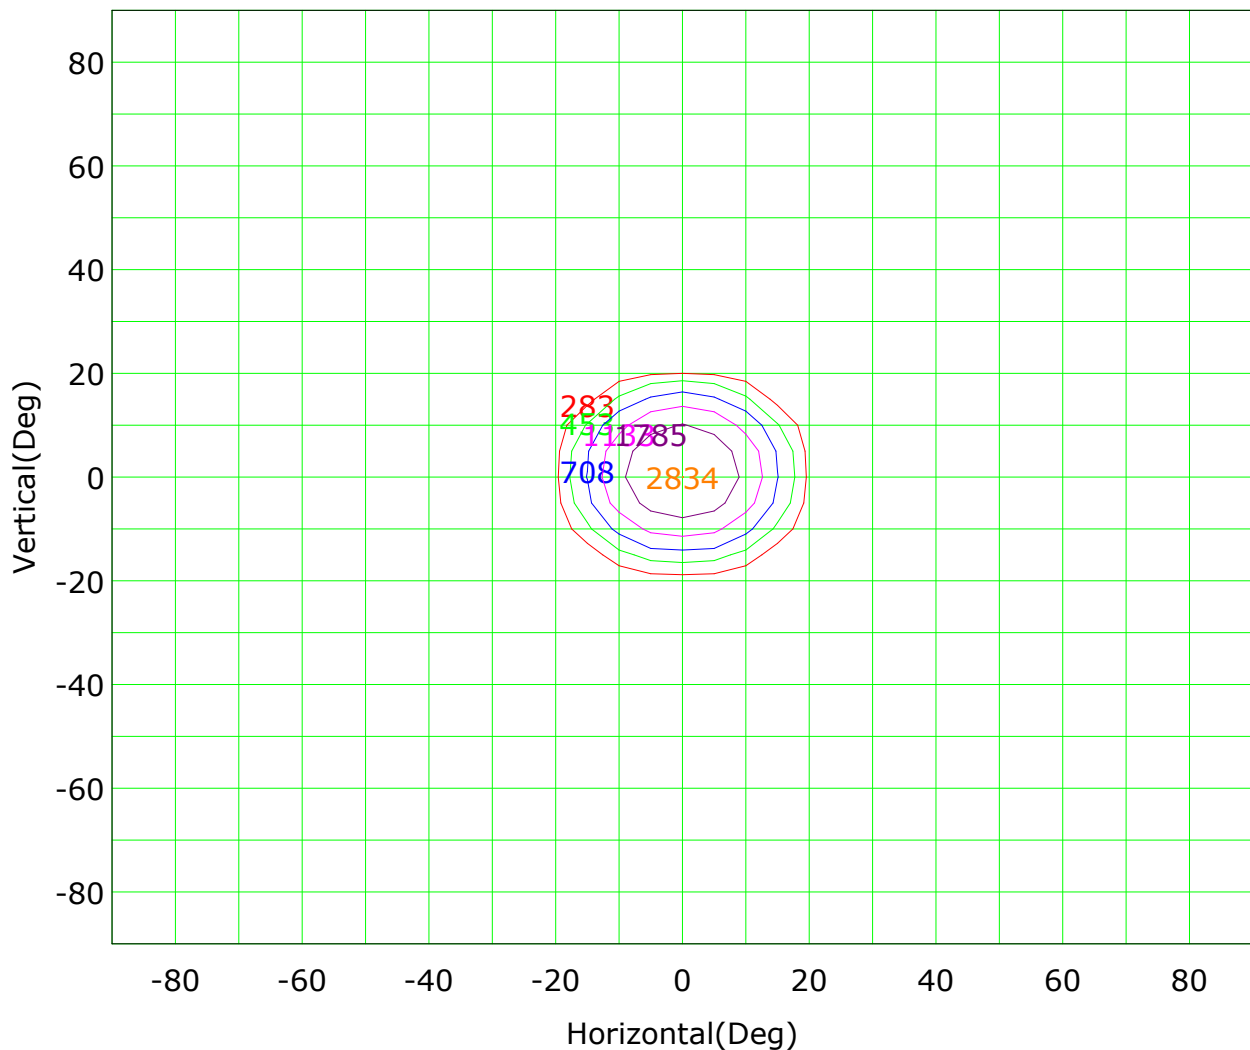

Imax (100%): 2834 cd

(10%): 283 cd	(16%): 453 cd
(25%): 708 cd	(40%): 1133 cd
(63%): 1785 cd	(100%): 2834 cd

C Plane (°):0.0-180.0: 180.0

Test Lab:

Test Type: TYPE C

Temperature:

Operator:

Gamma Plane (°):0.0-90.0:5.0


Test Device: CHL-6E

Distance: 3.000 m

Humidity:

Inspector:

IsoLux Plot

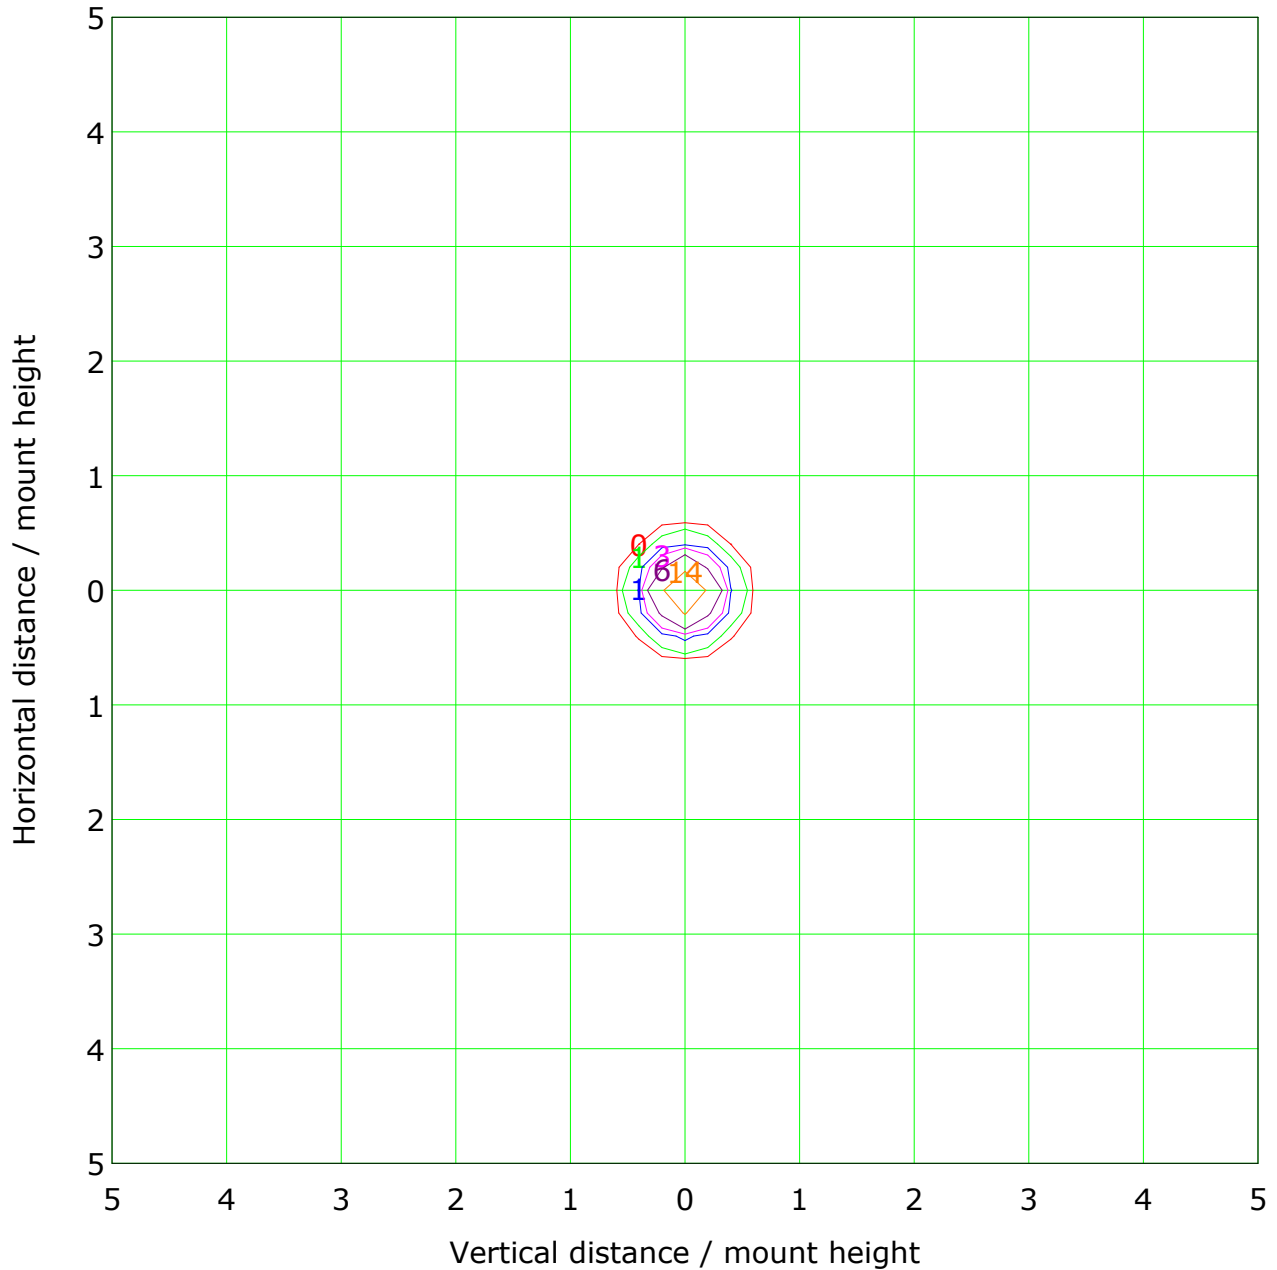

Mounting Height: 10m		Max Lux(100%): 28 lx	
(1%):	0 lx	(2%):	1 lx
(5%):	1 lx	(10%):	3 lx
(20%):	6 lx	(50%):	14 lx
(100%):	28 lx		

C Plane (°):0.0-180.0: 180.0

Test Lab:

Test Type: TYPE C

Temperature:

Operator:

Gamma Plane (°):0.0-90.0:5.0


Test Device: CHL-6E

Distance: 3.000 m


Humidity:

Inspector:

Illuminance at a Distance

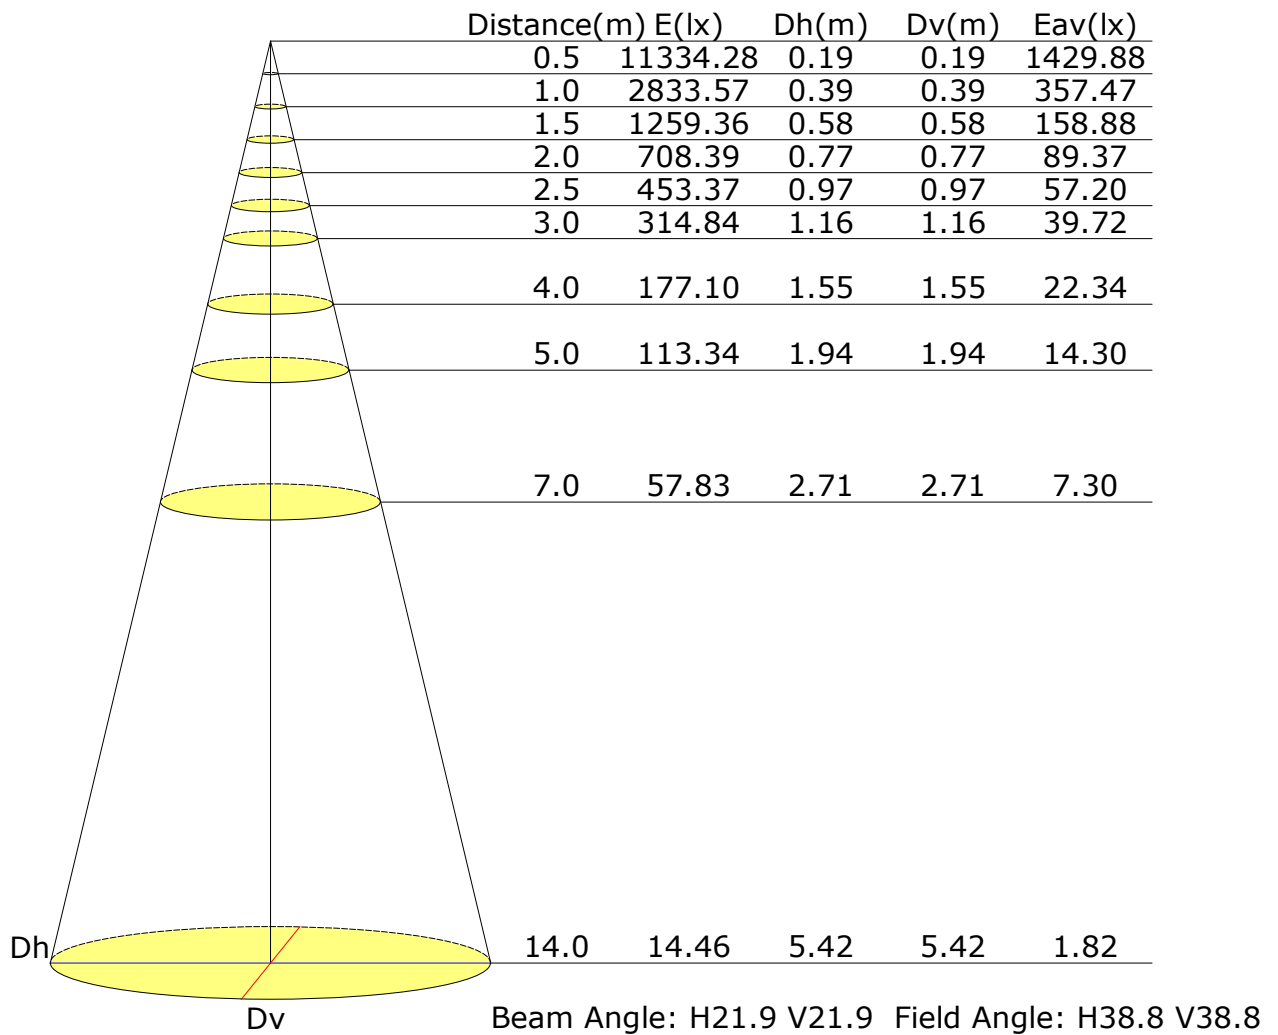

Vertical IsoLux Plot

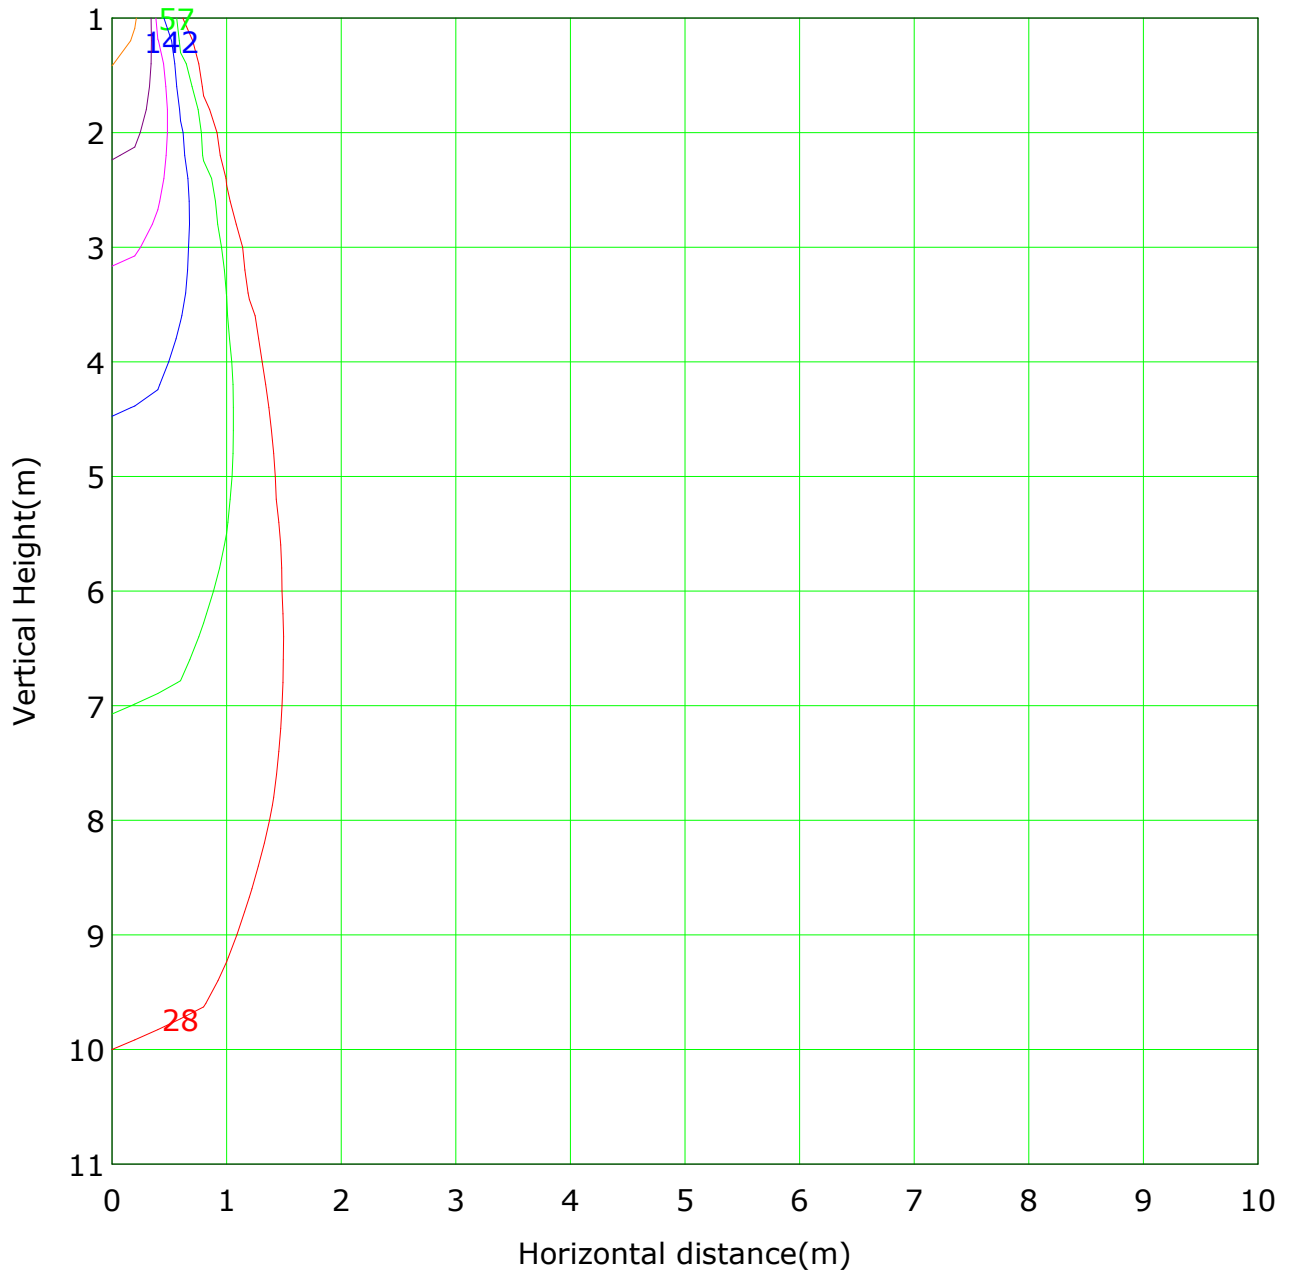


Lowest(m): 1m Highest(m): 11 Max Lux: 2834

(1%): 28 lx	(2%): 57 lx
(5%): 142 lx	(10%): 283 lx
(20%): 567 lx	(50%): 1417 lx
(100%): 2834 lx	

C Plane (°):0.0-180.0: 180.0
Test Lab:
Test Type: TYPE C
Temperature:
Operator:

Gamma Plane (°):0.0-90.0:5.0
Test Device: CHL-6E
Distance: 3.000 m
Humidity:
Inspector:

The average illuminance effective figure

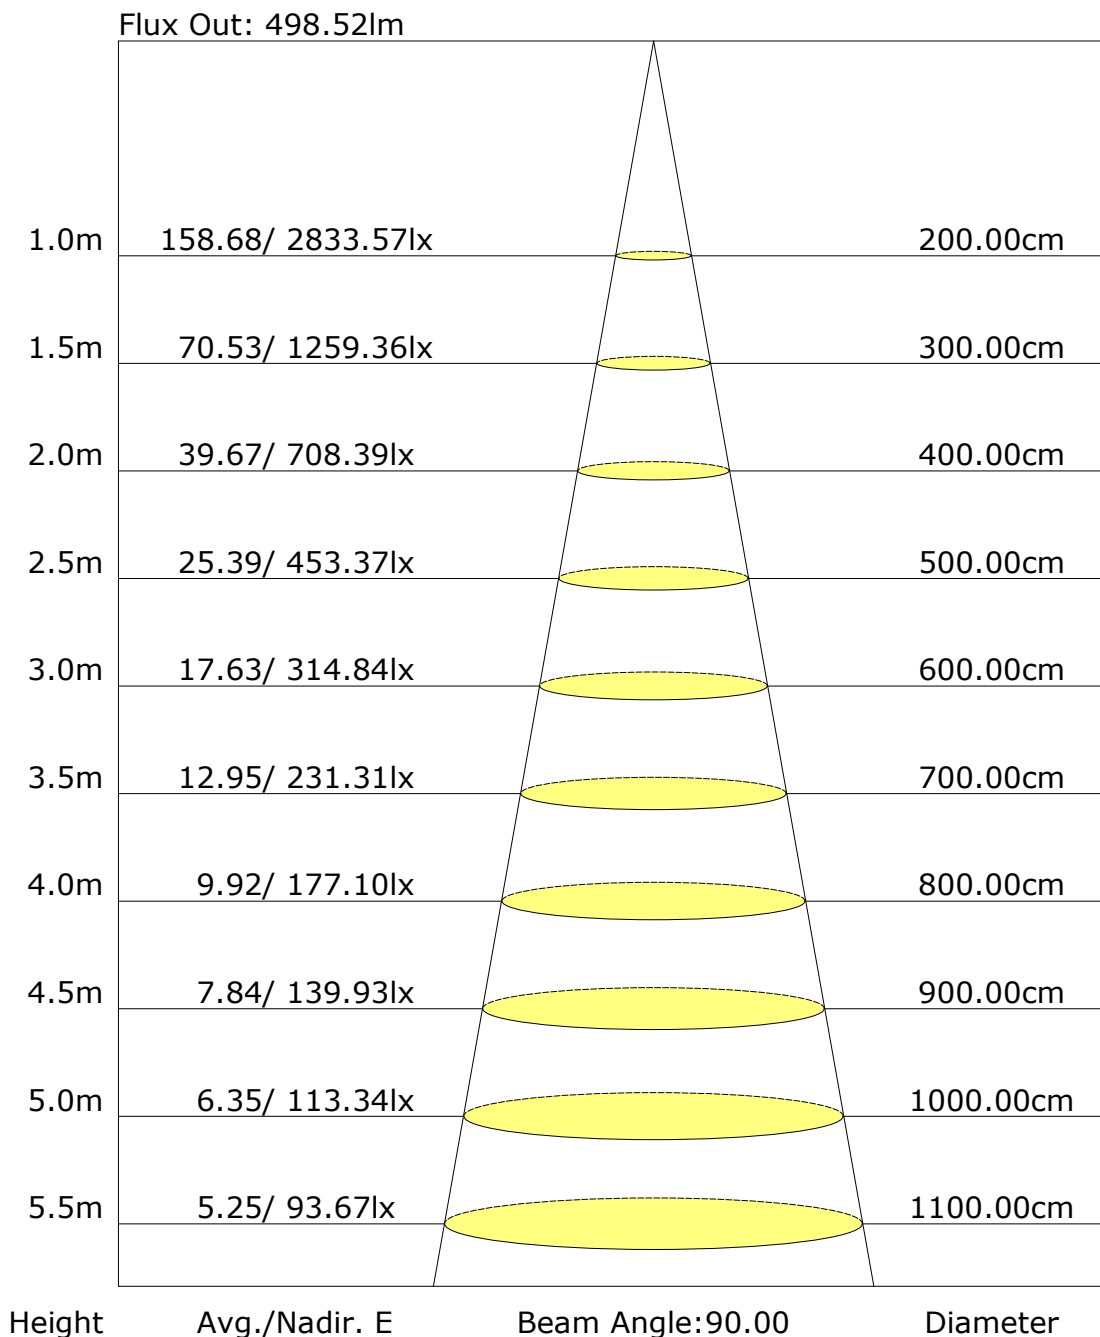

C Plane (°): 0.0-180.0: 180.0
Test Lab:
Test Type: TYPE C
Temperature:
Operator:

Gamma Plane (°): 0.0-90.0: 5.0
Test Device: CHL-6E
Distance: 3.000 m
Humidity:
Inspector:

Zonal Lumen

[illegible]

Inspector:

Candlepower Table

Unit: cd

[illegible]

C Plane (°):0.0-180.0: 180.0

Test Lab:

Test Type: TYPE C

Temperature:

Operator:

Gamma Plane (°):0.0-90.0:5.0

Test Device: CHL-6E

Distance: 3.000 m

Humidity:

Inspector: