
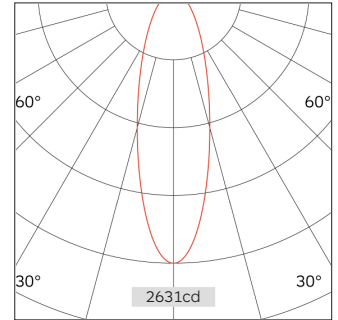
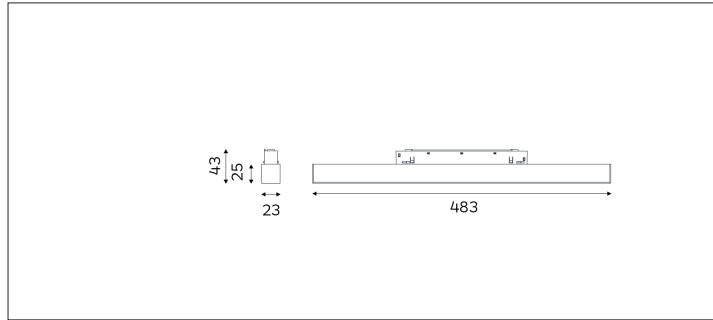


# 61.02310 SPARK 20 Accent Lighting



Connected Load	15W
Colour Temperature	2700/3000/3500/4000K
Colour Rendition Index	CRI 90
Optics	Reflector
Beam Angle	31D/52D
Track	Low Voltage Track
Light Distribution	SPARK 20 Accent Lighting
Luminous Flux Of The Luminaire	950lm
Luminaire Efficacy	71lm/W
Colour Deviation	SDCM <5
Light Source	LED
LED Type	SMD
Dimming Method	1-10V/ Dali
Cover Material	Aluminum
Body Material	Aluminum
IP Rating	IP20
Housing Colour	Matt White/ Matt Black
Weight	0.5Kg
Technical Region	Input 48V

Light Beam Table		
h(m)	E(lx)	D(m)
		31°
1.0	2595	0.56
2.0	648	1.11
3.0	288	1.67
4.0	162	2.22
5.0	103	2.78

It is an individual solution with a high degree of flexibility. all inserts are mounted completely without tools and held within the profile by a magnetic force. With just one flick of the wrist, you can adjust the inserts as needed at any time to set the scene for your desired object. Application areas: residential, hotel, restaurants, retail and other high-end places.