
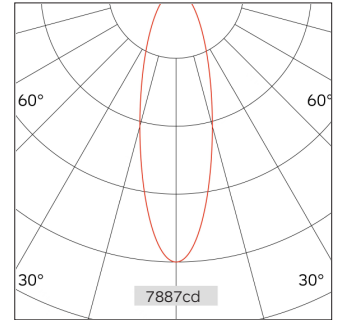


52.09526 SILO Recessed Downlight Trimless

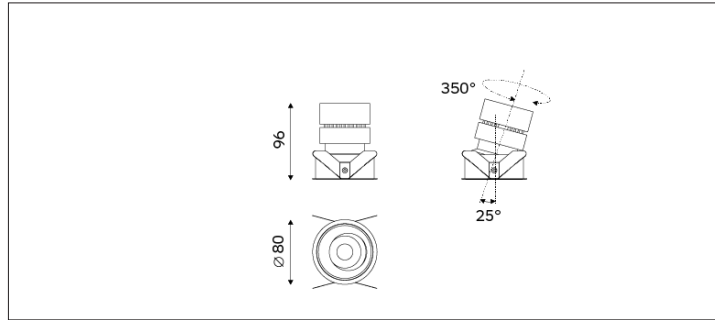

Light Distribution	SILO Recessed Downlight
Colour Temperature	2700/3000/3500/4000K
Colour Rendition Index	CRI 90
Optics	LENS
Beam Angle	19D/25D/37D
Cut Out	95mm
Connected Load	25W
Luminous Flux Of The Luminaire	1616lm
Luminaire Efficacy	80lm/W
Colour Deviation	SDCM <5
Light Source	LED
LED Type	COB
Dimming Method	Triac/1-10V/ Dali
Cover Material	Aluminum
Body Material	Aluminum
IP Rating	IP20
Housing Colour	Sandy White/ Sandy Black
Weight	0.6Kg
Technical Region	220-240V 50/60Hz

Light Beam Talbe		
h(m)	E(lx)	D(m)
		25°
1.0	7887	0.44
2.0	1971	0.89
3.0	876	1.33
4.0	492	1.77
5.0	315	2.22

Star hotel rooms, aisles, villas, high-end private clubs, restaurants and other commercial spaces (such as furniture stores, ceramic and sanitary ware chain shops, brand chain shops and other commercial atmosphere lighting applications)