

Report No.:56.03513 Recessed Downlight Test Time: 2023-06-30 19:51

Luminaire Property


Luminaire Category: Citizen 1202 3000K CRI90
Luminaire Description: FOS 45 36D Voltage: 216.6 V
Current: 0.118 A Power: 9.60 W
Power Factor: 0.369

Photometric Results


CIE Class: Direct
Measurement Flux: 610.9 lm
Downward Ratio: 100%
Horizontal Diffuse Angle(50%): H32.7
Vertical Diffuse Angle(50%): V32.7
Luminaire Efficacy Rating (LER): 64
Max. Intensity: 1740.11 cd

Total Rated Lamp Lumens: 610.9 lm
Efficiency: 100%
Upward Ratio: 0%
Central Intensity: 1740.11 cd
Pos of Max. Intensity: H0 V0

Picture Of Luminaire



Luminous Intensity Distribution Curve


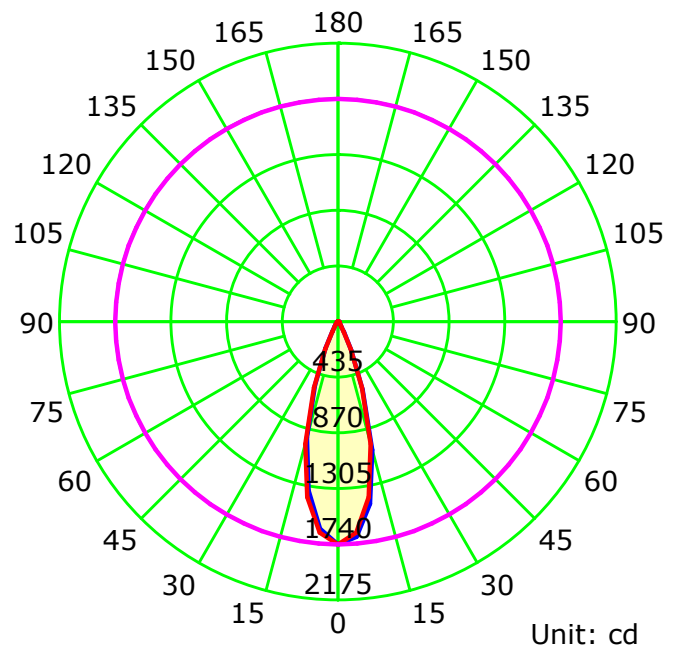


— C0-C180 — C90-C270 — G0

C Plane (°):0.0-180.0: 180.0
Test Lab:
Test Type: TYPE C
Temperature:
Operator:

Gamma Plane (°):0.0-90.0:5.0
Test Device: CHL-6E
Distance: 3.000 m
Humidity:
Inspector:


Luminous Intensity Distribution Curve

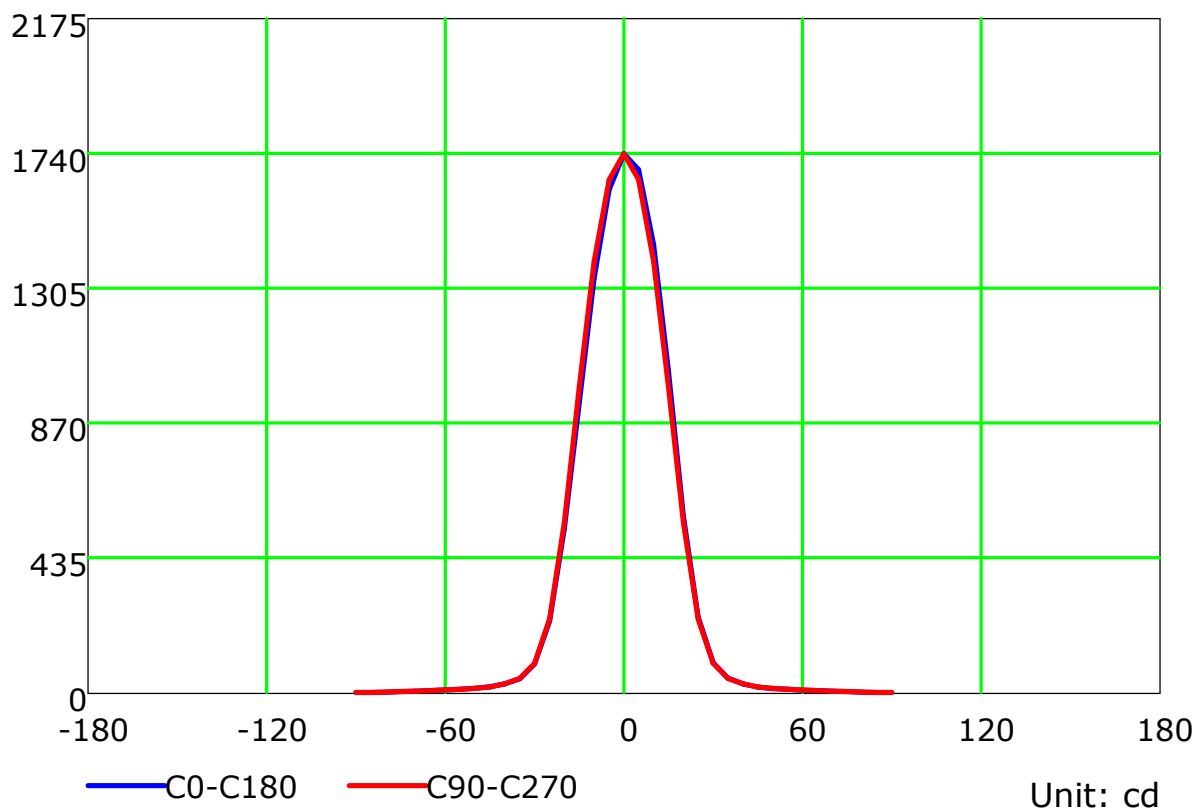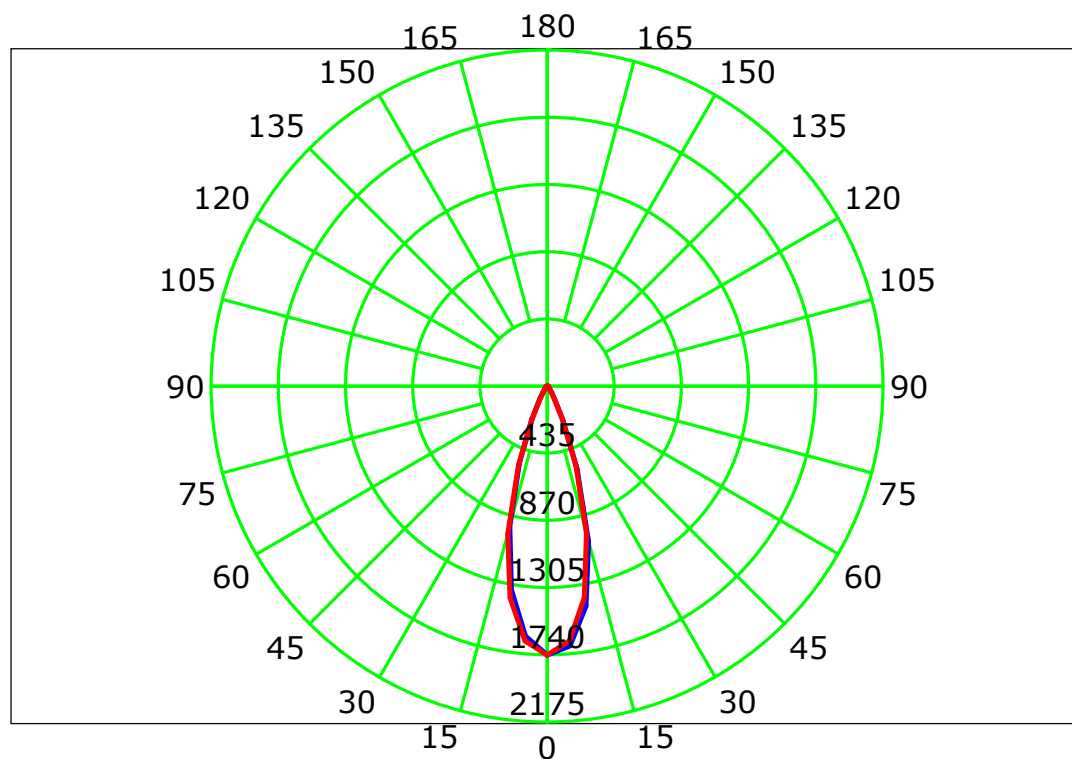

C Plane (°):0.0-180.0: 180.0
Test Lab:
Test Type: TYPE C
Temperature:
Operator:

Gamma Plane (°):0.0-90.0:5.0
Test Device: CHL-6E
Distance: 3.000 m
Humidity:
Inspector:

Isocandela (rectangle)

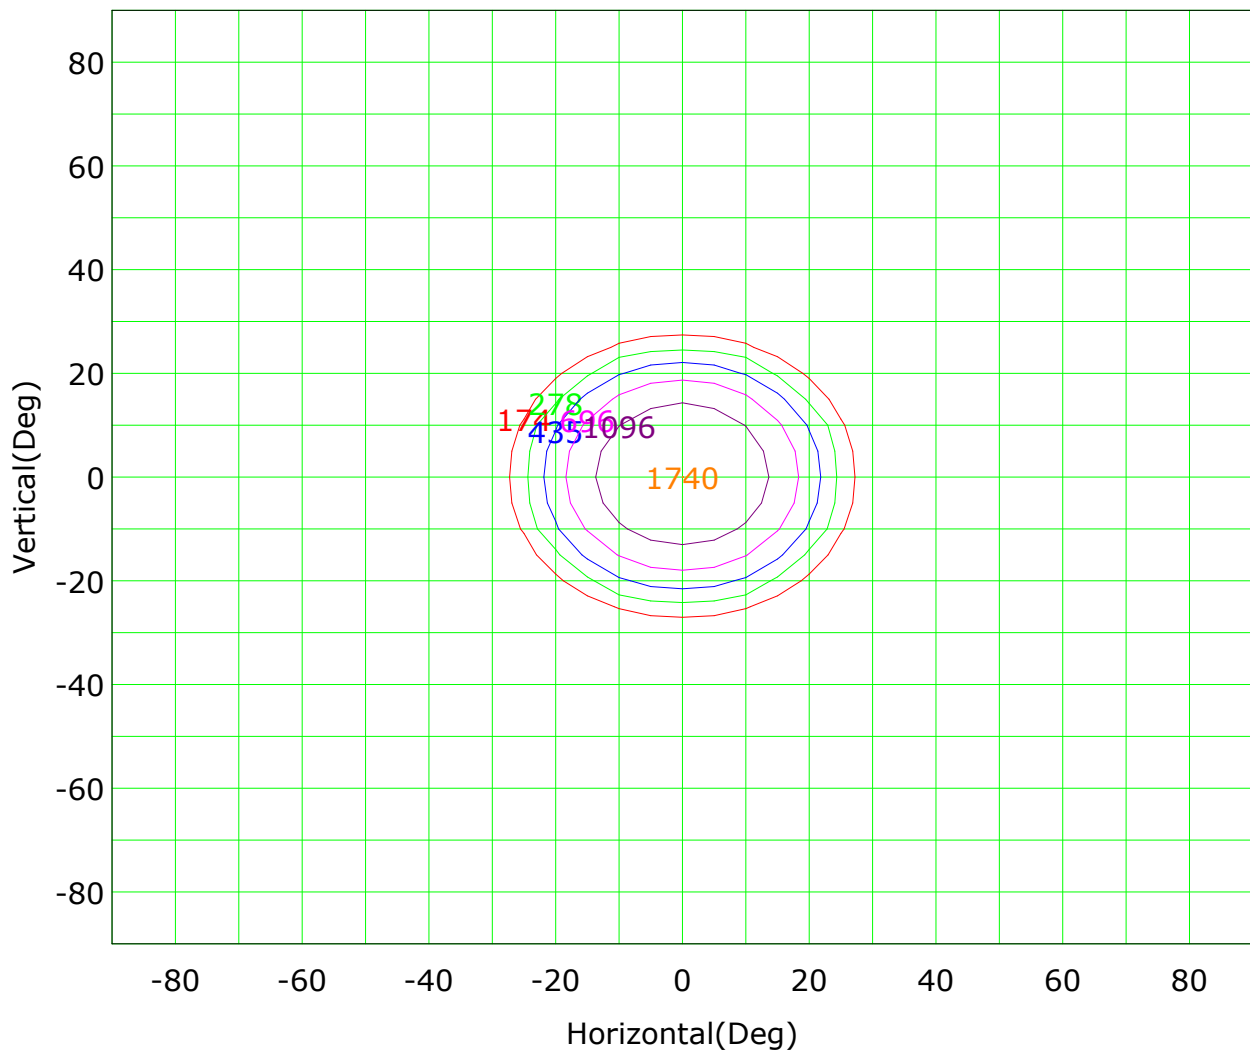

Imax (100%): 1740 cd

(10%): 174 cd	(16%): 278 cd
(25%): 435 cd	(40%): 696 cd
(63%): 1096 cd	(100%): 1740 cd

C Plane (°):0.0-180.0: 180.0

Test Lab:

Test Type: TYPE C

Temperature:

Operator:

Gamma Plane (°):0.0-90.0:5.0


Test Device: CHL-6E

Distance: 3.000 m

Humidity:

Inspector:

IsoLux Plot

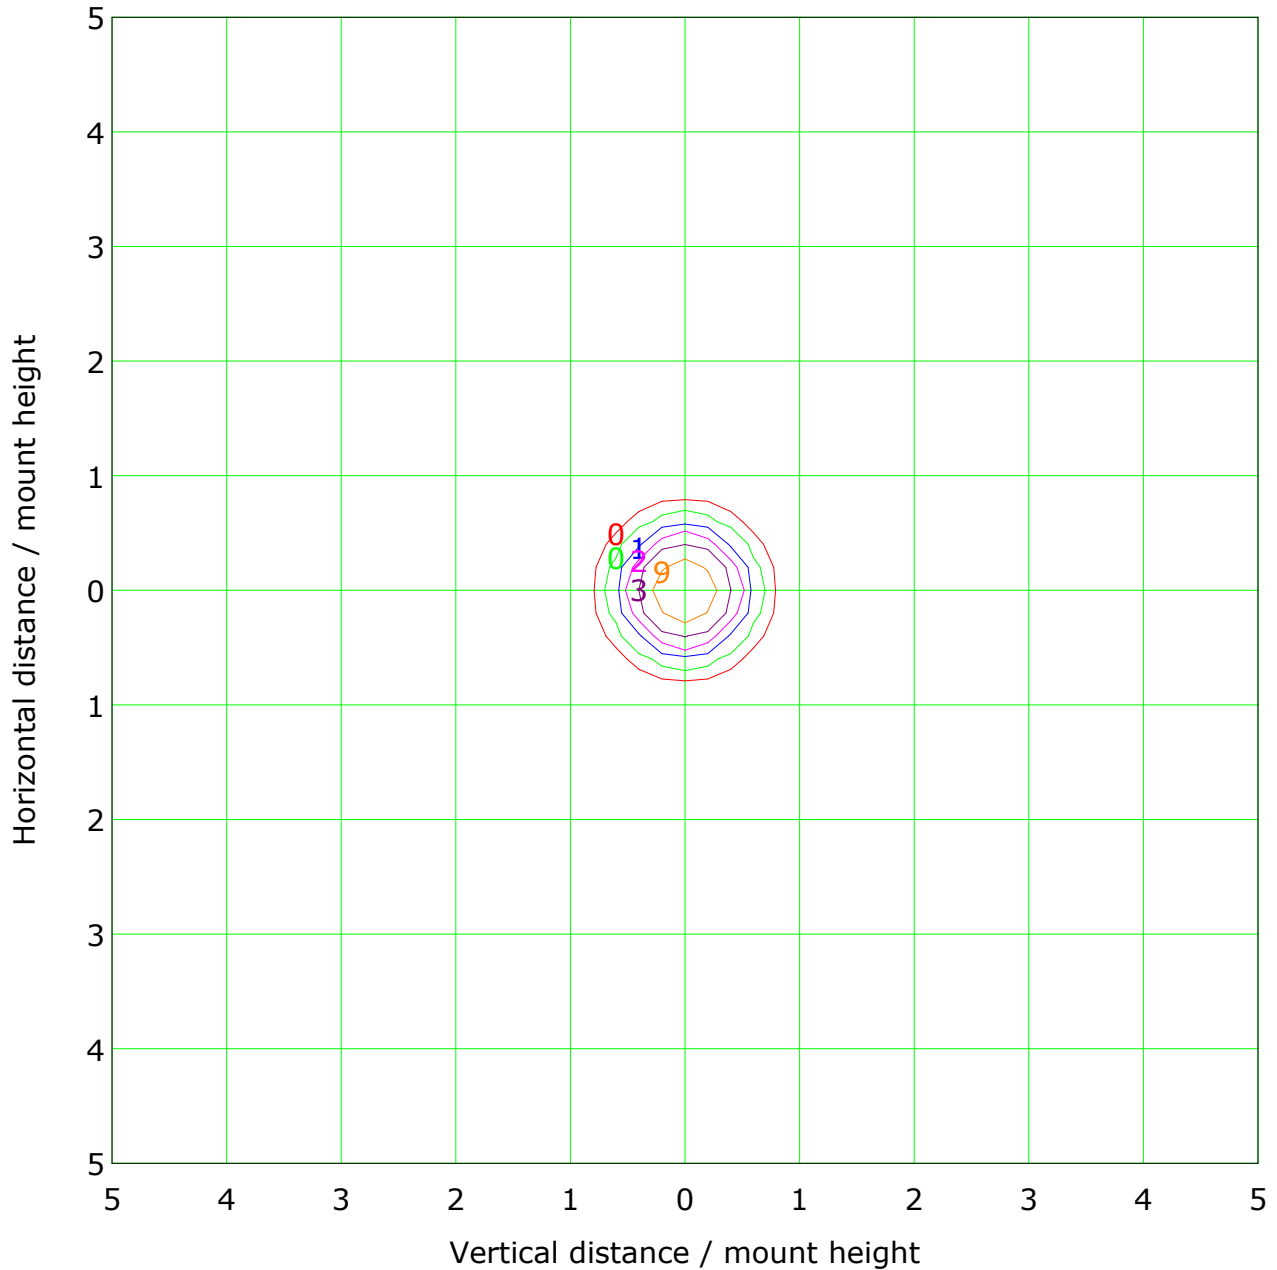

Mounting Height: 10m Max Lux(100%): 17 lx			
— (1%):	0 lx	— (2%):	0 lx
— (5%):	1 lx	— (10%):	2 lx
— (20%):	3 lx	— (50%):	9 lx
— (100%):	17 lx		

C Plane (°):0.0-180.0: 180.0

Test Lab:

Test Type: TYPE C

Temperature:

Operator:

Gamma Plane (°):0.0-90.0:5.0


Test Device: CHL-6E

Distance: 3.000 m


Humidity:

Inspector:

Illuminance at a Distance

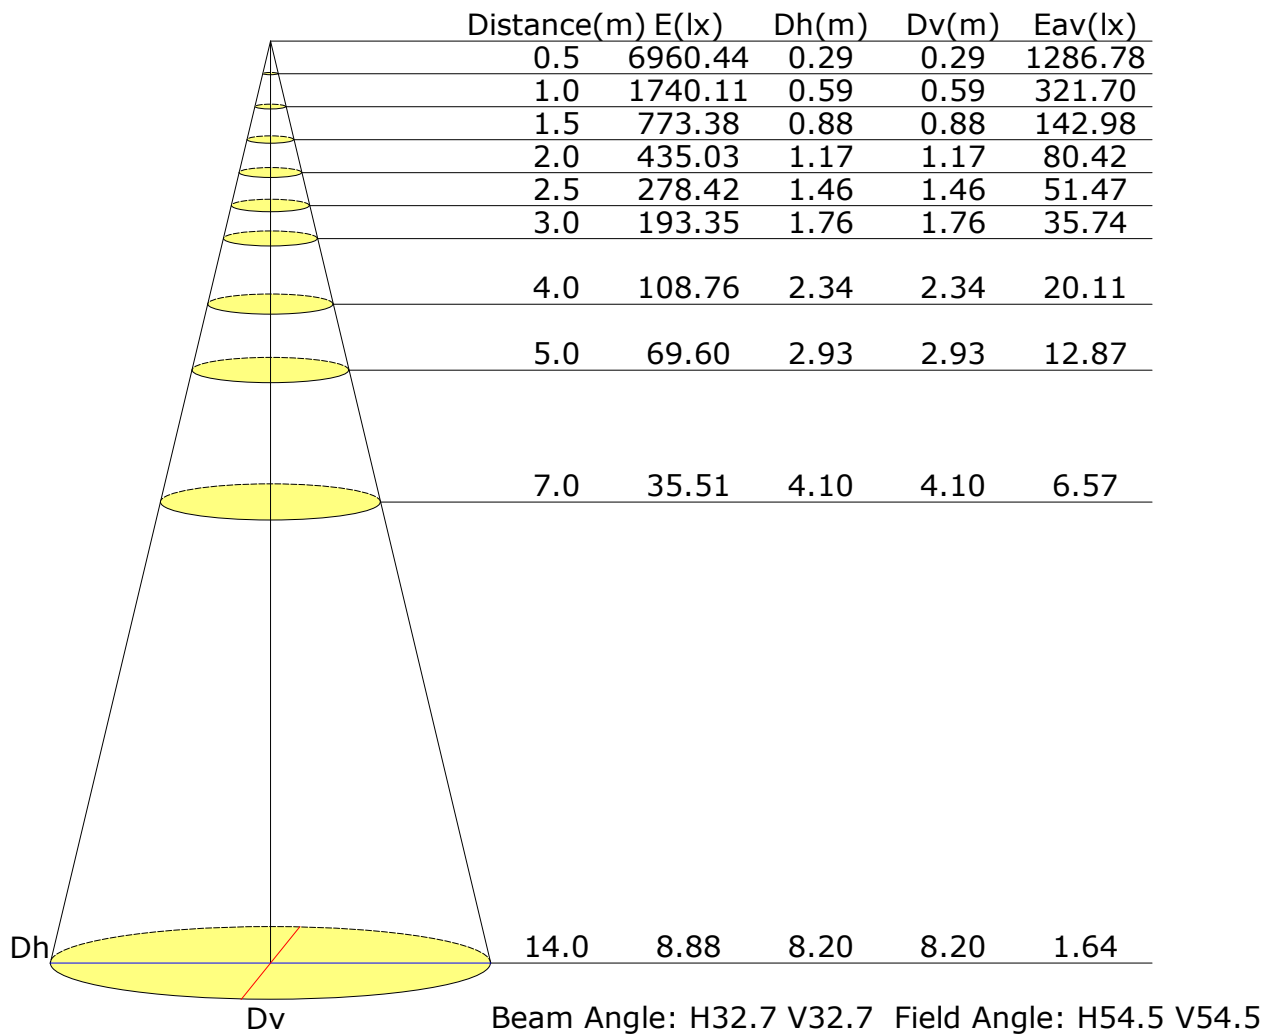

Vertical IsoLux Plot

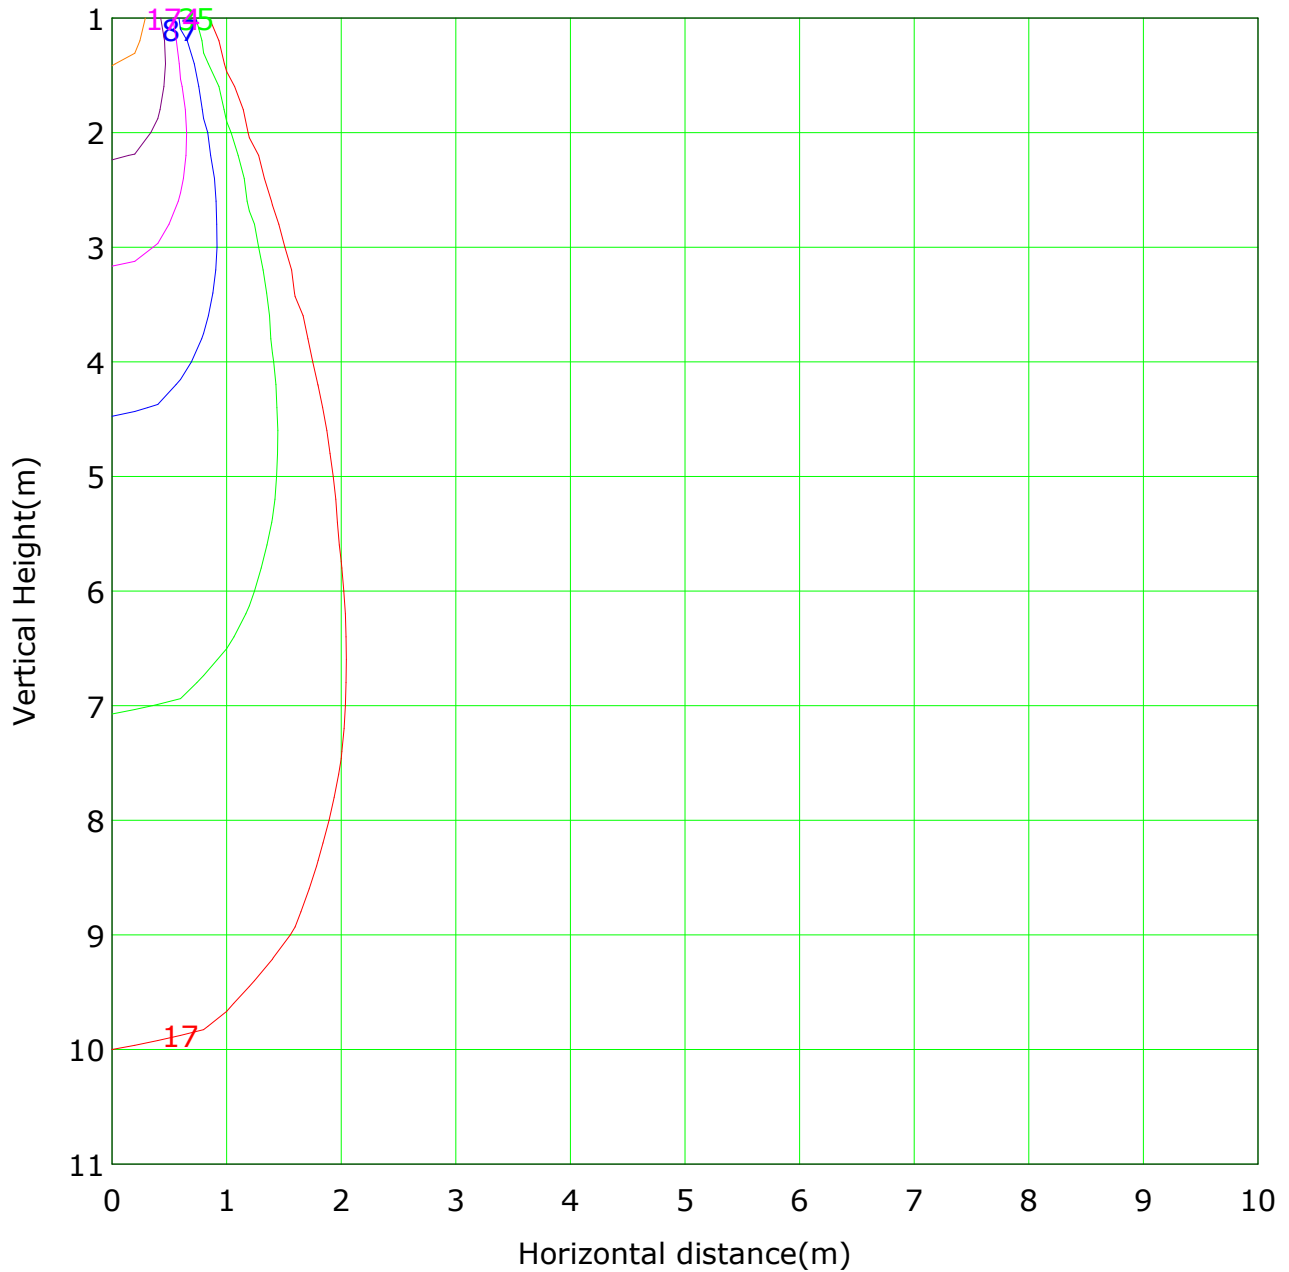


Lowest(m): 1m Highest(m): 11 Max Lux: 1740	
(1%): 17 lx	(2%): 35 lx
(5%): 87 lx	(10%): 174 lx
(20%): 348 lx	(50%): 870 lx
(100%): 1740 lx	

C Plane (°):0.0-180.0: 180.0
Test Lab:
Test Type: TYPE C
Temperature:
Operator:

Gamma Plane (°):0.0-90.0:5.0
Test Device: CHL-6E
Distance: 3.000 m
Humidity:
Inspector:

The average illuminance effective figure

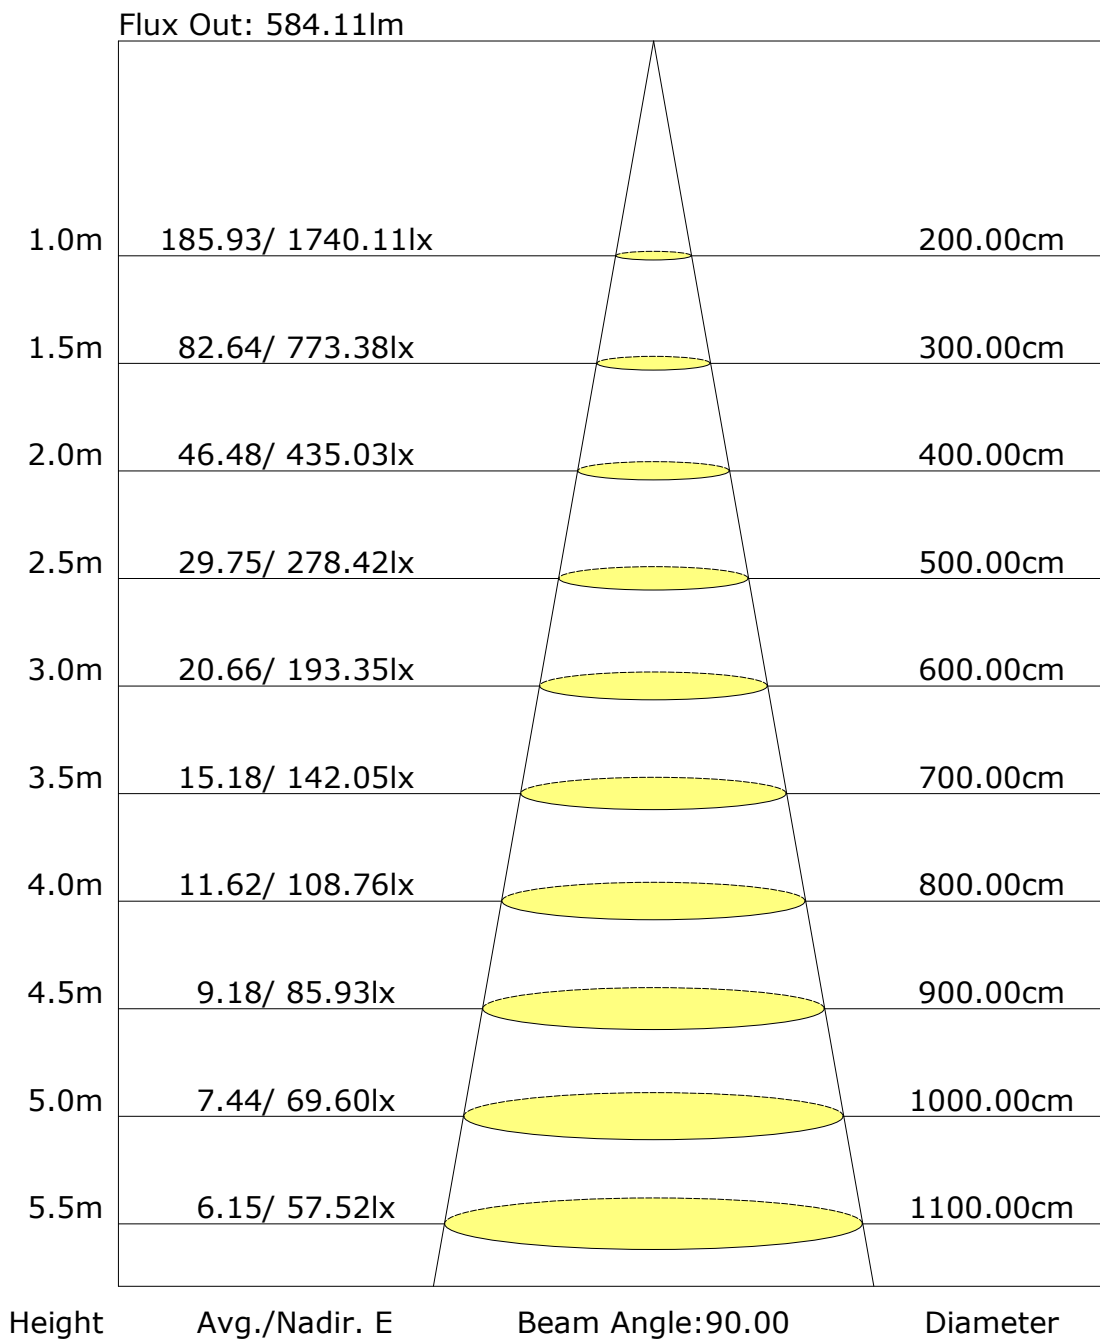

C Plane (°): 0.0-180.0: 180.0
Test Lab:
Test Type: TYPE C
Temperature:
Operator:

Gamma Plane (°): 0.0-90.0: 5.0
Test Device: CHL-6E
Distance: 3.000 m
Humidity:
Inspector:

Zonal Lumen

[illegible]

C Plane (°):0.0-180.0: 180.0

Test Lab:

Test Type: TYPE C

Temperature:

Operator:

Gamma Plane (°):0.0-90.0:5.0

Test Device: CHL-6E

Distance: 3.000 m

Humidity:

Inspector:

Candlepower Table

Unit: cd

[illegible]

C Plane (°):0.0-180.0: 180.0

Test Lab:

Test Type: TYPE C

Temperature:

Operator:

Gamma Plane (°):0.0-90.0:5.0

Test Device: CHL-6E

Distance: 3.000 m

Humidity:

Inspector: